

WATER ALARM DETECTOR

GENERAL FEATURES

Warnings

- It should be bonded to a high point from the device surface.
- The probe must be placed that touches the ground by opening the adhesive.
- Alkaline batteries should be used.
- The battery has a standby life of 2 years. If you stay in the alarm for a long time (max. 7 hours), the batteries must be checked and replaced by the user.

Instruction Manual

- Remove the device from the case.
- Remove the battery from nylon and open the back cover of the device.
- Connect the sensor to the appropriate socket by supplying the sensor cable.
- Make a check by touching the end of the sensor with a damp cloth.

The alarm LED should be on and the alarm should be buzzing (when the button on bottom is on). The siren will shut down when the button is switched off. But the LED will continue to on.

When the probe gets out of the humid situation, the LED will also go out. Leave the button on.

- Mount the sensor on the floor with the glue behind it.
- If you are using the relay output, you can connect it to your alarm panel, solenoid valve or similar control system.
- There is no need to change the battery because the device does not take any energy except for the alarm position.
- According to the date of manufacture, the battery standby life is 2 years.

The Ayvaz Water Raid Detector is used at homes, offices and similar places to prevent water flooding and take precautions. It is powered by 9V alkaline battery. NA / NK contact output is available. With relay output, solenoid valve is controlled to stop water leak.

By playing the siren, people benefit by drawing attention and taking precautions.


Advantages

- Long battery life.
- Can be connected to the alarm panel.
- Installation is easy.
- It is economical.

Application Areas

Operation and Computer Rooms, Generator & Compressor Rooms, Bath & Kitchen, Fire Alarm System, A/C Rooms, Warehouse

WET ALARM DETECTOR

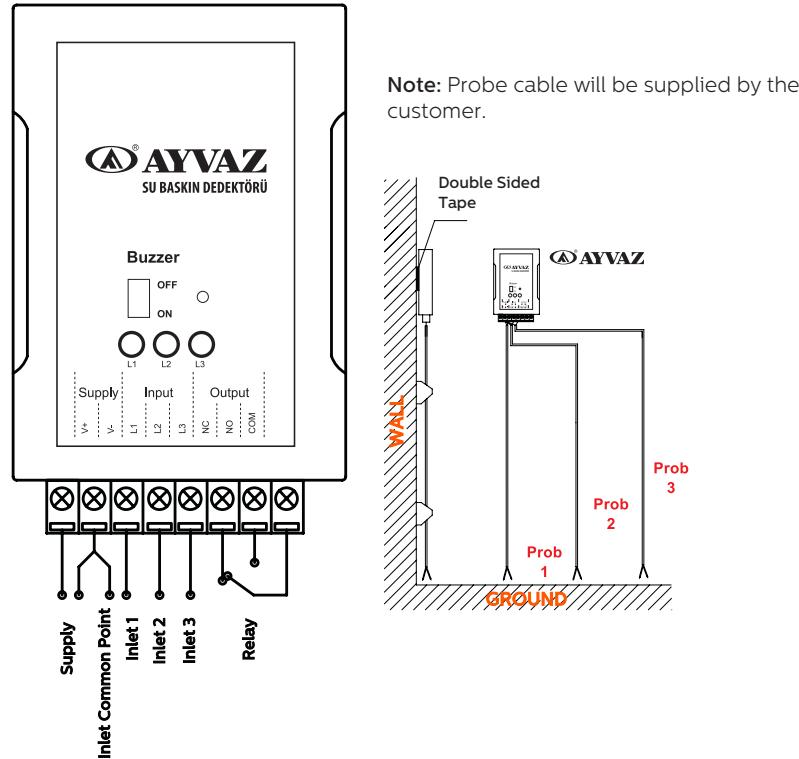

TECHNICAL SPECIFICATION	
Display	3 Alarm LEDs
Alarm	1 Alarm + ON/OFF Button
Sensor	Two point cable, 3 sensors can be connected to 1 meter standard device.
Supply	1x9 V (6LR22) Pil veya 24 VDC
Outlet	2A / 125 VAC NA - NK
Battery Life	Holding 2 years
Box	ABS Plastic, Black color (Opt. Light Gray) (1 product, 1 Battery, 1 Double-sided tape, 2 items for fixing the wall)
Weight (with Box)	190 gr.
Dimensions	70x100x22 mm



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
 Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
 info@ayvaz.com | www.ayvaz.com

Caserta/Italy
 Tel: +39 0823 187 3988
 rmolaro@ayvaz.com

Moscow/Russia
 Tel: +74959951728
 ayvazrus@ayvaz.com

Viernheim/Germany
 Tel: +49 62046014399
 germany@ayvaz.com

Kiev/Ukraine
 Tel: +380 44 390 57 57
 info@ayvaz.com.ua

Warsaw/Poland
 Tel: +48-32-783-295-1
 tricorr@tricorr.eu

Dubai/U.A.E
 Tel: +971 563550822
 +971 501306871
 mideast@ayvaz.com

Cixi City/China
 Tel: +86 574-58973851
 info@ayvazchina.com

Kazakhstan
 Tel: +7 (701) 066 066 1
 +90 (533) 760 34 66
 celyas@ayvaz.com

Isperih/Bulgaria
 Tel: +359 8431 27 32
 office@ayvaz-n.eu

Belgrad/Serbia
 Tel: +381 61 658 70 52
 yakbiyik@ayvaz.com