


**DESCRIPTION**


Solenoid pilot 2 way normally closed. Tube Ø13.

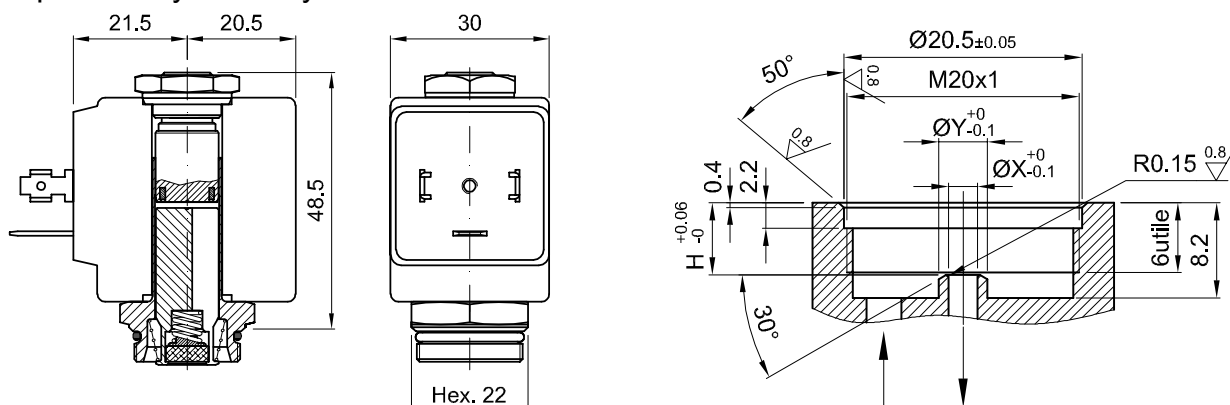

| CODE<br>S.Steel<br>Tube | ØX<br><br>mm | H<br><br>mm | ØY<br><br>mm | Differential pressure<br>bar |     |     | Nominal power    |                   |                | Coil   |       | Seal<br><br>①            | Temp.<br>range<br><br>°C        |
|-------------------------|--------------|-------------|--------------|------------------------------|-----|-----|------------------|-------------------|----------------|--------|-------|--------------------------|---------------------------------|
|                         |              |             |              | Min                          | Max |     | AC<br><br>Inrush | VA<br><br>Holding | DC<br><br>Watt | Series | Width |                          |                                 |
|                         |              |             |              |                              | AC  | DC  |                  |                   |                |        |       |                          |                                 |
| E610...                 | 1.5          | 6.2         | 4.2          | 0                            | 30  | 26  | 20               | 15                | 10             | 2      | 30    | NBR=B<br>EPDM=E<br>FPM=V | -10 +90<br>-10 +140<br>-10 +140 |
|                         | 2            | 6.2         | 4.2          | 0                            | 22  | 20  |                  |                   |                |        |       |                          |                                 |
|                         | 2.5          | 6.2         | 4.2          | 0                            | 16  | 14  |                  |                   |                |        |       |                          |                                 |
|                         | 3.5          | 6.2         | 6.2          | 0                            | 10  | 8   |                  |                   |                |        |       |                          |                                 |
|                         | 4.5          | 6.4         | 6.2          | 0                            | 6.5 | 3.5 |                  |                   |                |        |       |                          |                                 |
|                         | 5.2          | 6.4         | 6.2          | 0                            | 4   | 1.8 |                  |                   |                |        |       |                          |                                 |


**DESCRIPTION**

Solenoid pilot 2 way normally open. Tube Ø13.

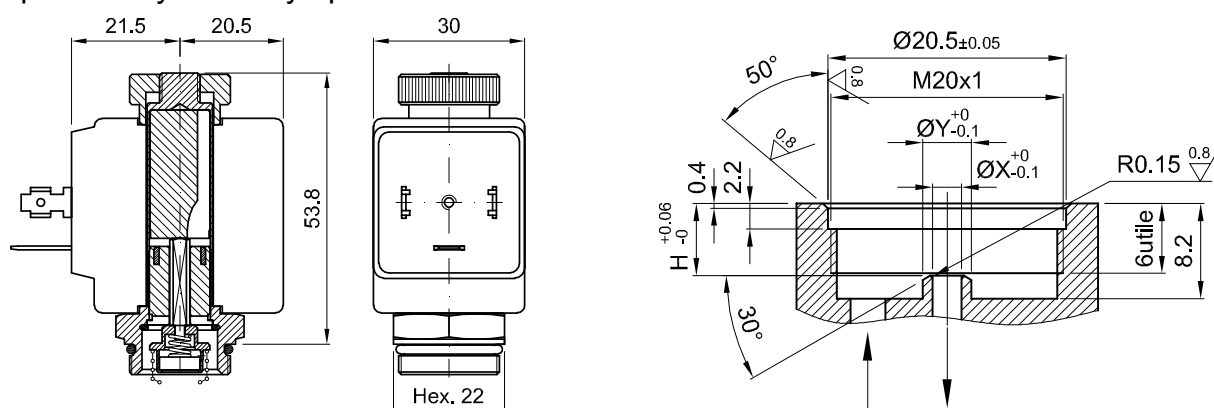

| CODE          |                 | ØX<br><br>mm | H<br><br>mm | ØY<br><br>mm | Differential pressure<br>bar |     |       | Nominal power |         |      | Coil   |       | Seal<br><br>①            | Temp.<br>range<br><br>°C        |
|---------------|-----------------|--------------|-------------|--------------|------------------------------|-----|-------|---------------|---------|------|--------|-------|--------------------------|---------------------------------|
| Brass<br>Tube | S.Steel<br>Tube |              |             |              | Min                          | Max |       | AC            | VA      | DC   | Series | Width |                          |                                 |
|               |                 |              |             |              |                              | AC  | DC    | Inrush        | Holding | Watt |        |       |                          |                                 |
| E620...       | E622            | 1.5          | 6.2         | 4.2          | 0                            | 23  | 23    | 20            | 15      | 10   | 2      | 30    | NBR=B<br>EPDM=E<br>FPM=V | -10 +90<br>-10 +140<br>-10 +140 |
|               |                 | 2            | 6.2         | 4.2          | 0                            | 17  | 17    |               |         |      |        |       |                          |                                 |
|               |                 | 2.5          | 6.2         | 4.2          | 0                            | 12  | 12    |               |         |      |        |       |                          |                                 |
|               |                 | 3.5          | 6.2         | 6.2          | 0                            | 7   | 4 ③   |               |         |      |        |       |                          |                                 |
|               |                 | 4.5          | 6.4         | 6.2          | 0                            | 4.5 | 3 ③   |               |         |      |        |       |                          |                                 |
|               |                 | 5.2          | 6.4         | 6.2          | 0                            | 3   | 2.2 ③ |               |         |      |        |       |                          |                                 |

Solenoid pilot 3 way normally closed. Tube Ø13.

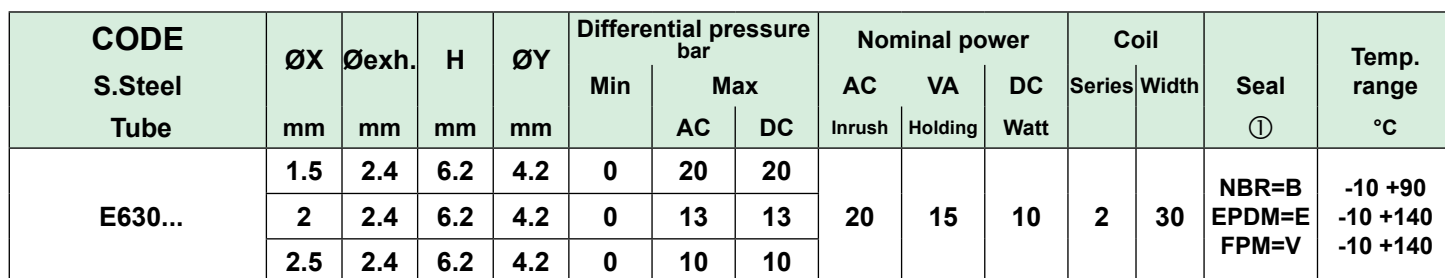

Solenoid pilot 2 way normally closed. Tube Ø13 flange fixing.

