


Part number: **I30000006** Model: **SI30-A10 NO**



Dimension in mm

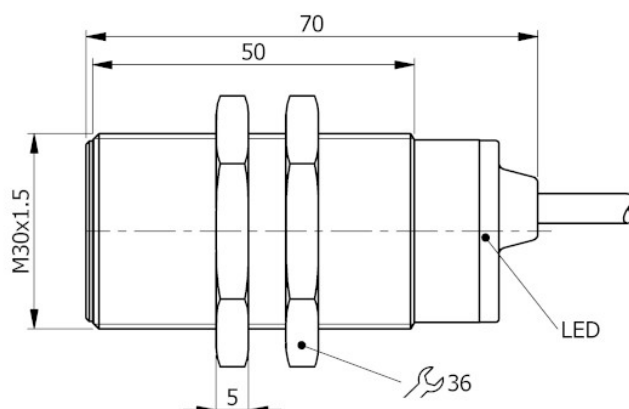

1. TECHNICAL CHARACTERISTICS

Electrical data

Power supply type:	Alternating current
Working voltage: [V]	20 ÷ 250
Protection class:	III

Outputs

Function:	NO
Max voltage drop: [V]	< 6
Max output current: [mA]	300
Minimum output current: [mA]	5
Max peak current: [A]	1.5
Residual current: [mA]	< 1
Max switching frequency: [Hz]	12

Detection zone

Switching distance-Sn: [mm]	10
Real sensing distance-Sr: [mm]	10 ±10%
Operative distance-So: [mm]	0 ÷ 8.10

Accuracy and Deviations

Correction factor:	Stainless steel: 0.9 - Brass: 0.5 - Aluminium: 0.4 - Copper: 0.4
Hysteresis: [%Sr]	< 10
Switching point drift: [%Sr]	-10 ÷ +10
Repeatability: [%Sn]	< 3

Environmental conditions

Temperature limits: [°C]	-25 ÷ +70
IP rating:	IP65-IP66-IP67

Display and control elements

Display:	Output switching status - 1 x LED: Yellow
----------	---

Mechanical data

Housing:	Threded type
Thread designation:	M30x1.5
Dimensions: [mm]	M30x1.5 - L=70
Materials:	Housing: Nickel-plated brass - Sensing area: PC blue - Lock nuts: Nickel-plated brass
Mounting:	Embeddable
Weigth: [g]	220

Electrical connection

Cable:	2 m - PVC/PVC - 2 x 0.50 mm ²
--------	--


Compliance to Standards / Directives

Directives compliance:	2014/30/EU -Electromagnetic compatibility directive (EMC) 2014/35/UE -Low voltage directive (LVD)
Standards compliance:	EN60947-5-2 - Product standard


2. NORME DI INSTALLAZIONE

WIRING DIAGRAM


2 WIRES CABLE

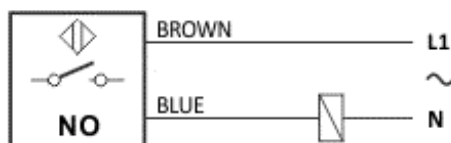

INSTRUCTIONS FOR CORRECT INSTALLATION



Side by side mounting

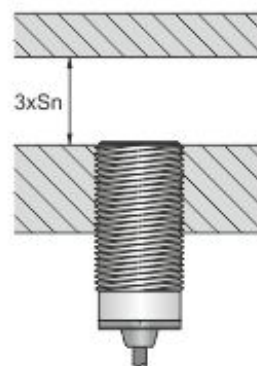

Flush mounting