


Part number: **I08000017** Model: **SI8-C1 PNP NC**



Dimension in mm

1. TECHNICAL CHARACTERISTICS

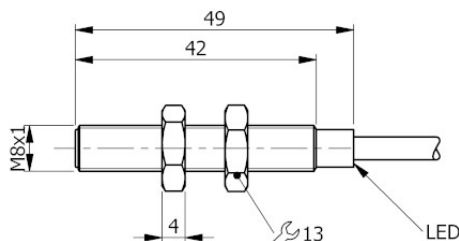

Electrical data

Power supply type:	Direct current
Working voltage: [V]	6 ÷ 30
Current consumption: [mA]	< 12 mA @ 24Vdc
Protection class:	III
Reverse polarity protection:	Presente

Outputs

Electrical design:	PNP
Function:	NC
Max voltage drop: [V]	< 1.8
Max output current: [mA]	200
Max switching frequency: [Hz]	2000
Short circuit protection:	Present
Type of short-circuit protection:	Pulsed
Overload protection:	Present

Detection zone

Switching distance-Sn: [mm]	1.5
Real sensing distance-Sr: [mm]	1.5 ±10%
Operative distance-So: [mm]	0 ÷ 1.22

Accuracy and Deviations

Correction factor:	Stainless steel: 0.9 - Brass: 0.5 - Aluminium: 0.4 - Copper: 0.4
Hysteresis: [%Sr]	< 10
Switching point drift: [%Sr]	-10 ÷ +10
Repeatability: [%Sn]	< 3

Environmental conditions

Temperature limits: [°C]	-25 ÷ +70
IP rating:	IP65-IP66-IP67

Display and control elements

Display:	Output switching status - 1 x LED: Yellow
----------	---

Mechanical data

Housing:	Threded type
Thread designation:	M8x1
Dimensions: [mm]	M8x1 - L=50
Materials:	Housing: AISI 303 - Sensing area: POM red - Lock nuts: Nickel-plated brass
Mounting:	Embeddable
Weigth: [g]	60

Electrical connection

Cable:	2 m - PVC/PVC - 3 x 0.14 mm ²
--------	--


Compliance to Standards / Directives

Directives compliance:	2014/30/EU -Electromagnetic compatibility directive (EMC)
Standards compliance:	EN60947-5-2 - Product standard

2. NORME DI INSTALLAZIONE

WIRING DIAGRAM

3 WIRES CABLE

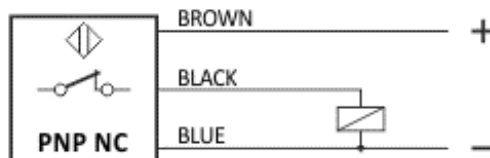

INSTRUCTIONS FOR CORRECT INSTALLATION

