


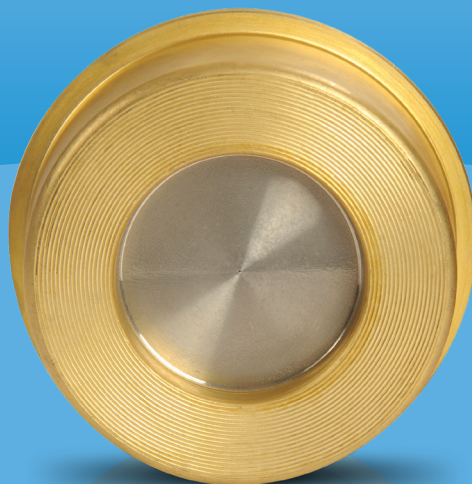

CV-10P

DISCO CHECK VALVE/BRASS

GENERAL FEATURES

Check valves are commonly used armatures that can be applied for liquid, gaseous and steam applications. They increase the process safety and can be used instead of complicated armatures. Because of short installation time and installation distance, small dimensions; Ayvaz disco check valve appears to be advantageous.

Check valves provide the flows just one way. When liquid flows through to flowing direction, check valves open and let it pass. But liquid tries to flow opposite direction of flowing, check valves close and prevent passing.

Product Features:

Body: MS58 Brass
Spring, Disc, Segment: Stainless Steel

Working temperature:

According to material from
-10°C to 250°C.

Connections:

Wafer type

Nominal Diameter:

DN15 (1/2") – DN100 (4")

Working Pressure:

Max 16 bar

Applications

- Iron, steel, mining industry
- Heating, ventilation pipelines
- Mineral and oil industry
- Woodworking and paper industry
- The textile industry
- Water, condensate and steam lines
- Shipbuilding

DIAMETERS	
DN (mm)	inch
15-100	1/2" - 4"


CONNECTION
ÇV-10P
BS 10 tables D, E, F DIN 2501 (pN 6/10/16) ANSI B 16.1 class 125 FF between flanges

WEIGHTS									
Connection Type	Flanged								
Diameter (mm)	15	20	25	32	40	50	65	80	100
Weight (kg)	0,09	0.12	0.19	0.36	0.55	0.95	1.26	2.18	3.26

Can be install every direction.

CV-10P DISCO CHECK VALVE / BRASS

The curves given in the chart are valid for water at 20°C.
To read the pressure drop for other fluids the equivalent water volume flow rate must be calculated and used in the graph.
The values indicated in the chart are applicable to spring-loaded valves with horizontal flow.


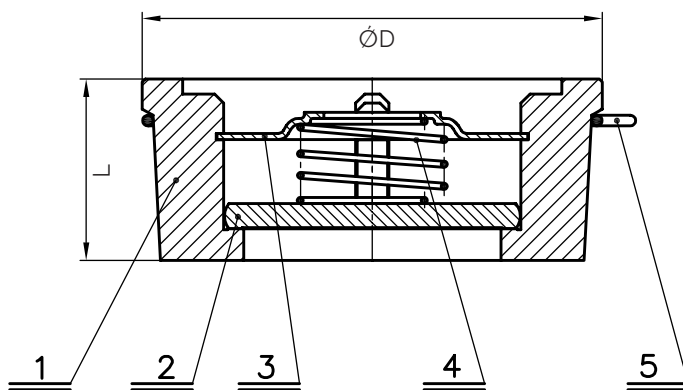


SPARE PARTS		CV 10/P
1	Body	MS58 Brass
2	Disc	Stainless Steel
3	Spring Press Segment	Stainless Steel
4	Disc Press Segment	Stainless Steel
5	Centering Cylinder	Stainless Steel

DIMENSIONS									
Dia. mm	15	20	25	32	40	50	65	80	100
L (mm)	16	19	21	27	31	40	46	50	60
D (mm)	39	46	54	70	80	96	113	130	150

OPEN PRESSURE MBAR				
DN	Flow Direction			
	Without Spring ↑	With Spring ↑ ⇒ ↓		
15	2.5	25	22.5	20
20	2.5	25	22.5	20
25	2.5	25	22.5	20
32	3.5	27	23.5	20
40	4	28	24	20
50	4.5	29	24.5	20
65	5	30	25	20
80	5.5	31	25.5	20
100	6.5	33	26.5	20

Pressure Drop Chart

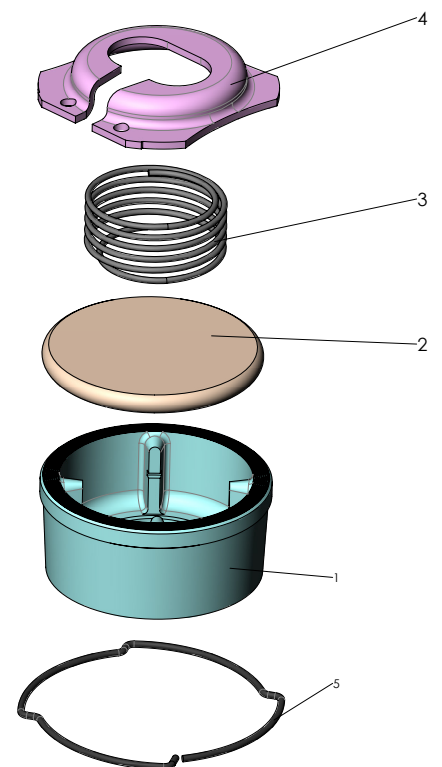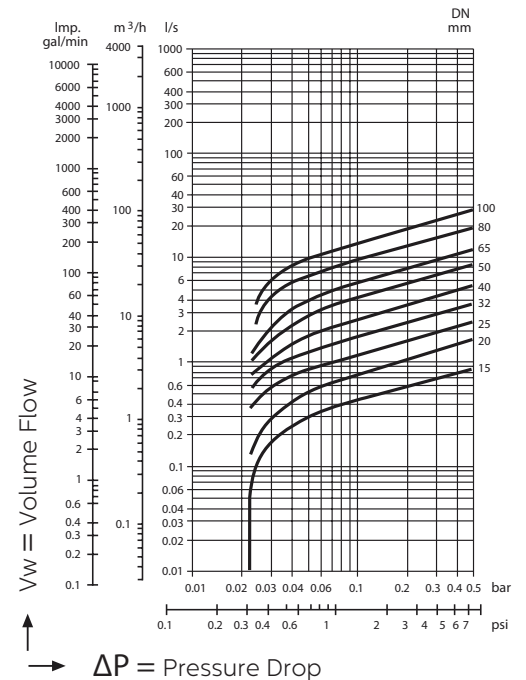

HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Caserta/Italy

Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Moscow/Russia

Tel: +74959951728
ayvazrus@ayvaz.com

Viernheim/Germany

Tel: +49 62046014399
germany@ayvaz.com

Kiev/Ukraine

Tel: +380 44 390 57 57
info@ayvaz.com.ua

Warsaw/Poland

Tel: +48-32-783-295-1
tricorn@tricorn.eu

Dubai/U.A.E

Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Cixi City/China

Tel: +86 574-58973851
info@ayvazchina.com

Kazakhstan

Tel: +7 (701) 066 066 1
+90 (533) 760 34 66
celyas@ayvaz.com

Isperih/Bulgaria

Tel: +359 8431 27 32
office@ayvaz-n.eu

Belgrad/Serbia

Tel: +381 61 658 70 52
yakbiyik@ayvaz.com