




FLEXIBLE, EX-PROOF PROTECTION HOSES

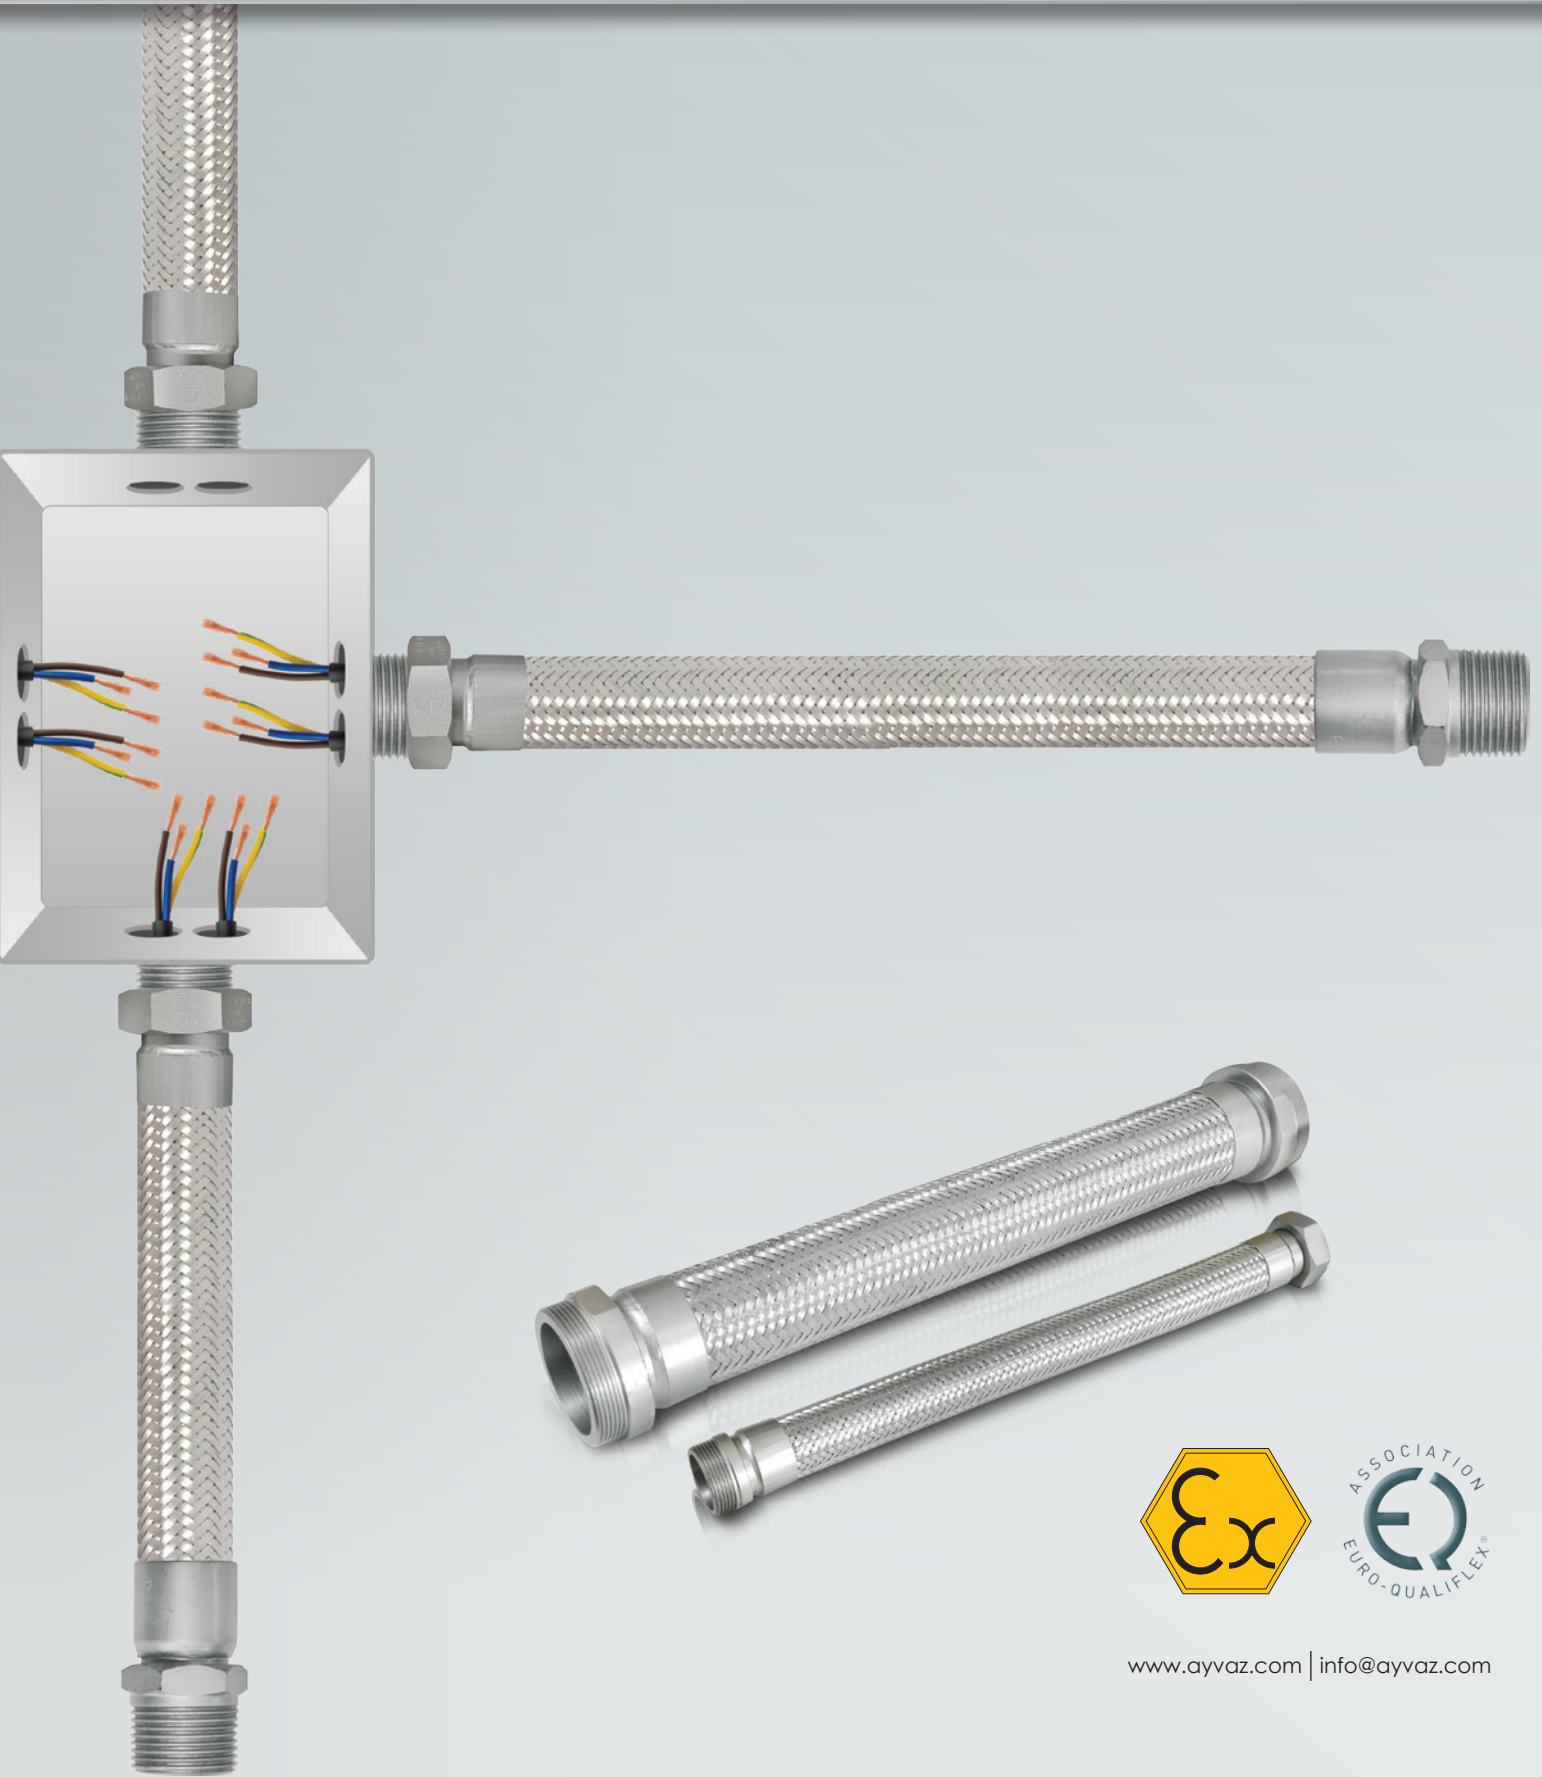

www.ayvaz.com | info@ayvaz.com

FLEXIBLE, EX-PROOF PROTECTION HOSES

Meaning of Explosion Proof

The petroleum usually evaporates in normal temperature, and is dangerous enough to be ignited or explode by a tiny electric spark including open-close operation of a switch or a static spark according to its evaporative condition or temperature. Also, gases including LPG and LNG could cause the exactly same dangerous condition when leaked and mixed with the air. Where this phenomenon happens is called, "Hazardous area" and any electric equipment used there is required to be "Explosion-proof".

Explosion proof is a term used to describe electrical and non-electrical fixtures that are designed and constructed to both withstand explosions and prevent explosions from occurring.

Explosion Proof Class Ratings

Class I

Environments containing flammable gases or vapors.

Class II

Environments containing combustible dusts.

Class III

Environments containing easily ignitable fibers or flyings

Flexible Metal Hose as Explosion Proof Apparatus

According to NFPA (National Fire Protection Association) "Apparatus enclosed in a case that is capable of withstanding an explosion of a specific gas or vapor that may occur within it and of preventing the ignition of a specified gas or vapor surrounding the enclosure by sparks, flashes, or explosion of the gas or vapor within, and that operates at such an external temperature that a surrounding flammable atmosphere will not be ignited thereby."

Ayvaz flexible metal hoses are widely used as a protective cover for electric cables which are potentially subjected to produce sparks or arcs. Main purpose of the hoses is to prevent.

Hazardous areas that needs explosion-proof electric apparatus.

1. Petro-based product factory
2. Petroleum refinery plant
3. Tunnel digging site (Methane gas)
4. LP gas filling-up station
5. Crude oil base, LNG base
6. Petro/natural gas stockpiling area
7. Thermal power plant
8. Dyeing Factory (Paint)


Service Life and Installation

Service life of the hose is mainly dependent on the working conditions, application angle and temperature, correct installation is also very influential on the service life. For optimum service life of the hose assembly following features should be provided; The hose line should be installed without exposed to twisting.

- No torsion stress must occur neither during the assembly, nor the operating. Otherwise, the service life of the hose falls.
- Both ends of the hose and the movement must be on the same plate.
- Only one end of the hose must be tightened first to be assured that no twisting on the hose assembly occurs. Afterwards, the hose must complete its movement for couple time while it is in neutral position under no torsions.
- Finally the other end of the hose must be connected.

HOSE DIMENSIONS



DN 8 (1/4")	DN 32 (1 1/4")
DN 10 (3/8")	DN 40 (1 1/2")
DN 12 (1/2")	DN 50 (2")
DN 16 (3/4")	DN 65 (2 1/2")
DN 20 (5/8")	DN 80 (3")
DN 25 (1")	DN 100 (4")

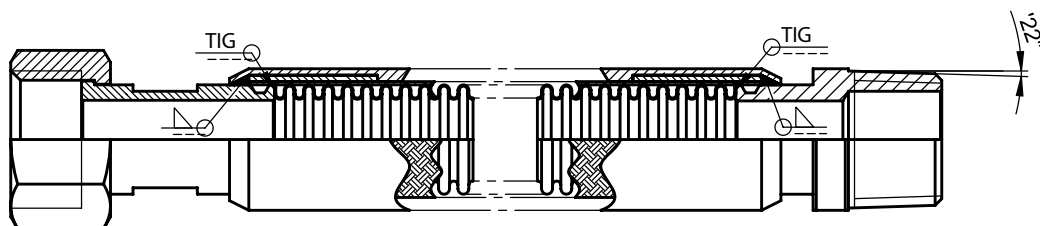



HOSE FEATURES

Hose Material:	Stainless Steel AISI 316L
Braiding Material:	Stainless Steel AISI 304
Fittings:	Carbon Steel – Stainless Steel
Certificate:	IEP 13 ATEX 0184U
Application:	II 2 G Ex-e II C/Gb; I M2 II 2 G Ex-tb II C/Db; IP66/67
Area:	Zone 1 & 2; 21 & 22
Temperature:	-20/+80 °C

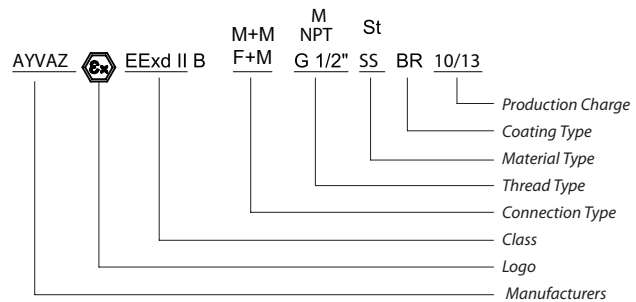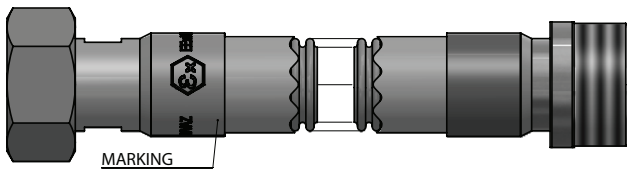

AYVAZ EX-PROOF CABLE PROTECTION SLEEVE TABLE

L Length			Internal Dia.	External Dia.	Thread Size	Connection Type
500 MM CODE	700 MM CODE	1000 MM CODE				Connection Fittings
AFH1-50	AFH1-70	AFH1-100	16	24	1/2"	M-M M-F F-F
AFH2-50	AFH2-70	AFH2-100	20	29	3/4"	
AFH3-50	AFH3-70	AFH3-100	25	35	1"	
AFH4-50	AFH4-70	AFH4-100	32	44	1 1/4"	
AFH5-50	AFH5-70	AFH5-100	40	54	1 1/2"	
AFH6-50	AFH6-70	AFH6-100	50	66	2"	
AFH7-50	AFH7-70	AFH7-100	65	82	2 1/2"	
AFH8-50	AFH8-70	AFH8-100	80	100	3"	
AFH9-50	AFH9-70	AFH9-100	100	122	4"	



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 25 60

Caserta/Italy Tel: +39 0823 187 3988 rmolaro@ayvaz.com	Moscow/Russia Tel: +74959951728 ayvazrus@ayvaz.com	Viernheim/Germany Tel: +49 62046014399 germany@ayvaz.com	Kiev/Ukraine Tel: +380 44 390 57 57 info@ayvaz.com.ua	Warsaw/Poland Tel: +48-32-783-295-1 tricorr@tricorr.eu
---	---	---	--	---

Dubai/U.A.E Tel: +971 563550822 +971 501306871 mideast@ayvaz.com	Xiamen/China Tel: +86 592-7018050 shanghai@ayvazchina.com xiamen@ayvazchina.com	Kazakhstan Tel: +7 (701) 066 066 1 +90 (533) 760 34 66 celyas@ayvaz.com	Isperih/Bulgaria Tel: +359 8431 27 32 office@ayvaz-n.eu
--	---	---	--

info@ayvaz.com | www.ayvaz.com