



MGK-33

MAGNETIC LEVEL GAUGES

GENERAL FEATURES

It is a convenient and safe device designed to combine the principles of lifting and pulling of electro-magnet. The magnets in the float enable you to follow the liquid change level with the help of red-white coloured flaps placed on the outer wall. It is suitable for use in systems requiring high pressure and temperature.

Advantages

- Continuous and easy monitoring
- Sealing construction
- Requested length and connection manufacturing
- Ability to work in different densities
- Manufacturing according to various installation types
- Long life time
- Easy maintenance
- Up to 6 meters can be manufactured in one piece.
- Works up to 200 °C in PN 10/16/25/40(Opt.) pressure class
- Self-cleaning feature of the system with up-and-down movement of the float

Application Areas

- All steam and hot water boilers
- Waste water systems
- Filling and unloading containers


- All chemical and petrochemical tanks
- Tanks for petroleum and petroleum products
- Oil boilers
- Diesel fuel tanks and generator sets
- Submarine, helicopter and ship fuel tanks

PRODUCT FEATURES

Body	: AISI 304 /316 Stainless Steel
Float	: AISI 316L Stainless Steel
Magnetic Disc	: Aluminium
Flap	: Aluminium
Connection	: Flange, M/F, Union
Flange Type	: DIN, ANSI, JIS
Flange Material	: Carbon Steel St. 37.2, Stainless Steel
Max. Working Pres.	: 10 bar
Max Working Temp.	: 200 °C
Contact	: YES
Protection Class	: IP66
Drain Plug	: 3/8"





MGK-33 MAGNETIC LEVEL GAUGES


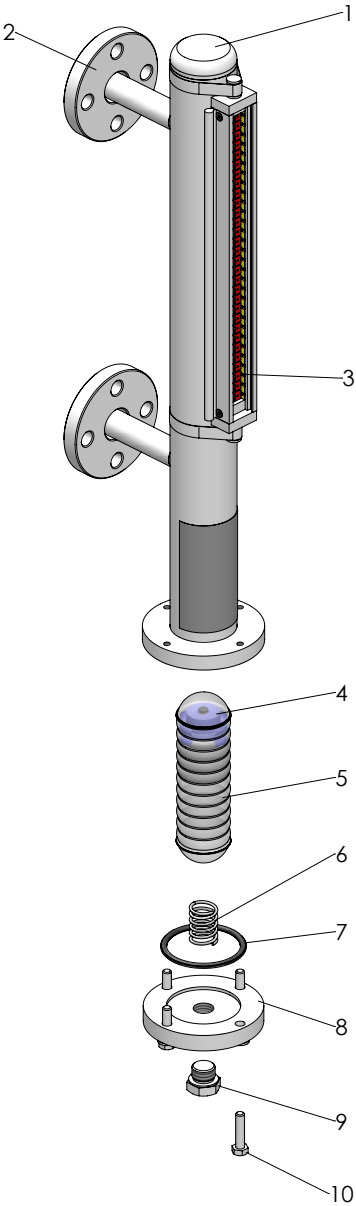


Spare Parts		
1	Body	Stainless Steel
2	Connection Flange	Carbon Steel, Stainless Steel
3	Flaps	Aluminium
4	Magnetic Disc	Magnet
5	Float	Stainless Steel
6	Float Spring	Spring Steel
7	O-Ring	Silicon
8	Drain Flange	Carbon Steel, Stainless Steel
9	Drain Bolt	Stainless Steel
10	Bolt	Stainless Steel

MGK-33 MAGNETIC LEVEL GAUGES

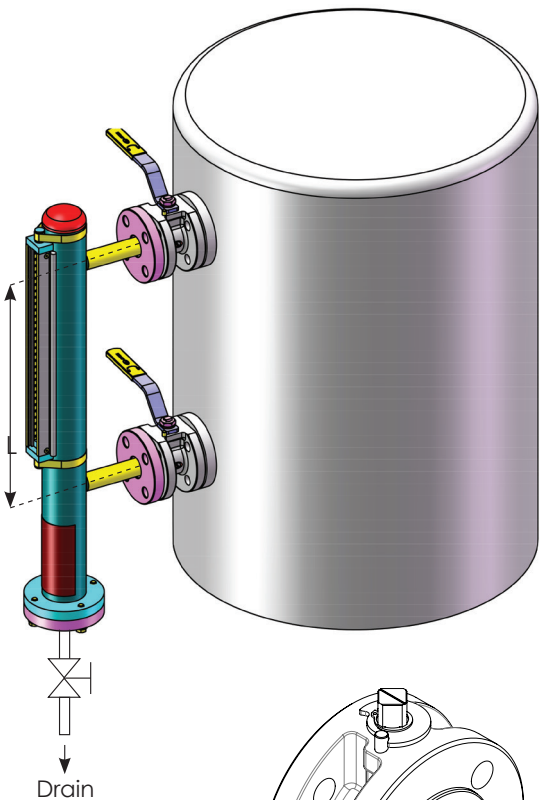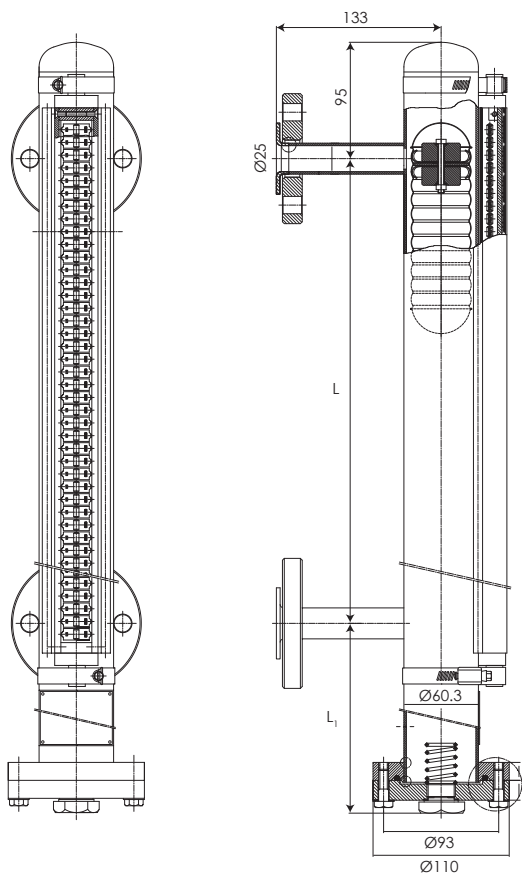


MBK-45
Monoblock Valve
Dimensions



You are required to inform sales team during the order

- Connection type and dimension (M/F, flange, diameter)
- Distance between connections
- (From the upper pipe center to the bottom pipe center)
- Fluid density to be used
- Fluid temperature

SPARE PART		
1	Connection Type	Flange, M/F, uNiON
2	Flange	Carbon Steel / Stainless Steel (DIN, ANSI, JIS)
3	Float	Stainless Steel (PN 16/25/40)
4	By-pass Tube	Stainless Steel (AISI 304 / 316)
5	Bolt	Stainless Steel
6	Drain Bolt	Stainless Steel
7	Magnetic Disc	Aluminium
8	Indicator Glass	Plexiglass

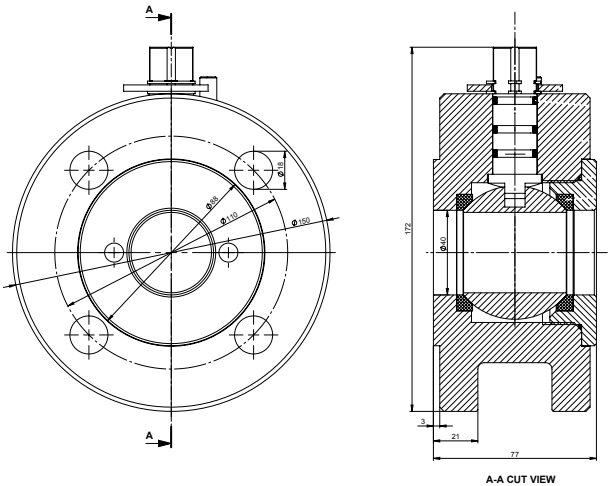

MGK-33 MAGNETIC LEVEL GAUGES



MGK-33 MAGNETIC LEVEL GAUGES



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Cona
Caserta/Italy
Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Ayvaz Russia
Moscow/Russia
Tel: +74959951728
ayvazrus@ayvaz.com

Ayvaz Germany
Viernheim/Germany
Tel: +49 62046014399
germany@ayvaz.com

Ayvaz Ukraine
Kiev/Ukraine
Tel: +380 44 390 57 57
info@ayvaz.com.ua

Tricorr
Warsaw/Poland
Tel: +48-32-783-295-1
tricorr@tricorr.eu

Haci Ayvaz M.E.
Dubai/U.A.E
Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Ayvaz China
Cixi City/China
Tel: +86 0574 5897 3851
info@ayvazchina.com

Ayvaz Kazakhstan LLP
Almaty/Kazakhstan
Tel: +7 (727) 327 97 57
info_kz@ayvaz.com
www.ayvaz.kz

Ayvaz N
Isperih/Bulgaria
Tel: +359 8431 27 32
office@ayvaz-n.eu

Ayvaz Serbia
Belgrad/Serbia
Tel: +381 61 658 70 52
yakbiyik@ayvaz.com