



MG-33SV

VALVE CONNECTION MODEL MAGNETIC LEVEL GAUGE

GENERAL FEATURES

Ayvaz MG-33SCV Magnetic Level Indicator is a light designed level indicator used in tanks that do not require pressure strength. It is a convenient and safe device designed to combine the principles of lifting and extracting of electro-magnet. The magnets in the float enable you to follow the liquid change level with the help of red-white coloured flaps placed on the outer wall. With the help of valves, it provides installation and repair without discharge the tank. Easy to read height with display scale.

Advantages

- Continuous and easy monitoring
- Sealing construction
- Requested length and connection manufacturing
- Ability to work in different densities
- Manufacturing according to various installation types
- Long life time • Easy maintenance • Lightweight

Application Areas

- All steam and hot water boilers
- Waste water systems
- Filling and unloading containers
- All chemical and petrochemical tanks
- Tanks for petroleum and petroleum products
- Oil boilers
- Diesel fuel tanks and generator sets
- Submarine, helicopter and ship fuel tanks


PRODUCT FEATURES

Body	: AISI 304 /316 Stainless Steel
Float	: AISI 316L Stainless Steel
Magnetic Disc	: Aluminium
Flap	: Plastic / Aliminium
Connection	: Flange, M/F, Union
Flange Type	: DIN, ANSI, JIS
Flange Material	: Carbon Steel St. 37.2, Stainless Steel
Max. Working Pres.	: 10 bar
Max Working Temp.	: 160 °C
Contact	: YES
Protection Class	: IP66
Drain Plug	: 3/8"




* Different size, connection, pressure and applications
Please consult our sales team.



MG-33SV VALVE CONNECTION MODEL MAGNETIC LEVEL GAUGE

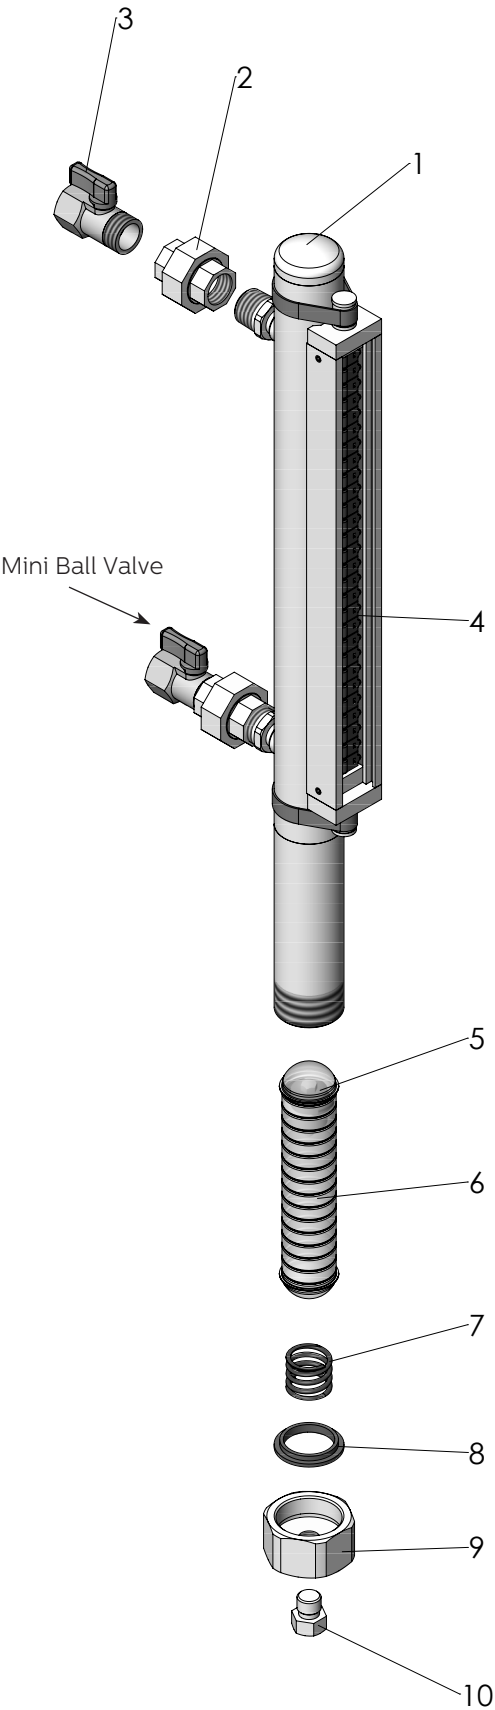

No	Part Name	Material List
1	Body	Stainless Steel
2	Connection	Stainless Steel
3	Ball Valve	Stainless Steel
4	Flaps	Aluminium/Plastic
5	Magnetic Disc	Aluminium
6	Float	Stainless Steel
7	Float Spring	Spring Steel
8	Gasket	Teflon
9	Nut	Stainless Steel
10	Stopper	Stainless Steel

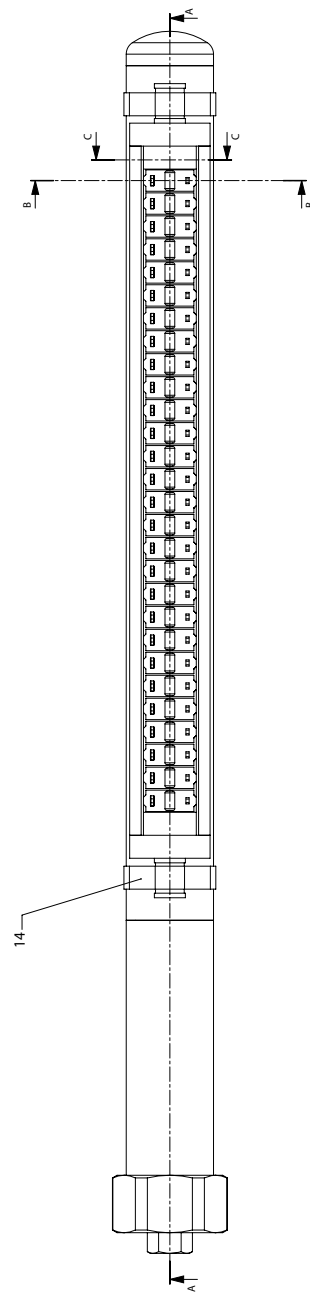

MG-33SV VALVE CONNECTION MODEL MAGNETIC LEVEL GAUGE

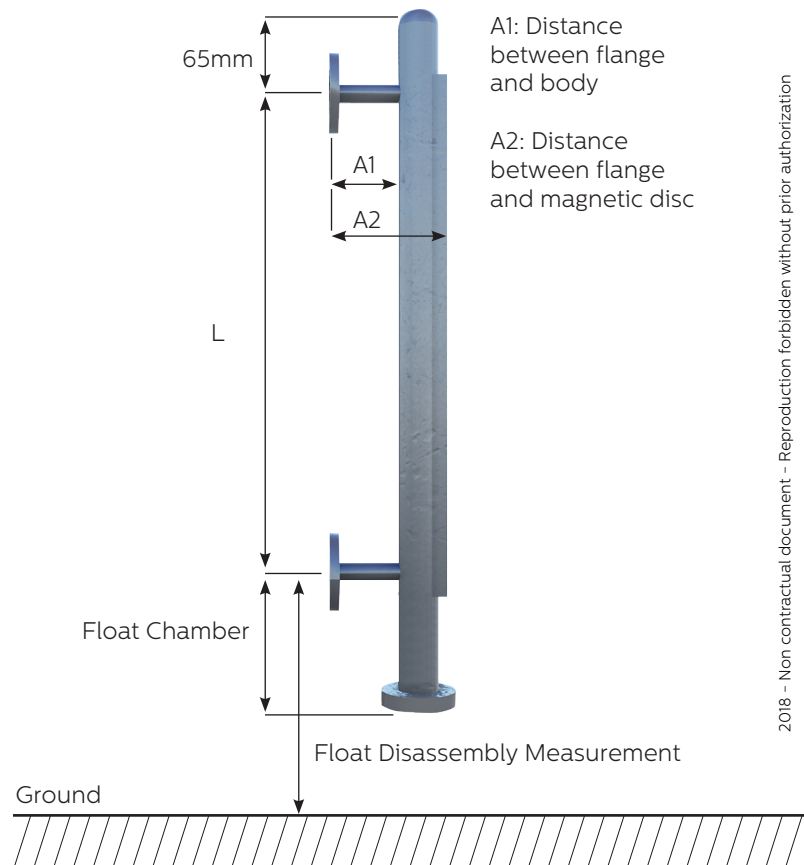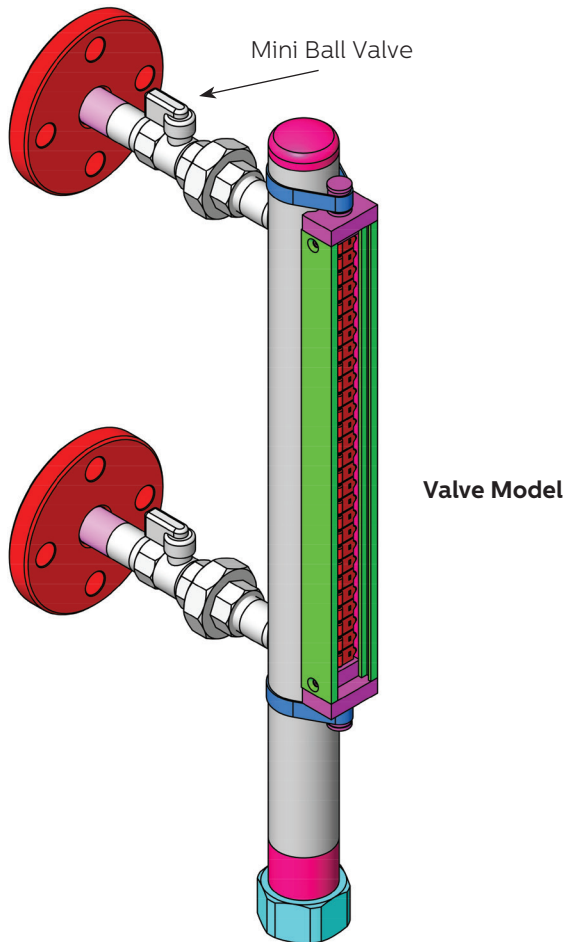

2018 - Non contractual document - Reproduction forbidden without prior authorization

PRODUCT FEATURES	
Body	AISI 304/316 Stainless Steel
Float	AISI 316L Stainless Steel
Magnetic Disc	Aluminium
Connection	Flange, M/F, Union
Flange Type	DIN, ANSI, JIS
Flange Material	Carbon SteelSt 37.2/ Stainless Steel (Opt.)
Max. Working Pressure	10 bar
Max. Working Temp.	160 °C
Contact	YES
Drain Plug	3/8"

Note:

Magnetic level gauge mounting height from the ground should be the minimum size of float disassembly measurement. If the float fails, it can be easily interrupted. The product can not be mounted if the level gauge is smaller than the float chamber measurement.

Fluid Density	Water 1 gr/cm ³	Diesel 0,88 gr/ cm ³	Fuel Oil 0,92 gr/ cm ³	Ammonia 0,65 gr/ cm ³
Float Chamber Meas.	22,5 cm	22,5 cm	22,5 cm	30 cm
Float Dissambly Meas.	42 cm	44 cm	45 cm	60 cm

MG-33SV VALVE CONNECTION MODEL MAGNETIC LEVEL GAUG

MG-33SV VALVE CONNECTION MODEL MAGNETIC LEVEL GAUGE



HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
info@ayvaz.com | www.ayvaz.com

Cona
Caserta/Italy
Tel: +39 0823 187 3988
rmolaro@ayvaz.com

Ayvaz Russia
Moscow/Russia
Tel: +74959951728
ayvazrus@ayvaz.com

Ayvaz Germany
Viernheim/Germany
Tel: +49 62046014399
germany@ayvaz.com

Ayvaz Ukraine
Kiev/Ukraine
Tel: +380 44 390 57 57
info@ayvaz.com.ua

Tricorr
Warsaw/Poland
Tel: +48-32-783-295-1
tricorr@tricorr.eu

Hacı Ayvaz M.E.
Dubai/U.A.E
Tel: +971 563550822
+971 501306871
mideast@ayvaz.com

Ayvaz China
Cixi City/China
Tel: +86 0574 5897 3851
info@ayvazchina.com

Ayvaz Kazakhstan LLP
Almaty/Kazakhstan
Tel: +7 (727) 327 97 57
info_kz@ayvaz.com
www.ayvaz.kz

Ayvaz N
Isperih/Bulgaria
Tel: +359 8431 27 32
office@ayvaz-n.eu

Ayvaz Serbia
Belgrad/Serbia
Tel: +381 61 658 70 52
yakbiyik@ayvaz.com