

Technical data

Pump

Delivery volume: 0,33 cm³ / stroke or revolution
(depending on operating temperature)

Barrel size: 20, 25, 50 and 200 kg
(dimensions acc. to DIN 6644)

Operating pressure: max. 300 bar

Pressure limiting valve adjusted to: max. 280 bar

Lubricating medium: greases up to NLGI-cl. 2
without solid contents

Operating temperature:

-17 to 70 °C (greases up to NLGI-cl. 2)

-25 to 70 °C (greases up to NLGI-cl. 1)

No. of outlets: 1

Outlet type: fitting with integrated non-return valve
including pressure limiting valve and
high pressure plug coupling

Sense of rotation: optional

Installation position: reservoir vertical as shown


Motor

Drive: d.c. geared motor


Operating voltage: 24 V DC

Current consumption: max. 5 A


Protection class: IP 54

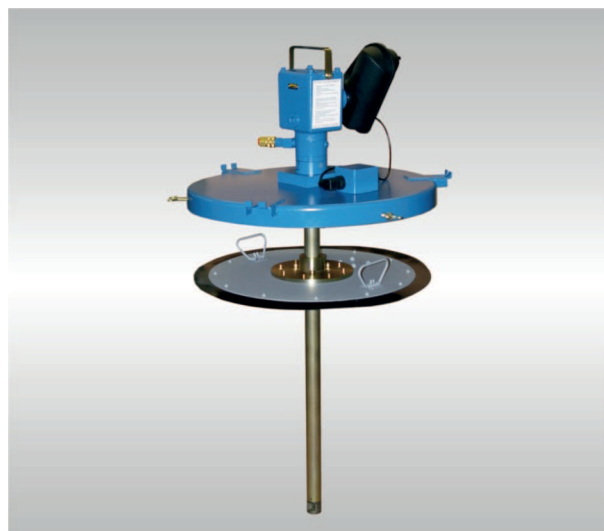


Symbol



Speed depending on operating pressure

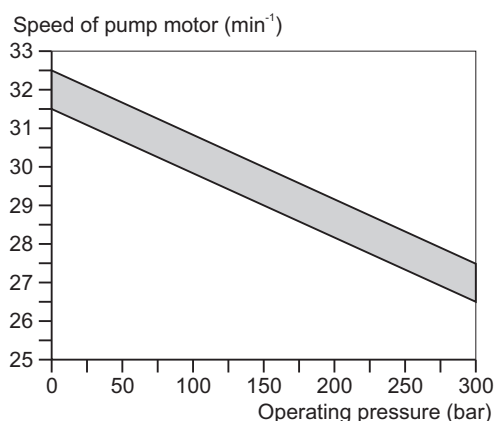

Delivery volume depending on temperature

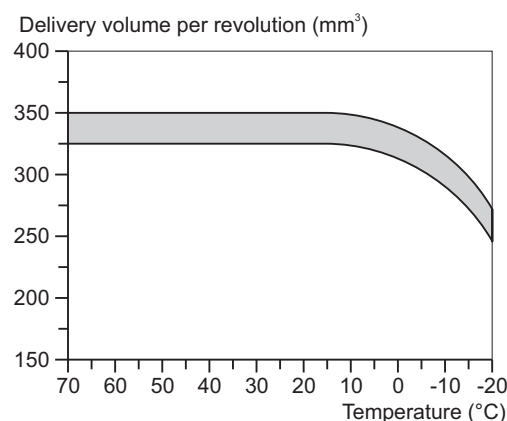


Order key for type 2196

Type number	2196					2196 01 01 03	
Code	2196						
Reservoir cover	with clip without clip						
Code	01 11						
Motor voltage	24 V DC						
Code	01						
Barrel size (kg)	20	25	50 (ØA* = 354 - 370)	50 (ØA* = 385 - 410)	200		
Code	03	04	05	05007	06		

* ØA see drawing
© BEKA 2014 All rights reserved!

Subject to alterations!

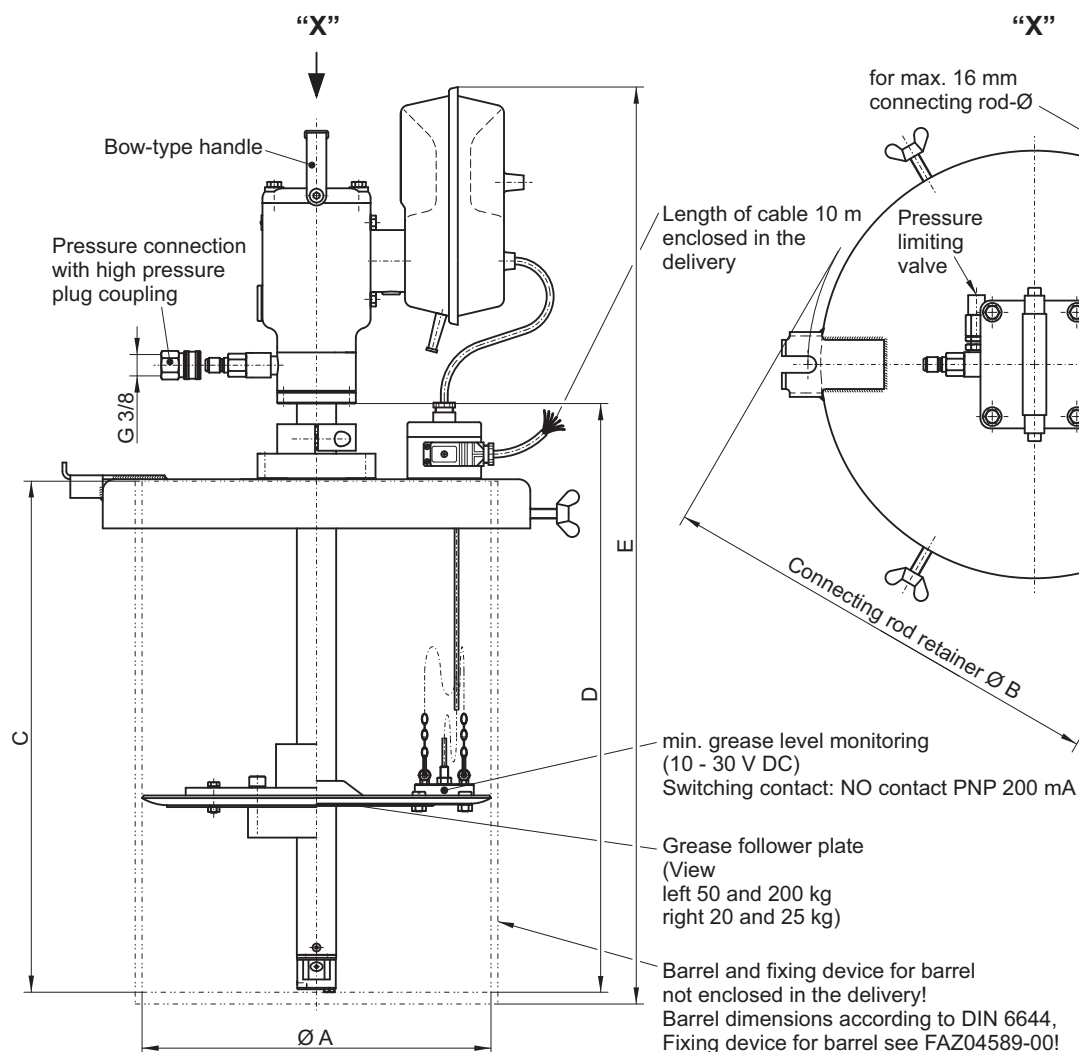

FAZ02342-00

Table dimensions

Barrel size (kg)	Ø A (mm)	Ø B (mm)	C max. (mm)	D (mm)	E ca. (mm)
20	265 - 285	345	375	423	800
25	311 - 331	404	475	523	900
50	354 - 370	460	672	720	1040
50	385 - 410	460	672	720	1040
200	550 - 590	666	893	941	1265

Wiring diagram level

