

Single Line Lubrication Systems

Pneumatic pumps



P605 without reservoir

Technical description

The pneumatic pump unit of type no. 2566 supplies the lubrication points via dynamic metering valves.


Method of operation

Lubrication starts when the piston is pressurized. The compressed air has to be adjusted in a way that the pressure relief valve only opens when all metering valves have lubricated. This ensures that all metering valves supply enough lubricant to the lub points.

When the 3/2-way solenoid valve switches, the piston is pushed into its original position. The main line is relieved down to < 1 bar by the relief valve and the metering valves restack the lubricant for the next lubrication pulse. At the same time, the lubricant is sucked out of the reservoir for the next stroke.

The metering valves' total dosage should not exceed 60% of the pump's delivery quantity.

Hydraulic plan

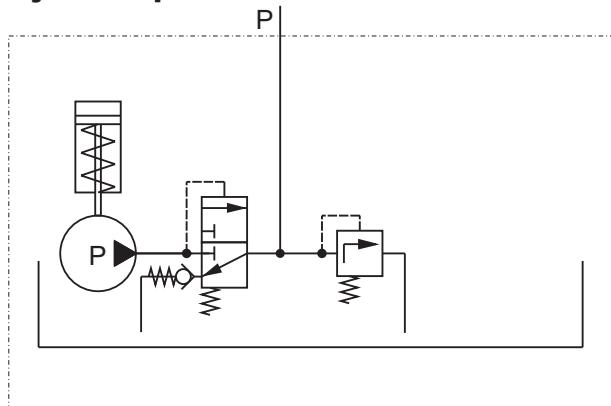

Pneumatic pumps

Technical Data

Pneumatic pump

Output rate: 3 cm³/stroke
9,5 cm³/stroke
15 cm³/stroke

Ratio: with 3 cm³/stroke 1 : 32
with 9,5 cm³/stroke 1 : 12
with 15 cm³/stroke 1 : 8

Flow pressure: 3 - 8 bar
Lubricant: oil, 20 - 700 mm²/s
fluid grease (according to release list)


Temperature range: medium 0 - 70°C
ambient 0 - 40°C

Operating mode:

Pneumatic actuation via 3/2-way solenoid valve.
Repositioning of the pump by spring force.

P605 without reservoir

Pneumatic pumps

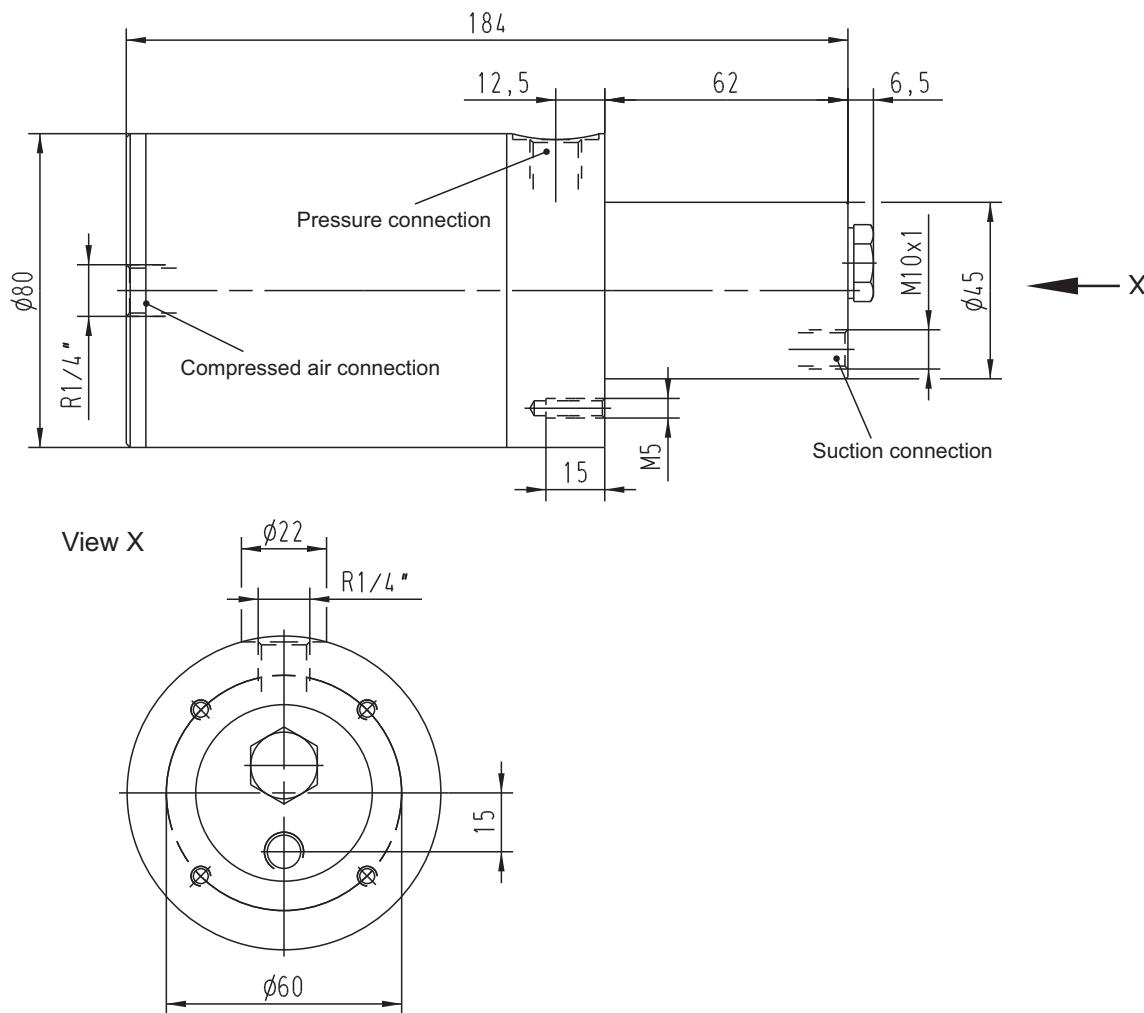

FAZ01834-00

Order key type-no. 2566

2566.03.00.000

Delivery rate	3 cm ³ /stroke	9,5 cm ³ /stroke	15 cm ³ /stroke
----------------------	---------------------------	-----------------------------	----------------------------

Code-no.	03	09	15
----------	----	----	----

Special models

03-2-17-02 State: 09.14EN

Subject to alterations!

BAIER + KÖPPEL GmbH + Co. KG
PRÄZISIONSAPPARATEFABRIKBEETHOVENSTR. 14
D-91257 PEGNITZPOSTFACH 1320
D-91253 PEGNITZTEL.: +49 9241 729-0
FAX: +49 9241 729-50WEB: www.beka-lube.de
E-MAIL: beka@beka-lube.de

1090200388

© BEKA 2014 All rights reserved!