



All oil lubrication pumps TDM-FS and TDM can also be delivered with the motor and the intermediate flange.

TDM-FSU-M	see type 2201
TDM-FS 4-M	see type 2205
TDM 2-M	see type 2211
TDM 4-M	see type 2213
TDM 8-M	see type 2215

Spare part no.

Three phase a.c. motor:	00000103000065
Intermediate flange:	F0115/01-00
Coupling with snap ring:	22120001
Coupling (motor side):	F0115/02-00
Cylinder screw DIN 912-M6x16:	090091203821
Cylinder screw DIN 912-M5x20:	090091201821

Symbol

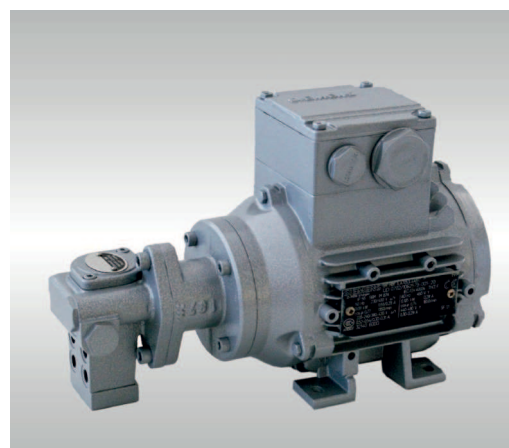

Technical data

Mode of operation:	S1
Three phase a.c. motor:	multirange tension
Power:	0,09 / 0,11 kW
Type:	B3 / B14
Size:	56
Driving speed:	1350/1650 r/min
Voltage:	230/400 V AC / 3~ at 50 Hz
Consumption:	0,5/0,29 A
Voltage:	460 V at 60 Hz
Current consumption:	0,29 A
ISO class:	F
Protection class:	IP 55
Electric connection:	M16x1,5 / M25x1,5
Flange Ø:	80 mm
(tropicalized up to 60 % air humidity and 40 °C)	

Varnishing:	standard
	hammer tone silver grey

