


## coaxial valve

type **MK 32**  
**FK 32**

|                       |  |
|-----------------------|--|
| <b>2/2 way valve</b>  | <b>direct acting</b>                         |
| <b>pressure range</b> | PN 0-100 bar                                 |
| <b>orifice</b>        | DN 32 mm                                     |
| <b>connection</b>     | thread/flange                                |
| <b>function</b>       | valve<br>normally closed<br>symbol <b>NC</b> |
|                       | valve<br>normally open<br>symbol <b>NO</b>   |



 Above stated body materials refer to the valve port connections that get in contact with the media only!

|                       |   |
|-----------------------|---|
| <b>design</b>         | pressure balanced, with spring return   |
| <b>body materials</b> | ① brass<br>③ brass, nickel plated<br>④ steel, nickel plated<br>② steel, galvanized<br>⑤ without non-ferr. metals<br>⑥ stainless steel |
| <b>valve seat</b>     | synthetic resin on metal  |
| <b>seal materials</b> | NBR<br>PTFE, FPM, CR, EPDM  |

**details needed**

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

| <b>general specifications</b> |   |  | <b>options</b>               |
|-------------------------------|---|--|------------------------------|
| <b>ports</b>                  | MK threads G 1 1/4 - G 1 1/2                                  |  | special threads              |
|                               | FK flanges PN 16 / 40 / 100                                   |  | special flanges              |
| <b>function</b>               | NC  |  | NO                           |
| <b>pressure range</b>         | bar 0-16 / 0-40 / 0-64 / 0-100                                |  |                              |
| <b>Kv value</b>               | m <sup>3</sup> /h 14,1  |  |                              |
| <b>vacuum</b>                 | leak rate < 10 <sup>-6</sup> mbar·l·s <sup>-1</sup>           |  |                              |
| <b>pressure-vacuum</b>        | P <sub>1</sub> ↔ P <sub>2</sub> upon request                  |  |                              |
| <b>back pressure</b>          | P <sub>2</sub> > P <sub>1</sub> available (max. 16 bar)       |  |                              |
| <b>media</b>                  | gaseous - liquid - highly viscous - gelatinous - contaminated |  |                              |
| <b>abrasive media damping</b> | upon request  |  |                              |
| <b>opening</b>                |   |  |                              |
| <b>closing</b>                |   |  | available                    |
| <b>flow direction</b>         | A ↔ B as marked   |  | bi-directional (max. 16 bar) |
| <b>switching cycles</b>       | 1/min 120   |  |                              |
| <b>switching time</b>         | ms opening 440 closing 250                                    |  |                              |
| <b>media temperature</b>      | °C DC: -20 to +100 40 to +160                                 |  |                              |
|                               | AC: -20 to +100 -40 to +160                                   |  |                              |
| <b>ambient temperature</b>    | °C DC: -20 to +80   |  |                              |
|                               | AC: -20 to +80  |  |                              |
| <b>limit switches</b>         | inductive / mech. (depend. on temperature)                    |  |                              |
| <b>manual override</b>        | available   |  |                              |
| <b>approvals</b>              | LR/GL/WAZ   |  |                              |
| <b>mounting</b>               | mounting brackets   |  |                              |
| <b>weight</b>                 | kg MK 13,5 FK 17,5  |  | upon request                 |
| <b>additional equipment</b>   |   |  |                              |

| <b>electrical specifications</b> |  |  | <b>options</b>                       |
|----------------------------------|--|--|--------------------------------------|
| <b>nominal voltage</b>           | U <sub>n</sub> DC 24 V                             |  | special voltage upon request         |
|                                  | U <sub>n</sub> AC 230 V 40-60 Hz                   |  | special voltage upon request         |
| <b>actuation</b>                 | DC direct-current magnet                           |  |                                      |
|                                  | AC direct-current magnet with integrated rectifier |  | above 100 °C with separate rectifier |
| <b>insulating rating</b>         | H 180°C  |  |                                      |
| <b>protection</b>                | IP65   |  |                                      |
| <b>energized duty rating</b>     | ED 100%  |  |                                      |
| <b>connection</b>                | plug acc. DIN EN 175301-803                        |  | terminal box M16x1,5                 |
|                                  | form A, 4 positions x90° /                         |  |                                      |
|                                  | wire diameter 6-8 mm                               |  |                                      |
| <b>optional</b>                  |  |  |                                      |
| <b>additional equipment</b>      |  |  |                                      |
| <b>current consumption</b>       | illuminated plug with varistor                     |  |                                      |
|                                  | N-coil DC 24 V 2,07 A                              |  |                                      |
|                                  | AC 230 V 40-60 Hz 0,28 A                           |  |                                      |
|                                  | H-coil DC 24 V 3,27 A                              |  |                                      |
|                                  | AC 230 V 40-60 Hz 0,44 A                           |  |                                      |
| <b>explosion proof</b>           |  |  |                                      |
|                                  |  |  |                                      |
|                                  |  |  |                                      |
| <b>limit switches</b>            | inductive (I)                                      |  | normally open-PNP                    |
|                                  | inductive (B)                                      |  | normally open-PNP                    |
|                                  | mechanical   |  | single pole double throw-SPDT        |


 The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

 If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard  
specifications highlighted in grey are optional

## type MK 32

function: **NC**  
closed when not energized

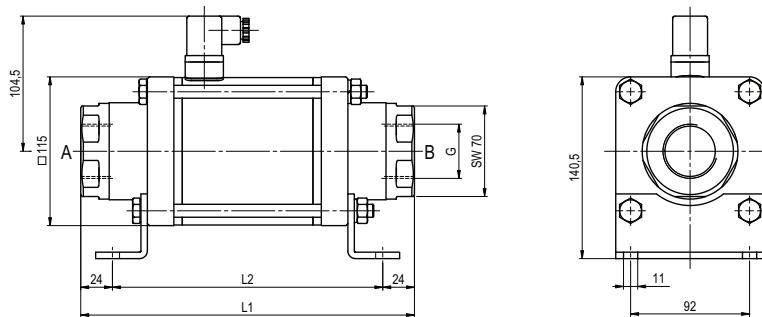

| constructive length   | L <sub>1</sub> | L <sub>2</sub> | L <sub>3</sub> |
|---|----------------|----------------|----------------|
| standard  | 258            | 210            | 324            |
| with 1/2 inductive limit switches                             | 299            | 251            | 365            |
| with manual emergency (Hd)/<br>Hd and 1/2 ind. limit switches | 299            | 251            | 365            |
| with mechanical limit switches                                | 299            | 251            | 365            |

| flanges PN | DIN       | ØD  | Øk  | Ød |
|------------|-----------|-----|-----|----|
| 16         | EN 1092-1 | 140 | 100 | 18 |
| 40         | EN 1092-1 | 140 | 100 | 18 |
| 100        | EN 1092-1 | 155 | 110 | 22 |

## type FK 32

function: **NO**  
open when not energized

