


type **MK 32 DR Ex**

function: **NC**
closed when not energized (A ► B)

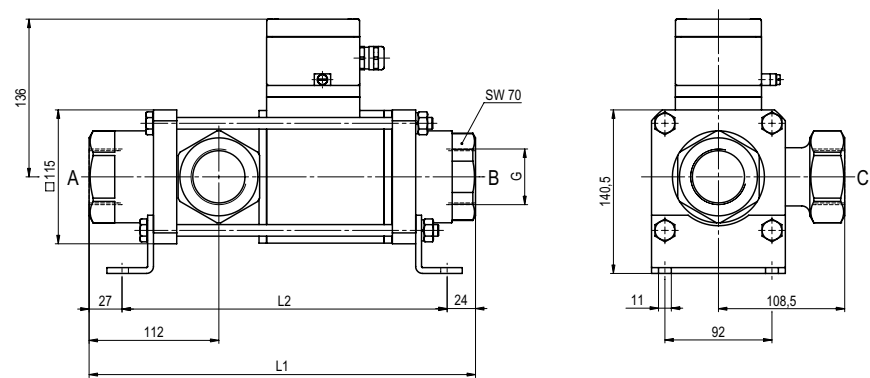

constructive length	L1	L2	L3
standard	332	281	394
with inductive limit switches	373	322	435
with manual override / inductive limit switches	373	322	435

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	140	100	18
40	EN 1092-2	140	100	18

type **FK 32 DR Ex**

function: **NO**
open when not energized (A ► B)

