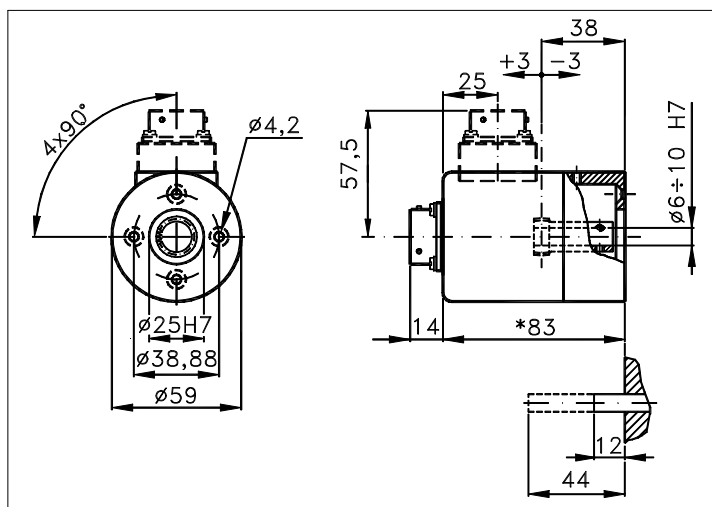


Measures without tolerance according to UNI ISO 2768-mk



* 105 for code different from Gray code.

TECHNICAL FEATURES AND POSSIBLE CONFIGURATIONS

Output codes.....: Gray, Binary, Excess, BCD, Custom Max pulses/rev.....: 2048 (11 bits) Power supply Vcc.....: 5±5%, 15±5%, 8÷24, 18÷28, 10÷30 Max consumption.....: 200÷400 mA accord. to bits (*) Light source.....: LED with >= 100000 h life Optical sensors.....: Phototransistors Max frequency.....: 50 kHz (*) Operating temperature..: 0 ÷ +70 °C (*) Storage temperature...: -30 ÷ +85 °C (*) Burn-in @ +75 °C.....: 72 h (*) Up/down commutation...: Ok Mechanical zero search: Ok Output stages.....: (-) NPN open coll. 10mA (std) (KK) NPN open coll. 70mA + PTC (KP) NPN open emitt. 70mA + PTC (B) Push-pull 70mA + PTC Pre output interface...: (-) Parallel (standard) (S) Serial SSI (A) Analogic 'current' (V) Analogic 'voltage' Electronic options....: (F) Led zero (for parallel interf.) (L) Latch (P) Parity	Connections Radial (R): CV CD4 CM5 SM5 CM3 SM3 CL (4) Axial (-) SL CH (*) - For the description of connections see 'ORDERING CODE' on page 2. Base.....: Anodized aluminium (*) Cover.....: Anodized aluminium (*) Weight.....: 520 g Shaft.....: Hollow stainless steel (*) Max. rad/axial load....: 8 Kg IP output side.....: see 'CONNECTIONS' on page 2 IP shaft side.....: std. 64 sealed 66 low torq.- Contin. max RPM...(**): 6000 3000 - Starting torque.. gcm.: 50 90 - Impact resistance.....: 50 G (11 ms) Vibration resistance...: 12 G (10 ÷ 2000 Hz) Ball bearings life....: 1,5x10⁹ revolutions (@ 1000 rev/m with load of 1/4 maximum allowed) (*) Custom options (**) Intermittent max RPM + 30% of continuous max RPM (1) Only for Gray and Excess codes (2) Only for power supply 15V or 18÷28V and resol. 102 (3) Standard for Binary and BCD codes (4) Cv (cable): up to 10 bits (1000 pulses) code BCD
---	---





POSSIBLE OPTIONS

CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	DESCRIPTION
A	High temperature	X	Custom options	G	Tropicalization
L	Low temperature			Z	Sealed bal bearing
Y	Unbreakable disk	P	Compressed air attack		



ELCIS s.r.l. Via Rosa Luxembourg 12/14 10093 COLLEGNO (TO) ITALY
Phone: +39 011 715577/78 r.a.
MAIL: ELCIS s.r.l. P.O.Box 90 10093 COLLEGNO (TO) ITALY

* <http://www.elcis.com>
* e-mail: info@elcis.com
* Fax: +39 011 712613

ELECTRONIC OUTPUT	INTERFACE	PARALLEL OPTIONS
» (-) NPN open coll.10mA(std) 	» (-) Parallel (standard) The angular value is present on the output connector in a 'parallel' form. The number of conductors is proportional to the resolution and the type of selected code. Any electronic output stage can be applied.	» (F)Led zero Designed for setting the encoder position with mechanical position. Led lights up at zero value with clockwise increasing code, at max. value with contrary clockwise.
» (KK) NPN open coll.70mA + PTC 	» (S) Serial SSI The data output (available only with Gray or Excess code) is controlled by an external clock. The angular position's value is first stored into the encoder and then transmitted outside starting from the MSB. The standard of transmission is RS422.	» (L)Latch When Latch input is set to 0 Vdc the outputs at Gray code disc level are 'frozen'; in such a way detections are carried out in stable conditions. For this reason Latch input is standard for Binary and BCD codes.
» (KP) NPN open emitt.70mA+ PTC 	» (A) Analogic 'current' » (V) Analogic 'voltage'	» (P)Parity An electronic circuit generates a signal (Parity) in such a way that the number of high level outputs is always odd; then there isn't any condition with all low level outputs. This option allows to carry out automatic checkout of the output stages.
» (B) Push-pull 70mA+PTC 	Encoder's angular position with 10 bits resolution (1024 div./rev) is converted in an analog (mA or V) quantity proportional to its value. In the standard version (360° of rotation) Iu=1÷20mA Vu=0÷10V.	»

ORDERING CODE

Possible hollow Ø (n) Ø n upon req (6) Ø 6 (8) Ø 8 (952) Ø 9, 52 (10) Ø 10 ()	(G) Gray (B) Binary (D) BCD (E) Excess (X) Upon request (-) Inter.A or V	(-) Parallel (standard) (S) Serial SSI (A) Analogic 'current' (V) Analogic 'voltage'	(CV) 1 m long cable IP65 (CM5) Conn.26 pin PT02A16-26P IP65 (SM5) Conn.26 pin PT02E16-26P IP66 (CM3) Conn.23 pin PT02A16-23P IP65 (SM3) Conn.23 pin PT02E16-23P IP66 (CL) Conn.10 pin MS310A18-1P IP65 (SL) Conn.10 pin MS310R18-1P IP66 (CH) Conn. 12 pin Em1 121 IP66 (CD4) Conn.25 pin DB25P IP64	() ()				
MODEL CODE RESOLUTION POWER SUPPLY OUTPUT ELECTR. INTERFACE CONNECT. OUTPUT								
A 359	G	256	5	-	- -	CV	R	()
OPTIONS (A) High temperature (L) Low temperature (Y) Unbreakable disk (X) Custom options () (P) Compressed air attack (G) Tropicalization (Z) Sealed bal bearing ()	[*] Cod. G, B, D: 8, 16, 32, 64, 128, 256, 512 Cod. G, B : 1024, 2048 Cod. E, B, D: 10, 100, 500, 1000 Cod. E, B, D: 180, 360, 720, 900 Cod. E, B : 1440, 1800, 2000		(-) NPN open coll.10mA(std) (KK) NPN open coll.70mA + PTC (KP) NPN open emitt.70mA+ PTC (B) Push-pull 70mA+PTC Only for parallel interface	(5) 5 V ±5% (1828)18 ÷ 28 V (15) 15 V ±5% (1030)10 ÷ 30 V (824)8 ÷ 24 V (X) Upon requ.	OPTIONS parallel interface (P)Parity (L)Latch (F)Led zero	Axial Radial	(-) (R)	COPYRIGHT by ELCIS - Collegno (TO)
Product manufactured according to ISO EN 9001, supplied with CHECKING and CONFORMITY declaration with CE mark and with TWO (2) YEARS WARRANTY starting from delivery date.								

[*] Other resolutions on customer's requirement

ELCIS company has the right to make any changing without previous notice.

data sheet IA008 E00

page: 01. 359

2/2



ELCIS s.r.l. Via Rosa Luxembourg 12/14 10093 COLLEGNO (TO) ITALY
 Telefono: +39 011 715577/78 r.a.
 Corrispondenza: ELCIS s.r.l. P.O.Box 90 10093 COLLEGNO (TO) ITALY

* http://www.elcis.com
 * e-mail: info@elcis.com
 * Fax: +39 011 712613