

FB1100 Flow Computer

The FB1100 is a cost-effective, low-power explosion-proof flow computer that measures and monitors gas flow for a single differential pressure meter run. As well as bringing a new level of measurement confidence, the FB1100 can run independently without external power, for up to one year, making it an ideal replacement for chart recorders.

The FB1100 is part of Emerson's new field mount flow computer family that delivers a convenient approach to remote oil and gas sites by addressing challenges to power, safety, measurement reliability, and accuracy.

Designed for simple configuration and ease of use, the cost effective FB1100 flow computer is focused on metering applications where control is not required.

The FB1100 provides a full audit trail, including enhanced history, alarm and event logs as well as providing a discrete output that can be used to drive an odorizer.

The FB1100 includes power options for the most remote sites and has flexible communication capabilities, including Mobile SCADA, for both remote and networked sites.

The new flow computers also come with the latest Rosemount™ multivariable measurement sensor technology, providing high accuracy differential pressure and static pressure measurement with long term stability to help improve measurement confidence and production efficiency.

Features

The FB1100 flow computer includes the following key features:

- Increased measurement confidence, reduced measurement uncertainty
- Measurement and I/O capability focused on metering applications
- Industry leading differential and static pressure measurement including 5-year stability
- High accuracy temperature measurement including curve matching via the Callendar-Van Dusen equation
- Reduced need to re-calibrate resulting in less time spent on site
- Simplified configuration and set-up with the FBxConnect™ configuration software tool
- Cost-effective alternative to chart recorders
- Flexible design with power and communication options to meet site needs
- Standard firmware supports global calculations for DP metering including orifice, cone, Venturi, nozzle, and conditioning orifice
- Simple selection of engineering units to suit local requirements

- Global Hazardous Area Approvals – Class 1 Div 1 & 2, ATEX & IEC Ex d & Ex nA
- Mobile SCADA™ allows secure local wireless access from safe area
- Ease of integration with support for Modbus, ROC, BSAP and DNP3 protocols
- Enhanced security helps prevent unauthorized access
- Enhanced alarming and historical data storage, improved audit trail
- Superior performance gives better control of your operations and maximizes profits
- API 21.1 compliant

Mobile SCADA™ with Wi-Fi®

The optional Mobile SCADA™ with Wi-Fi communications enables you to connect your laptop or tablet to the flow computer through a secure wireless connection. Once connected wirelessly, you can use FBxConnect configuration software to view process values, edit configuration parameters, and collect logs stored in the flow computer – all from within the safe area.



FB1100

Power Options

The FB1100 has the following power options:

- External DC supply
- External DC supply with internal battery back-up
- Solar panel charging internal battery, FB1100 has internal solar regulator
- Autonomous mode with internal battery powering the FB1100 for 12 months

The FB1100 running in “autonomous mode” run off a single battery for 12 months without recharging. The 12-month battery life is based on a typical remote application with local collection of history every month. This option is an ideal replacement for chart recorders. Significantly reducing measurement uncertainty and provides a complete electronic audit trail.

The solar powered option provides up to 20 days of autonomous operation without charge.

Internal battery option is not available with ATEX and IEC approvals.

Firmware

The base firmware in the FB1100 flow computer measures static pressure, differential pressure, and temperature for a single meter run. The flow computer performs gas flow calculations based on those inputs in either U.S., metric, or other user-selectable units based on the calculation type.

The firmware supports the following flow calculations:

- AGA 3 1992/2013 (volume, mass/density, and mass/relative density)
- ISO 5167 1991/1998/2003 (orifice, Venturi, and nozzle)
- Rosemount 405C Compact Orifice and 1595 Conditioning Orifice Plate
- McCrometer V-Cone® and Wafer Cone®
- NUFLON™ Cone

The firmware supports the following property calculations:

- AGA 8 1994 (Detailed, Gross 1 and Gross 2)
- NX-19 1962/MOD/VDI/VDE 2040
- ISO 12213 2009 (parts 2 and 3)
- S-GERG 1991 (Std., Alt 1, Alt 2 and Alt 3)
- GPA 2172 2009 (including saturated vapor calculation)
- ISO 6976 1995 (superior and inferior)

The firmware accepts heating value and relative density from any of the following sources:

- Fixed value
- Periodic download from SCADA
- Calculated based on gas composition

The firmware includes the following flow rates and totals:

- Indicated volume
- Corrected (standard) volume
- Mass
- Energy

The firmware supports a fallback mode when a process variable's value is questionable. The fallback options can be one of the following:

- Use last good value
- Use a fixed fallback value

Alarms and Events

The flow computer supports extensive alarming capability to enhance operational efficiency and improve the audit trail. Alarms are pre-allocated to meter runs for standard values such as pressure, temperature, and differential pressure as well as meter run flow rates. In addition to these standard alarms, the FB1100 provides a number of user alarms that you can assign to other database parameters simply by “filling in the blanks” in user alarm templates in the FBxConnect configuration tool. Storage is provided for the most recent 1000 alarms in the alarm log.

The event log stores the significant events during operation and can be configured to either store all events in a single log of 2000 events or the user can select to store the metrology/legal events in a separate log from the operational events. With the latter option the event log capacity is 1000 metrology events and 1000 operation events.

History

The FB1100 features expanded and flexible history capability to ensure measurement confidence and meet the increasing demands for secure data.

The flow computer has four standard periodic logs available providing hourly, daily, weekly, and monthly history. These logs can contain up to 35 variables including flow weighted average data, totals, and gas composition. For averaging, the FB1100 supports either flow weighted or flow dependent which can be linear or formulaic.

The FB1100 can store the following:

- | | |
|----------------|-----------|
| ▪ Hourly logs | 62 days |
| ▪ Daily logs | 12 months |
| ▪ Weekly logs | 12 months |
| ▪ Monthly logs | 60 months |

The flow computer also supports two user periodic logs, the duration or period of each is user selectable between 1 minute and 200 minutes. The first user periodic logs include 10 parameters over 4,000 periods and the second contains 20 parameters over 500 periods.

The flow computer with FBxConnect provides pre-formatted EFM reports for hours and days. The format of the reports can be .csv, .pdf or secure pdf.

In addition to the above reports, the flow computers can produce FLOWCAL-compliant. cfx files through the FBxConnect tool.

Housing

The FB1100 includes an explosion-proof and flame-proof enclosure made of die-cast aluminum that can operate in an unprotected outdoor environment. Wiring for I/O, communications, and power enters the enclosure through the four conduit fittings. The front end cap provides a viewing window for the optional LCD. The rear end cap provides access to the screw terminals. The end caps can also be fitted with wire security seals.

Hazardous Area Certifications

The FB1100 has the following Global Hazardous Area Approvals:

- North American certification for Class I Division 1 Groups C and D (explosion proof) and Class I Division 2 Groups A, B, C and D
- ATEX and IECEx certification for Exd Zone 1 (flame proof) and Exn Zone 2 hazardous locations

Configuration Software

Emerson's new FBxConnect tool is a Microsoft® Windows®-based tool that enables you to easily monitor, configure, service, and calibrate the FB1100 flow computer. Designed for ease of use, FBxConnect provides at-a-glance monitoring, quick access to commonly performed tasks, and a guided configuration process to quickly get your measurement up and running.

The wizard-driven approach simplifies configuration and ensures that you only need to enter the required data once. Whether you are an experienced engineer or a new technician, you can be confident configuration is done correctly the first time.


FBxConnect runs on a Windows PC or tablet. You connect securely to the flow computer using one of its serial ports or optionally through the Mobile SCADA wireless connection. For more information, refer to product data sheet *FBxConnect (D301789X012)*.

Multivariable Sensor

Enabled by superior sensor technology and engineered for optimal flow performance, the MVS on the FB1100 delivers unparalleled accuracy over a wide range of operating conditions and industry leading stability. Pressure inputs on the sensor are used to measure differential (up to 1000" of water) and static (absolute or gauge) pressure with an operating range of up to 3600 psi and accuracies of up to 0.075%.



Monitor Screen

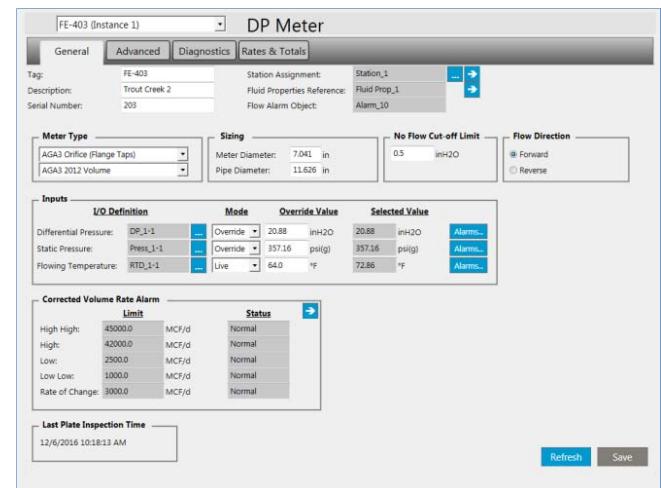

DP Meter

Temperature Input (RTD/PRT)

With industry-leading measurement accuracy the temperature measurement of the FB1100 will ensure that you minimize your measurement uncertainty in all operating conditions. The input accepts two-, three-, or four-wire connections reducing any field wiring induced errors and also supports sensor curve matching utilizing the optional Callendar Van-Dusen constants to define the unique characteristics of the RTD/PRT to further improve process temperature measurement uncertainty.

The FB1100 flow computer's superior static pressure, differential pressure (DP) and temperature measurement performance and stability ensures you meet standards and regulations so you can avoid fines, penalties, leaseholder disputes, and lost revenue. With the advanced measurement, you're getting the most accurate flow reading to ensure you meet your company and regulatory performance requirements.

Discrete Output

The FB1100 includes a single discrete output (DO) which provides the ability to control various discrete output field devices. The DO channel is a solid-state, normally open switch rated at 500 mA, enough to directly drive most odorizers or samplers. The DO channel can be software configured as a latched, toggled, momentary, timed duration output (TDO), or scaled pulse output.

Communications

The FB1100 has three serial communications ports with support for RS-232, RS-422, and/or RS-485 operation, and one port that supports optional Mobile SCADA via Wi-Fi (802.11 b/g) communications using DNP3 protocol.

- COM1 – 4-wire serial communications. Software selectable for EIA-232 (RS-232), EIA-422 (RS-422), or EIA-485 (RS-485) operation.
- COM2 – 2-wire serial communications. Software selectable for EIA-232 (RS-232) or EIA-485 (RS-485) operation.
- COM3 – 2-wire serial communications. Software selectable for EIA-232 (RS-232) or EIA-485 (RS-485) operation.
- COM4 – Mobile SCADA with Wi-Fi (802.11 b/g) communications (optional).

The FB1100 supports DNP3, Modbus slave (ASCII and RTU), BSAP, and ROC protocols on the three serial ports and DNP3 on the Mobile SCADA port.

Mounting Options

The flow computer supports either direct mount to a manifold on the pipeline or indirect mounting on a two-inch pipe or pole. A mounting bracket and bolts are available for use with a traditional flange or coplanar flange.

Security

To secure your valuable process and data, the FB1100 provides multi-level role-based access, user account authentication, and password encryption.

The system administrator can set a minimum password length (up to 20 characters) that accommodates lower case, upper case, numbers, and symbols, as well as configure a user lock-out feature that locks out invalid users after a defined number of failed login attempts.

FB1100 Flow Computer

CPU Module

Processor	The central processing unit (CPU) of the flow computer is an NPX® Kinetis® K61 series CPU with an ARM® Cortex® M4 processor.		
Memory	SRAM	8 MB, holds current states of all variables and historical archives.	
	SDRAM	128 MB	
	Flash	128 MB, holds firmware image and configuration files.	
Clock	Type	Real-time clock	
	Accuracy	0°C to -40°C	60 seconds/year
		-40°C to 80°C	110 seconds/year
Watchdog Timer		1175 milliseconds	
Diagnostics	Battery voltage monitor, external voltage monitor, SRAM battery status		

Communications

Ports	COM1	4-wire serial communications. Software selectable for RS-232, RS-422, or RS-485 operation.
	COM2	2-wire serial communications. Software selectable for RS-232 or RS-485 operation.
	COM3	2-wire serial communications. Software selectable for RS-232 or RS-485 operation.
	COM4	Mobile SCADA via Wi-Fi (optional) 802.11 b/g
Protocols	Serial ports support DNP3, Modbus slave (ASCII and RTU), BSAP, and ROC Wi-Fi supports DNP3 DNP3 includes level 3 protocol subset	

Inputs/Outputs

The base FB1100 includes the following I/O:

- 1 multivariable sensor, measures differential pressure and static pressure
- 1 process temperature input (PRT/RTD)
- 1 discrete output (DO)

The I/O of the FB1100 is focused on a standard metering application with a DO that is typically used to drive an odorizer.

Multivariable Sensor

The standard Rosemount™ MultiVariable™ sensor has a stainless steel coplanar flange, a stainless steel (316L) diaphragm, and silicone fill fluid. Optional versions include:

- A Hastelloy® C-276 sensor diaphragm, a Hastelloy C-276 coplanar flange, with either NACE MRO175/ISO 15156 or MRO103 certification
- Stainless steel traditional flange, a stainless steel diaphragm, and silicon fill fluid.

Differential Pressure Input	DP Range 1	-25 to 25 Inches H ₂ O (-62.16 to 62.16 mbar)
	Reference Accuracy	± 0.1% span; For spans less than 5:1, ± (0.025+0.015 [USL/Span]) % span
	Stability	±0.2% USL for 1 year

Ambient Temperature Effect per 50°F (28°C)	from 1:1 to 30:1	$\pm (0.2\% \text{ USL} + 0.25\% \text{ span})$
	from 30:1 to 50:1	$\pm (0.24\% \text{ USL} + 0.15\% \text{ span})$
Static Pressure Effects	Zero Error	$\pm 0.25\% \text{ USL per 1000 psi (69 bar)}$
	Span Error	$\pm 0.4\% \text{ USL per 1000 psi (69 bar)}$
Over Pressure Limit	SP Range 3	2000 psi (137.89 bar)
Burst Pressure Limit		10,000 psi (689.47 bar)
Notes:		
<ul style="list-style-type: none"> ▪ 25-inch sensor is only available with static pressure SP Range 3, maximum pressure limited to 2000 psi. ▪ 25-inch sensor is only available with stainless steel sensor and coplanar flange. 		
DP Range 2: Standard	0 to 250 Inches H ₂ O (623 mbar)	
Reference Accuracy	$\pm 0.1\% \text{ span};$ For spans less than 10:1, $\pm (0.01 \text{ [USL/Span]}) \% \text{ span}$	
Stability	$\pm 0.1\% \text{ USL for 1 year}$	
Ambient Temperature Effect per 50°F (28°C)	from 1:1 to 30:1	$\pm (0.15\% \text{ USL})$
	from 30:1 to 50:1	$\pm (0.20\% \text{ USL})$
Static Pressure Effects	Zero Error	$\pm 0.1\% \text{ USL per 1000 psi (69 bar)}$ For Static Pressures above 2000 psi: $\pm [0.2 + 0.0001 * (Ps - 2000)] \% / 1000 \text{ psi}$
	Span Error	$\pm 0.2\% \text{ USL per 1000 psi (69 bar)}$
Over Pressure Limit	SP Range 1	1600 psi (110.32 bar)
	SP Range 2	3626 psi (250.00 bar)
	SP Range 3	3626 psi (250.00 bar)
Burst Pressure Limit		10,000 psi (689.47 bar)
Note: 0.1% Accuracy is not available on traditional flange.		
DP Range 2: Enhanced	0 to 250 Inches H ₂ O (623 mbar)	
Reference Accuracy	$\pm 0.075\% \text{ span};$ For spans less than 10:1, $\pm (0.025 + 0.005 \text{ [USL/Span]}) \% \text{ span}$	
Stability	$\pm 0.125\% \text{ USL for 5 years};$ For $\pm 50 \text{ }^{\circ}\text{F}$ ($28 \text{ }^{\circ}\text{C}$) temperature changes, up to 1000 psi (68.9 bar) line pressure	

Ambient Temperature Effect per 50°F (28°C)	$\pm (0.0175\% \text{ USL} + 0.1\% \text{ span})$ from 1:1 to 5:1, $\pm (0.035\% \text{ USL} + 0.125\% \text{ span})$ from 5:1 to 100:1	
Static Pressure Effects	Zero Error	$\pm 0.05\% \text{ USL}$ per 1000 psi (69 bar) For Static Pressures above 2000 psi: $\pm [0.1 + 0.0001 * (\text{Ps} - 2000)] \% / 1000 \text{ psi}$
	Span Error	$\pm 0.2\% \text{ USL}$ per 1000 psi (69 bar)
Over Pressure Limit	SP Range 1	1600 psi (110.32 bar)
	SP Range 2	3626 psi (250.00 bar)
	SP Range 3	3626 psi (250.00 bar)
Burst Pressure Limit	10,000 psi (689.47 bar)	
DP Range 3: Standard	0 to 1000 Inches H ₂ O (2.5 bar) DP	
Reference Accuracy	± 0.1% span;	
	For spans less than 10:1, $\pm (0.01 [\text{USL}/\text{Span}]) \% \text{ span}$	
Stability	$\pm 0.1\% \text{ USL}$ for 1 year	
Ambient Temperature Effect per 50°F (28°C)	from 1:1 to 30:1	$\pm (0.15\% \text{ USL})$
	from 30:1 to 50:1	$\pm (0.20\% \text{ USL})$
Static Pressure Effects	Zero Error	$\pm 0.1\% \text{ USL}$ per 1000 psi (69 bar) For Static Pressures above 2000 psi: $\pm [0.2 + 0.0001 * (\text{Ps} - 2000)] \% / 1000 \text{ psi}$
	Span Error	$\pm 0.2\% \text{ USL}$ per 1000 psi (69 bar)
Over Pressure Limit	SP Range 2	3626 psi (250.00 bar)
	SP Range 3	3626 psi (250.00 bar)
Burst Pressure Limit	10,000 psi (689.47 bar)	

Notes:

- 0.1% Accuracy is **not** available on traditional flange.
- 1000" DP range with 0.1% accuracy **only** available with stainless steel sensor and coplanar flange.
- 1000" DP range is **not** available with 300 psi static pressure (SP Range 1).

DP Range 3: Enhanced	0 to 1000 Inches H ₂ O (2.5 bar) DP		
	Reference Accuracy	± 0.075% span; For spans less than 10:1, ± (0.025 + 0.005 [USL/Span]) % span	
	Stability	± 0.125% USL for 5 years; For ±50 °F (28 °C) temperature changes, up to 1000 psi (68.9 bar) line pressure	
	Ambient Temperature Effect per 50°F (28°C)	± (0.0175% USL + 0.1% span) from 1:1 to 5:1, ± (0.035% USL + 0.125% span) from 5:1 to 100:1	
	Static Pressure Effects	Zero Error ± 0.05% USL per 1000 psi (69 bar) For Static Pressures above 2000 psi: ± [0.1 + 0.0001 * (Ps - 2000)] % /1000 psi	
		Span Error ± 0.2% USL per 1000 psi (69 bar)	
	Over Pressure Limit	SP Range 2 3626 psi (250.00 bar) SP Range 3 3626 psi (250.00 bar)	
Burst Pressure Limit		10,000 psi (689.47 bar)	
Note: 1000" DP range is not available with 300 psi static pressure (SP Range 1).			
Static Pressure Input	SP Range 1	Gauge	-14.2 to 300 psig (-0.98 to 20.68 bar)
		Absolute	0.5 to 300 psia (0.03 to 20.68 bar)
		Reference Accuracy	Standard ± 0.1% span; For spans less than 5:1, ± [0.017 (USL/Span)] % span
			Enhanced ± 0.075% span; For spans less than 5:1, ± [0.013(USL/Span)] % span
		Gauge	-14.2 to 1500 psig (-0.98 to 103.42 bar)
		Absolute	0.5 to 1500 psia (0.03 to 103.42 bar)
		Reference Accuracy	Standard ± 0.1% span; For spans less than 5:1, ± [0.017 (USL/Span)] % span
SP Range 2			Enhanced ± 0.075% span; For spans less than 5:1, ± [0.013(USL/Span)] % span
SP Range 3	Gauge	-14.2 to 3626 psig (-0.98 to 250.00 bar)	
	Absolute	0.5 to 3626 psia (0.03 to 250.00 bar)	
	Note: When used with 25" H ₂ O DP sensor, maximum static pressure is 2000 psi.		

Reference Accuracy	Standard	± 0.1% span; For spans less than 5:1, ± [0.017 (USL/Span)] % span
	Enhanced	± 0.075% span; For spans less than 5:1, ±[0.013(USL/Span)] % span
Stability	Standard Accuracy	±0.1% USL for 1 year
	Enhanced Accuracy	±0.125% USL for 5 years
Ambient Temperature Effects per 28°C (50°F)	Standard Accuracy	± (0.175% USL) from 1:1 to 10:1, ± (0.225% USL) from 10:1 to 25:1
	Enhanced Accuracy	± (0.050% USL + 0.125% span) from 1:1 to 10:1, ± (0.060% USL + 0.175% span) from 10:1 to 25:1

Inputs

Temperature Input (RTD/PRT)	Type	2-, 3-, or 4-wire (software selectable)
	Measuring Range	-200 to +850°C (-328 to +1562 °F)
	Reference Accuracy	+/- 0.1°C from -60 to 200°C (±0.18 °F from -76 to +392 °F) +/- 0.07°C from -30 to 60°C (±0.126 °F from -22 to +140°F)
Ambient Temperature Effect	-30 to 60°C	+/- 0.017 °C per 10 °C (+/- 0.03 °F per 18 °F) from the calibration temperature
	-60 to 200°C	+/- 0.034 °C per 10 °C (+/- 0.06 °F per 18 °F) from the calibration temperature
Calculation Type	User selectable between	Callendar–Van Dusen
		IEC 751/DIN 43760 (α 0.00385/°C)
		IEC (α 0.003920/°C)
Resolution	24 bits	
Scan Rate	1 second	
Voltage Input Impedance	Greater than 3 MΩ DC	
Excitation Current	205 µA	
Surge Suppression	36 Vdc	
Common Mode Rejection	100 dB at DC	
Normal Mode Rejection	100 dB at 50/60 Hz	

Outputs				
Discrete Output	Type	Open drain		
	Current Mode	500 mA maximum		
	Operating Voltage Range	30 Vdc maximum		
	Frequency	50 Hz maximum		
	Output Type	Latched, momentary, toggle, TDO, or scaled pulse		
	Surge Suppression	30 Vdc		
	Fault Mode	User-entered default value or last good value		
Power				
External DC Power Supply	5.7 Vdc to 30 Vdc external supply (Max power at 10 watts)			
Optional Rechargeable Lead Acid Battery	Internal mounted 2.9 Ah 6.0 Vdc battery Battery Temperature Rating -25°C to 60°C (-13°F to 140°F) The battery can power the unit for up to 20 days without any solar charging depending on display and communications usage, and can be charged by a 6-watt solar panel or from a DC supply for backup Note: This option is available with Class 1 Div1 and Class 1 Div 2 approvals only.			
Lithium Battery Pack	10 Vdc, 41 Ah Required when using autonomous measurement mode Allows operation for one year in autonomous measurement mode with monthly data collection and 30 minutes per month of display use Note: This option is available only with Class 1 Div1 and Class 1 Div 2 approvals. Lithium battery shipping restrictions apply.			
Solar Panel	If ordered with the rechargeable battery option, the FB1100 includes an integral solar regulator Can be supplied with an optional 6 watt 6 Vdc solar power Note: This option is available only with Class 1 Div1 and Class 1 Div 2 approvals.			
SRAM Battery	Lithium coin cell type BR2335 Life expectancy of 5–7 years with power; 10,000 hours without power			
Power Modes				
To keep power consumption to a minimum, especially for remote sites, the FB1100 can run in two different power modes, low and standard. The FB1100 normally runs in low power mode for standard metering applications.				
When running in low power mode, the radio power control function is used to switch to standard power mode and enable the serial ports. During communication periods, the unit uses the standard power mode and then automatically reverts to low power mode when the communication period is over.				
The local display and Mobile SCADA with Wi-Fi can be configured to switch off after a period of inactivity (configurable between 1 and 60 minutes) or be permanently left on.				
When running in low power mode, if you need to use more than the default number of data points for logging, consult the <i>Emerson FB1100 Flow Computer Instruction Manual</i> (D301752X012) to determine the possible impact on power consumption.				
The figures below are typical power values in mW measured at room temperature.				
Low Power Mode	Base unit with integral multivariable DP and pressure sensor and temperature measurement	36 mW @ 6Vdc		
Additional Load Options	Display and Backlight active	296 mW @ 6Vdc		
	Mobile SCADA	315 mW @ 6Vdc		

		Mobile SCADA and Display active	340 mW @ 6Vdc	
		DO active (1 Hz, 50:50 duty cycle, no load)	10 mW @ 6Vdc	
Standard Power Mode	Base unit with integral multivariable DP and pressure sensor and temperature measurement	209 mW @ 6Vdc	224 mW @ 12Vdc	265 mW @ 24Vdc
	Additional Load Options	Display and Backlight active	162 mW @ 6Vdc	168 mW @ 12Vdc
		Mobile SCADA	189 mW @ 6Vdc	185 mW @ 12Vdc
		Mobile SCADA and Display active	204 mW @ 6Vdc	207 mW @ 12Vdc
		DO active (1 Hz, 50:50 duty cycle, no load)	21 mW @ 6Vdc	23 mW @ 12Vdc
				20 mW @ 24Vdc
Physical				
Construction	Die-cast aluminum, painted, with wire sealable end caps			
Ingress Protection	IEC 60529 IP66 & NEMA 4X			
Dimensions	11.715 in. H by 6.0 in. W by 9.426 in. D (297.7 mm H by 152.4 mm W by 239.4 mm D)			
Mounting	2 in. pipe or direct manifold			
Wiring	Size 12 to 28 American Wire Gauge (AWG) (0.3 to 2.0 mm diameter)			
Wiring Access	4 conduit entry points 3/4 in. NPT (standard) M20 (optional)			
Weight	FB1100 with MVS coplanar flange sensor: 6.75 Kg (14.9 lb) Internal battery: 0.73 kb (1.6 lb)			
Display	Optional backlit liquid crystal display			
HMI	20 characters per line; 4 lines in display.			
Environmental				
Operating Temperature	-40 °C to +80 °C (-40°F to +176 °F) (see ambient temps in Approvals section) Note: Please check Approvals section for any restrictions. The display exhibits increased response time and decreased contrast at temperatures below -30°C (-22 °F).			
Storage Temperature	-40 °C to +85 °C (-40°F to +185 °F)			
Operating Humidity	5 to 95%, non-condensing			
Conformal Coating	All boards are conformal coated and comply with ANSI/ISA S71.04 Class G3 environments			
Electro Magnetic Compatibility	The following EMC Emissions and Immunity are evaluated per EMC directive 2014/30/EU. Harmonized standards used: EN 61326-2-3-2013 Immunity EN 61326-1-2013 Emissions			

Immunity	EN 61000-4-2 (Electro Static Discharge) EN 61000-4-3 (Radiated Immunity) * EN 61000-4-4 (Fast Transients) EN 61000-4-5 (Surges) EN 61000-4-6 (Conducted RF) EN 61000-4-8 (Power Frequency Magnetic Field) EN 61000-4-17 (Voltage Ripple) EN 61000-4-29 (Voltage Dips and Interrupts)
	* Meets CE compliance 10V/m industrial requirements (deviations < 1% span for RTD and Pressure readings in addition to original specification)
Radiated Emissions	EN 550022 Class A
Vibration	2g over 10 to 150 Hz 1g over 150 to 200 Hz

Approvals

Product Markings for Hazardous Locations	UL	Class 1, Div 1 Groups C, D, Temperature Code, T6 Class 1, Div 2 Groups A, B, C, D, Temperature Code T4
		Ambient Temperature Standard -25 to +80 °C (-13 to +176 °F) With Integral Rechargeable Lead Acid Battery -25 to +60 °C (-13 to +140 °F) With Integral Lithium Battery -25 to +80 °C (-13 to +176 °F)
		Evaluated per Approval Standards Per Class 1, Div 1: UL 1203 5 th Ed. UL/IEC 61010-1 Part 1 3 rd Ed. CSA C22.2 No. 30-M1986 CSA C22.2 No. 61010-1-12 Part 1 3 rd Ed. Per Class 1, Div 2: ANSI/ISA 12.12.01-2015 CSA C22.2 No. 213-15 CSA C22.2 NO. 61010-1-12 Part 1 3 rd Ed UL61010-1 Part 1 3 rd Ed
	UL	ATEX Cert: DEMKO 15 ATEX 1349X IECEx Cert: IECEx UL 15.0024X Ex d IIB T4 Gb, -40°C to +80°C
		Ambient Temperature -40°C to +80 °C (-40 to +176 °F)  
		Evaluated per Approval Standards: Directive 2014/34/EU EN 60079-0:2012+A11:2013 EN 60079-1:2007
		ATEX Cert: DEMKO 15 ATEX 1367X IECEx Cert: UL 15.0044X Ex nA IIC T4 Gc

Ambient Temperature	-25°C to +80 °C (-13 to +176 °F)
	
Evaluated per Approval Standards:	Directive 2014/34/EU EN 60079-0:2012+A11:2013 EN 60079-15:2010 EN 60079-1:2007
Note: ATEX and IECEx approval requires the use of an external DC power supply.	

Miscellaneous Approvals

RoHS (China)



For customer service and technical support,
visit www.EmersonProcess.com/Remote/Support.

**Global Headquarters,
North America, and Latin America:**

Emerson Automation Solutions
Remote Automation Solutions
6005 Rogerdale Road
Houston, TX 77072 U.S.A.
T +1 281 879 2699 | F +1 281 988 4445
www.EmersonProcess.com/Remote

Europe:

Emerson Automation Solutions
Remote Automation Solutions
Unit 8, Waterfront Business Park
Dudley Road, Brierley Hill
Dudley UK DY5 1LX
T +44 1384 487200 | F +44 1384 487258

Middle East/Africa:

Emerson Automation Solutions
Remote Automation Solutions
Emerson FZE
P.O. Box 17033
Jebel Ali Free Zone – South 2
Dubai U.A.E.
T +971 4 8118100 | F +971 4 8865465

Asia-Pacific:

Emerson Automation Solutions
Remote Automation Solutions
1 Pandan Crescent
Singapore 128461
T +65 6777 8211 | F +65 6777 0947

© 2017 Remote Automation Solutions, a business unit of Emerson Automation Solutions. All rights reserved.

This publication is for informational purposes only. While every effort has been made to ensure accuracy, this publication shall not be read to include any warranty or guarantee, express or implied, including as regards the products or services described or their use or applicability. Remote Automation Solutions (RAS) reserves the right to modify or improve the designs or specifications of its products at any time without notice. All sales are governed by RAS terms and conditions which are available upon request. RAS accepts no responsibility for proper selection, use or maintenance of any product, which remains solely with the purchaser and/or end-user.