

Bearing Cup Pullers and Bearing Separators

▼ Shown: BHP380



Bearing Cup Puller

- Made of high-strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals.

BHP Series



Capacity:

7, 12, 18 and 25 tons

Maximum Reach:

4.53 - 5.91 inches

Spread Range:

5.71 - 9.84 inches

Maximum Operating Pressure:

5,000 psi

▼ SELECTION CHART

Capacity *	7 tons	12 tons	18 tons	25 tons
30 Bearing Cup Puller				
Model Number ►	BHP180	BHP280	BHP380	BHP580
Spread (inches)	Max.	5.71	6.30	9.45
	Min.	1.57	1.26	2.36
Reach (inches)	Max.	4.53	5.51	5.91
Center Screw	Thread	3/4"- 16 UNF	1"- 8 UNC	1 1/4"- 7 UNC
				1 5/8"- 5.5 UNS

* Puller capacity, not attachment capacity. See warning on this page.



WARNING

Do not exceed 50% of the rated puller capacity when using a double crosshead (2 grip arms)


or when using puller legs in combination with bearing puller attachments.

▼ Shown: BHP382




Bearing Separator

- Made of high-strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts.

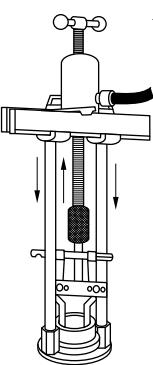

► Bearing Cup Puller shown with Crosshead Puller Attachment.

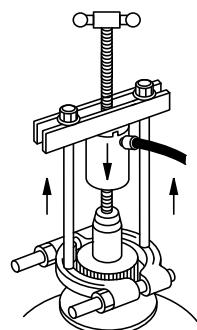

Bearing Separator shown with Crosshead Puller Attachment. ►



Bearing Separator

Bearing Separator has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Separator can be used with the Cross Bearing Puller or the Grip Puller.

▼ SELECTION CHART

Capacity *	7 tons	12 tons	18 tons	25 tons
40 Bearing Puller				
Model Number ►	BHP181	BHP282	BHP382	BHP582
Spread (inches)	Max.	4.33	5.28	9.84
	Min.	0.39	0.47	0.67
Width (inches)		4.33	6.10	10.24
Thread	5/8"-18 UNF	3/4"- 18 UNF	1"- 14 UNS	1 1/4"- 12 UNS

* Bearing Separator rated at 50% of puller capacity. See warning on this page.