

Hydraulic Machine Lifts

▼ SOH10-6



SOH Series

Lifting Capacity:

8.5 - 20 tons

Stroke:

5.39 - 6.18 inches

Toe Clearance:

0.79 - 1.18 inches

Maximum Operating Pressure:

10,000 psi



RSM-Series, Low-Height Cylinders

Low-height, single-acting, spring-return cylinders are ideal for space restricted applications.

Page:  32




Load Skates

In combination with the Enerpac Machine Lifts we recommend Load Skates for moving heavy loads.

Page:  188

▼ Limited access under this machine makes the Enerpac hydraulic machine lift the perfect solution.

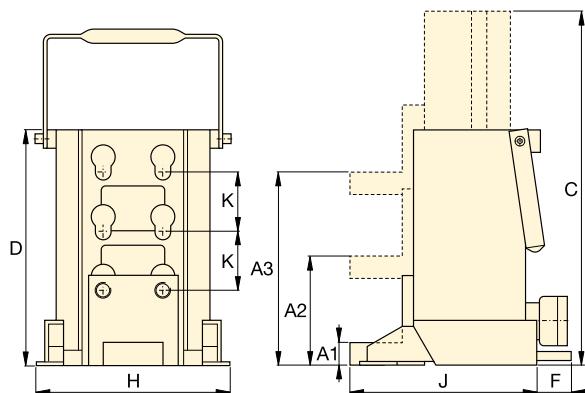

Capacity (tons)	Toe Clearance (in)			Stroke (in)	Model Number	Oil Capacity (in³)	Dimensions (in)						Weight (lbs)
	Minimum A1	Central A2	Maximum A3				Total Ext. Height C	Total Body Height D	F	H	J	K	
8.5	0.79	3.74	6.69	5.39	SOH10-6	13.7	17.00	11.61	—	7.48	8.46	2.95	59.2
20	1.18	4.33	7.48	6.18	SOH23-6	32.0	18.58	12.40	2.56	10.24	9.84	3.15	99.2