

DC-Micromotors

Graphite Commutation

19 mNm
24 W

Series 2342 ... CR

Values at 22°C and nominal voltage		2342 S	006 CR	012 CR	018 CR	024 CR	036 CR	048 CR		
1	Nominal voltage	U_N	6	12	18	24	36	48	V	
2	Terminal resistance	R	0,4	1,9	4,1	7,1	15,9	31,2	Ω	
3	Efficiency, max.	η_{max}	81	80	81	81	81	81	%	
4	No-load speed	n_0	9 000	8 100	8 000	8 500	8 100	8 000	min ⁻¹	
5	No-load current, typ. (with shaft ø 3 mm)	I_0	0,17	0,075	0,048	0,038	0,024	0,017	A	
6	Stall torque	M_H	87,2	80	86,5	85,4	91,4	84,4	mNm	
7	Friction torque	M_R	0,98	1	0,99	0,99	0,99	0,95	mNm	
8	Speed constant	k_n	1 650	713	462	366	231	170	min ⁻¹ /V	
9	Back-EMF constant	k_E	0,604	1,4	2,16	2,73	4,34	5,87	mV/min ⁻¹	
10	Torque constant	k_M	5,77	13,4	20,7	26,1	41,4	56,1	mNm/A	
11	Current constant	k_I	0,173	0,075	0,048	0,038	0,024	0,018	A/mNm	
12	Slope of n-M curve	$\Delta n / \Delta M$	103	101	92,5	99,5	88,6	94,8	min ⁻¹ /mNm	
13	Rotor inductance	L	13,5	65	150	265	590	1 050	μ H	
14	Mechanical time constant	τ_m	6	6	6	6	6	6	ms	
15	Rotor inertia	J	5,6	5,7	6,2	5,8	6,5	6	gcm ²	
16	Angular acceleration	α_{max}	160	140	140	150	140	140	·10 ³ rad/s ²	
17	Thermal resistance	R_{th1} / R_{th2}	3 / 15						K/W	
18	Thermal time constant	τ_{w1} / τ_{w2}	6,5 / 490						s	
19	Operating temperature range:									
	– motor		-30 ... +100						°C	
	– winding, max. permissible		+125						°C	
20	Shaft bearings		ball bearings, preloaded							
21	Shaft load max.:									
	– with shaft diameter		3						mm	
	– radial at 3 000 min ⁻¹ (3 mm from bearing)		20						N	
	– axial at 3 000 min ⁻¹		2						N	
	– axial at standstill		20						N	
22	Shaft play:									
	– radial		≤	0,015					mm	
	– axial		=	0					mm	
23	Housing material		steel, black coated							
24	Mass		88						g	
25	Direction of rotation		clockwise, viewed from the front face							
26	Speed up to		n_{max}	11 000					min ⁻¹	
27	Number of pole pairs		1							
28	Magnet material		NdFeB							
Rated values for continuous operation										
29	Rated torque		M_N	14	17	18	17	19	18	mNm
30	Rated current (thermal limit)		I_N	2,9	1,5	1	0,78	0,53	0,38	A
31	Rated speed		n_N	7 140	6 090	6 040	6 470	6 160	5 910	min ⁻¹


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 25%.

Note:


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

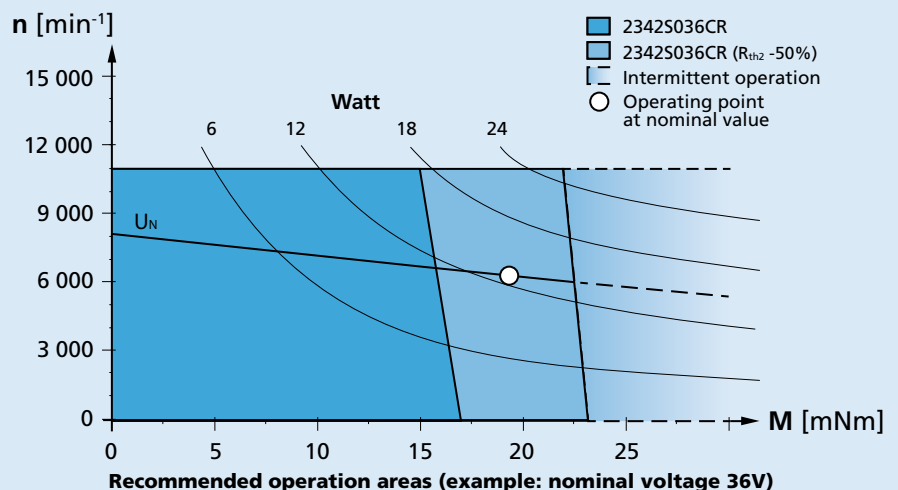

Dimensional drawing

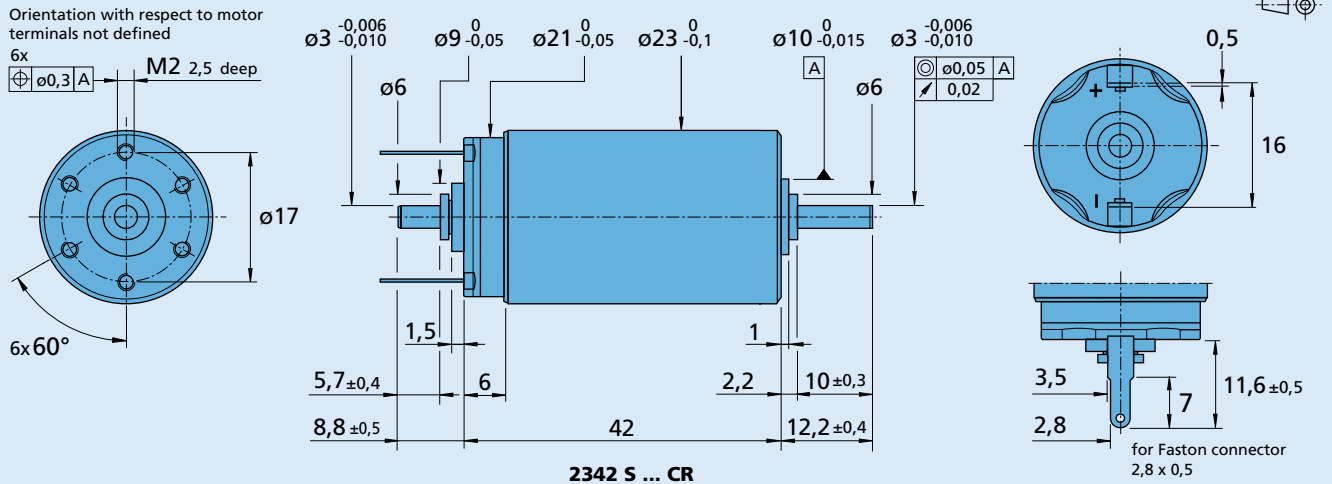

Options

Example product designation: **2342S012CR-158**

[illegible]

Product combination
1. Product A and Product B: This combination is highly popular among customers, leading to a significant increase in sales volume. 2. Product C and Product D: This combination is also popular, but it requires more inventory space and is more expensive to produce. 3. Product E and Product F: This combination is less popular, but it has a high profit margin and is easy to produce. 4. Product G and Product H: This combination is the least popular, but it is the most profitable and easiest to produce.

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
22F 22GPT 22/7 23/1 26A 26/1 26/1R 30/1 30/1 S	IE3-1024 IE3-1024 L IERS3-500 IERS3-500 L IER3-10000 IER3-10000 L	SC 2402 P SC 2804 S SC 5004 P SC 5008 S MCDC 3002 P MCDC 3002 S MCDC 3003 P MCDC 3006 S MC 5004 P MC 5005 S	MBZ To view our large range of accessory parts, please refer to the “Accessories” chapter.