

Brushless DC-Servomotors

4 Pole Technology

96 mNm

62 W

Series 3268 ... BX4

Values at 22°C and nominal voltage		3268 G	018 BX4	024 BX4	030 BX4	036 BX4	042 BX4	048 BX4		
1	Nominal voltage	U_N	18	24	30	36	42	48	V	
2	Terminal resistance, phase-phase	R	0,92	1,47	2,08	3,23	4,83	6,06	Ω	
3	Efficiency, max.	η_{max}	80	81	80	80	80	79	%	
4	No-load speed	n_0	5 100	5 500	5 700	5 500	5 300	5 500	min ⁻¹	
5	No-load current, typ. (with shaft ø 5 mm)	I_0	0,22	0,183	0,162	0,124	0,101	0,093	A	
6	Stall torque	M_H	670	705	742	716	670	678	mNm	
7	Friction torque, static	C_0	1,6	1,6	1,6	1,6	1,6	1,6	mNm	
8	Friction torque, dynamic	C_V	1,1·10 ⁻³	1,1·10 ⁻³	1,1·10 ⁻³	1,1·10 ⁻³	1,1·10 ⁻³	1,1·10 ⁻³	mNm/min ⁻¹	
9	Speed constant	k_n	278	220	185	148	124	111	min ⁻¹ /V	
10	Back-EMF constant	k_E	3,595	4,534	5,392	6,741	8,088	8,987	mV/min ⁻¹	
11	Torque constant	k_M	34,3	43,5	51,5	64,4	77,2	85,8	mNm/A	
12	Current constant	k_I	0,029	0,023	0,019	0,015	0,013	0,012	A/mNm	
13	Slope of n-M curve	$\Delta n / \Delta M$	7,45	7,5	7,48	7,44	7,73	7,85	min ⁻¹ /mNm	
14	Terminal inductance, phase-phase	L	67,6	110	152	238	342	423	μ H	
15	Mechanical time constant	τ_m	4,9	4,9	4,9	4,9	5,1	5,2	ms	
16	Rotor inertia	J	63	63	63	63	63	63	gcm ²	
17	Angular acceleration	α_{max}	106	112	118	114	106	108	·10 ³ rad/s ²	
18	Thermal resistance	R_{th1} / R_{th2}	1,7 / 8,8						K/W	
19	Thermal time constant	τ_{w1} / τ_{w2}	16 / 1 080						s	
20	Operating temperature range:									
	– motor		-40 ... +100						°C	
	– winding, max. permissible		+125						°C	
21	Shaft bearings		ball bearings, preloaded							
22	Shaft load max.:									
	– with shaft diameter		5						mm	
	– radial at 3 000 min ⁻¹ (5 mm from mounting flange)		50						N	
	– axial at 3 000 min ⁻¹ (push / pull)		5						N	
	– axial at standstill (push / pull)		50						N	
23	Shaft play:									
	– radial		≤	0,015					mm	
	– axial		=	0					mm	
24	Housing material		stainless steel							
25	Mass		290						g	
26	Direction of rotation		electronically reversible							
27	Speed up to		n_{max}	12 000					min ⁻¹	
28	Number of pole pairs		2							
29	Hall sensors		digital							
30	Magnet material		NdFeB							
Rated values for continuous operation										
31	Rated torque		M_N	74,5	72	69,8	71,9	71,7	70	mNm
32	Rated current (thermal limit)		I_N	2,63	2	1,66	1,36	1,13	1	A
33	Rated speed		n_N	4 550	4 890	5 210	4 950	4 750	4 920	min ⁻¹


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 25%.

Note:


The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.

The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

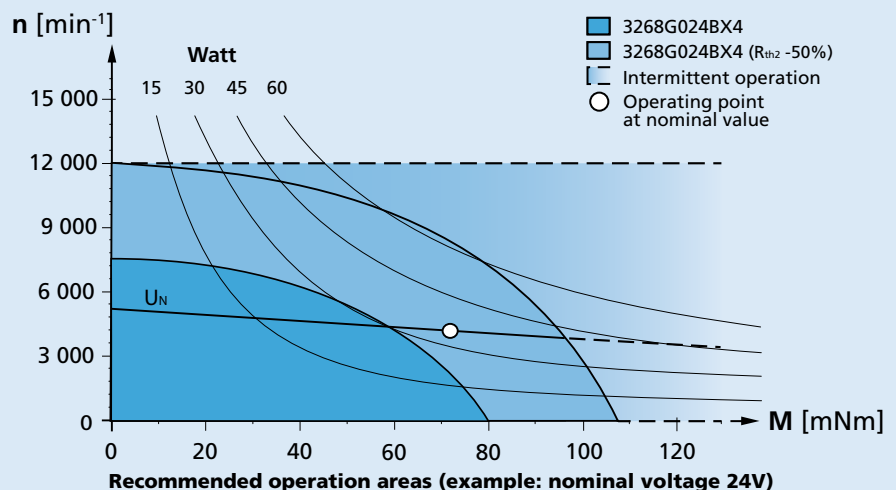

Dimensional drawing

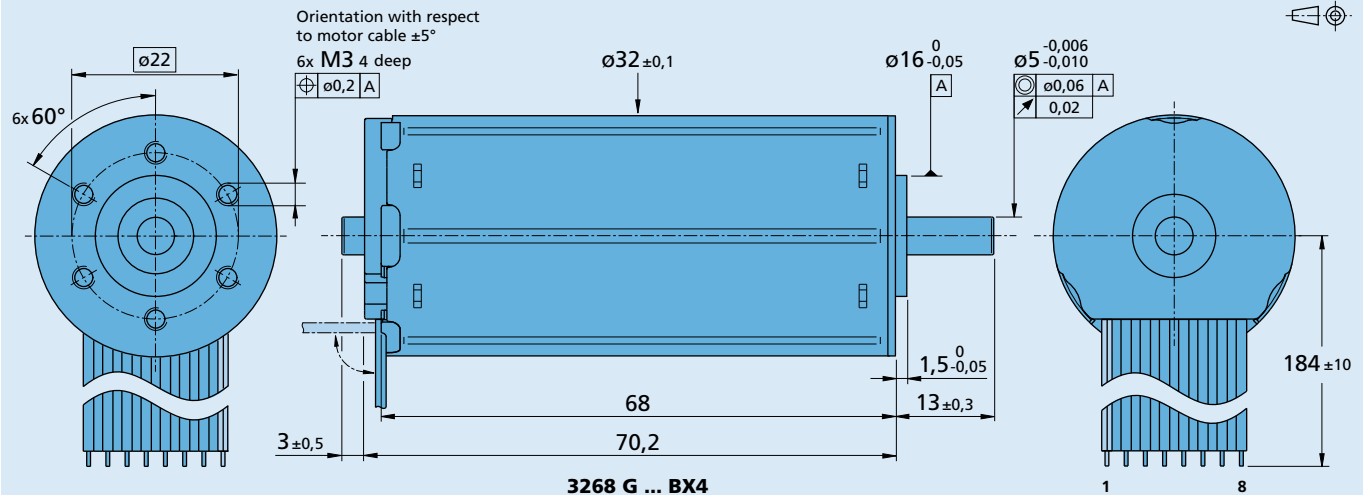

Option, cable and connection information

Example product designation: **3268G024BX4-3692**

Option	Type	Description	Connection standard	Option: 4935/4747	
			No. Function	Function	Colour
3830	Connector 	AWG 26 / PVC ribbon cable with connector MOLEX Microfit 3.0, 43025-0800, recommended mating connector 43020-0800	1 Phase C 2 Phase B 3 Phase A 4 GND 5 UDD (+5V) 6 Hall sensor C 7 Hall sensor B 8 Hall sensor A	Phase C Phase B Phase A GND UDD (+5V) Hall sensor C Hall sensor B Hall sensor A	yellow orange brown black red grey blue green
4935	Single wires	Motor with single wires (PTFE), length 184 mm, AWG22	Standard cable Insulation: PVC 8 conductors, AWG 24 pitch 2,54 mm, wires tinned		
X4935	Single wires	Motor with single wires (PTFE), length 300 mm, AWG22			
Y4935	Single wires	Motor with single wires (PTFE), length 600 mm, AWG22			
4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 184 mm, AWG22			
X4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 300 mm, AWG22			
Y4747	Temperature range	Up to 150°C, winding max. 150°C, with single wires (PTFE), length 600 mm, AWG22			
Y158	Shaft end	Motor without second shaft end			
3692	Controller combination	Analog Hall sensors for combination with Motion Controller MCBL			

Product combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics	Cables / Accessories
32A 32ALN 32GPT 32/3 32/3R 38A 38/1 38/1 S 38/2 38/2 S 42GPT	IE3-1024 IE3-1024 L IER3-10000 IER3-10000 L AES-4096 AES-4096 L	SC 2804 S SC 5004 P SC 5008 S MCBL 3003 P MCBL 3006 S MCBL 3003 P AES MCBL 3006 S AES MC 5004 P MC 5004 P STO MC 5005 S MC 5010 S	MBZ To view our large range of accessory parts, please refer to the "Accessories" chapter.