

AGM2E 90 S 6

IE2

GAMAK

3-Phase 230/400 V 50 Hz


Duty Type : S1

Degree of protection : IP 55 (TEFC)

Insulation class : F (155 °C)

Temp rise : Class B (80K)

Mounting Design : B3

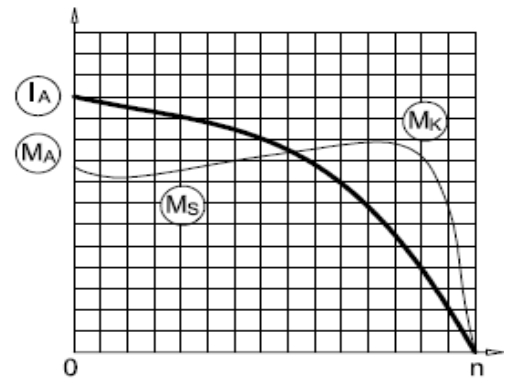

ELECTRICAL DESIGN

Direct On Line

Rated output (kW) : 0.75

Speed (rpm) : 920

Rated current (A) : 2

Torque – Mn (Nm) : 7.79

Cos φ : 0.71

	4/4	3/4	1/2
Efficiency %	75.9	75.9	72.4

Moment of inertia J (kgm)² : 0.0034

Locked rotor Current – Ia (A) : 8

Ia / In : 4.0

Locked rotor Torque – Ma (Nm) : 17

Ma / Mn : 2.2

Y / Δ Starting

Locked rotor Current – Ia (A) : -

Ia / In : -

Locked rotor Torque – Ma (Nm) : -

Ma / Mn : -

Breakdown Torque – Mk (Nm) : 19

Mk / Mn : 2.4

MECHANICAL DESIGN

Frame : Aluminium

End shields : Aluminium

Cooling fan : Plastic

Terminal box : Plastic

Cable gland : Pg 16

No of cable glands : 1

Bearing Arrangement

Standard design

Reinforced design

Noise Level (dB-A) : 46

Paint : RAL 7031- Grey

Approximate weight (kg) : 12.2

Drive End


6205 ZZ

-

Non Drive End

6205 ZZ

-

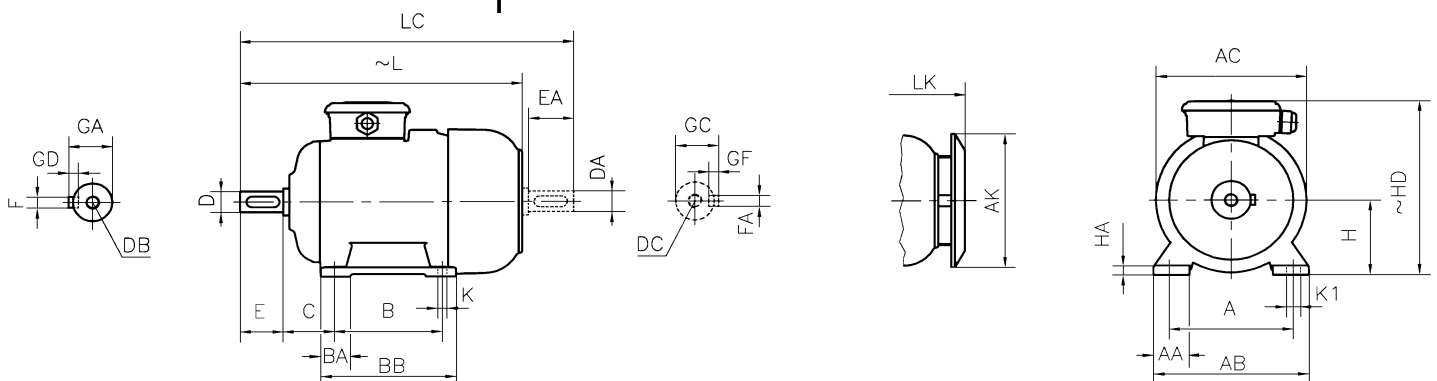

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
90	216	12	140	43	180	176	151	10	15	100	-	35	-	130	309	364	338	56	50	M8	24	27	8X7

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.