

AGM2E 80 2a

IE2

GAMAK

3-Phase 230/400 V 50 Hz


Duty Type : S1

Degree of protection : IP 55 (TEFC)

Insulation class : F (155 °C)

Temp rise : Class B (80K)

Mounting Design : B3

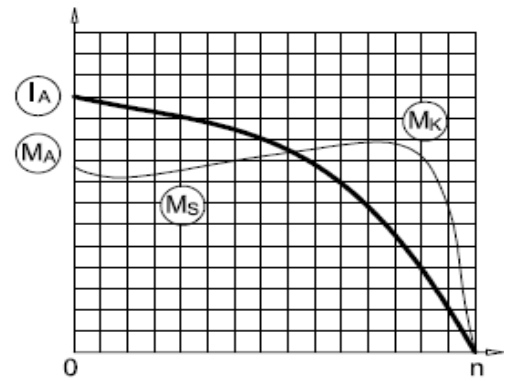

ELECTRICAL DESIGN

Direct On Line

Rated output (kW) : 0.75

Speed (rpm) : 2860

Rated current (A) : 1.7

Torque – Mn (Nm) : 2.5

Cos φ : 0.82

	4/4	3/4	1/2
Efficiency %	77.8	77.7	74.6

Moment of inertia J (kgm)² : 0.00053

Locked rotor Current – Ia (A) : 11

Ia / In : 6.2

Locked rotor Torque – Ma (Nm) : 6

Ma / Mn : 2.5

Y / Δ Starting

Locked rotor Current – Ia (A) : -

Ia / In : -

Locked rotor Torque – Ma (Nm) : -

Ma / Mn : -

Breakdown Torque – Mk (Nm) : 8

Mk / Mn : 3.0

MECHANICAL DESIGN

Frame : Aluminium

End shields : Aluminium

Cooling fan : Plastic

Terminal box : Plastic

Cable gland : Pg 16

No of cable glands : 1

Bearing Arrangement

Standard design

Reinforced design

Noise Level (dB-A) : 54

Paint : RAL 7031- Grey

Approximate weight (kg) : 8

Drive End


6204 ZZ

-

Non Drive End

6204 ZZ

-

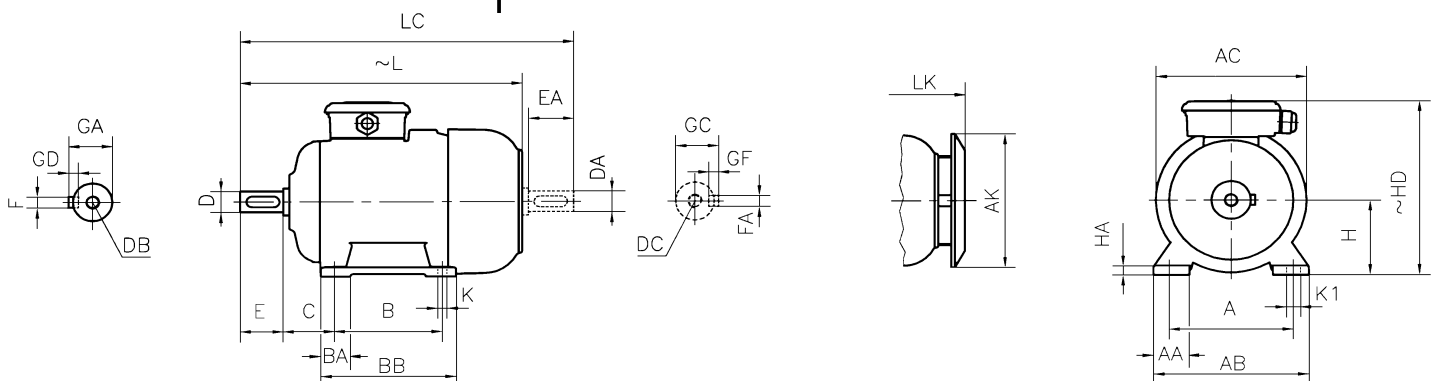

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
80	198	10	125	38	160	156	151	10	15	100	-	33	-	125	279	324	308	50	40	M6	19	21.5	6X6

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.