

AGM3E 180 M 4

IE3

GAMAK

3-Phase 400 V (Δ) 50 Hz

Duty Type : S1

Degree of protection : IP 55 (TEFC)


Insulation class : F (155 °C)

Temp rise : Class B (80K)

Mounting Design : B3

ELECTRICAL DESIGN

Direct On Line

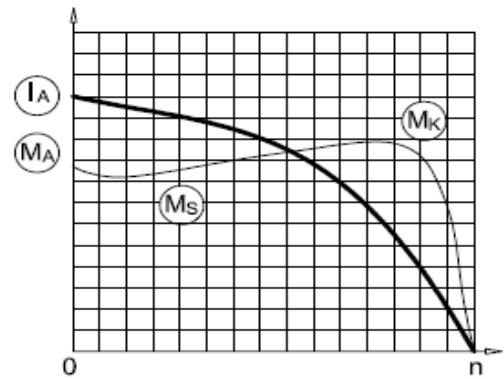

Rated output (kW) : 18.5

Locked rotor Current – I_a (A) : 269

I_a / I_n : 7.8

Speed (rpm) : 1475

Locked rotor Torque – M_a (Nm) : 384

M_a / M_n : 3.2

Rated current (A) : 34.5

Y / Δ Starting

Torque – M_n (Nm) : 120

Locked rotor Current – I_a (A) : 90

I_a / I_n : 2.6

Cos φ : 0.84

Locked rotor Torque – M_a (Nm) : 120

	4/4	3/4	1/2
Efficiency %	92.6	92.6	91.6

M_a / M_n : 1.0

Moment of inertia J (kgm)² : 0.15

Breakdown Torque – M_k (Nm) : 456

M_k / M_n : 3.8

MECHANICAL DESIGN

Frame : Aluminium

End shields : Aluminium

Cooling fan : Plastic

Terminal box : Plastic

Cable gland : Pg 29

No of cable glands : 2

Bearing Arrangement

Standard design

Drive End

6310 ZZ C3

Non Drive End

6210 ZZ C3

Reinforced design


NU 310 E

6310 C3

Noise Level (dB-A) : 62

Paint : RAL 7031- Grey

Approximate weight (kg) : 160

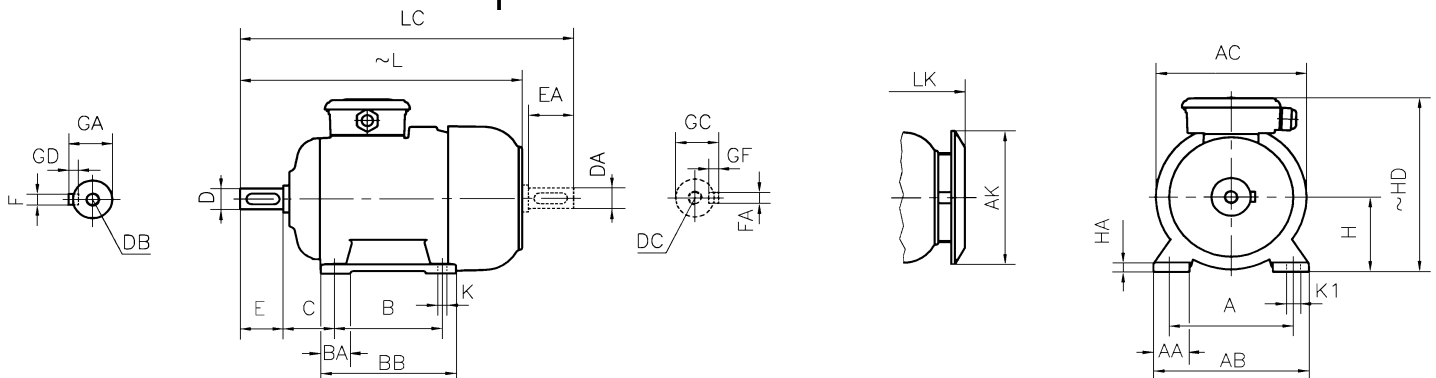

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
180	421	24	279	68	354	348	303	15	19	241	279	57	95	320	657	773	714	121	110	M16	48	51.5	14X9

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.