

GEMÜ 655

Manually operated full bore diaphragm valve



Features

- High mechanical stability
- High flow rate due to straight through flow
- Can be retrofitted with a pneumatic actuator

Description

The GEMÜ 655 2/2-way diaphragm valve has a metal handwheel and is manually operated. The valve body has a full bore design.

Technical specifications


- Media temperature: 0 to 100 °C
- Ambient temperature: 0 to 60 °C
- Operating pressure : 0 to 7 bar
- Nominal sizes: DN 25 to 300
- Body configurations: 2/2-way body
- Connection types: Flange
- Connection standards: ANSI | EN | ISO
- Body materials: EN-GJL-250, cast iron material | EN-GJS-400-18-LT, SG iron material | EN-GJS-500-7, ductile iron material
- Body lining: Butyl | Hard rubber | Soft rubber
- Diaphragm materials: CR | EPDM | IIR | NBR | NR
- Conformities: EAC

Technical data depends on the respective configuration



Product description

Construction

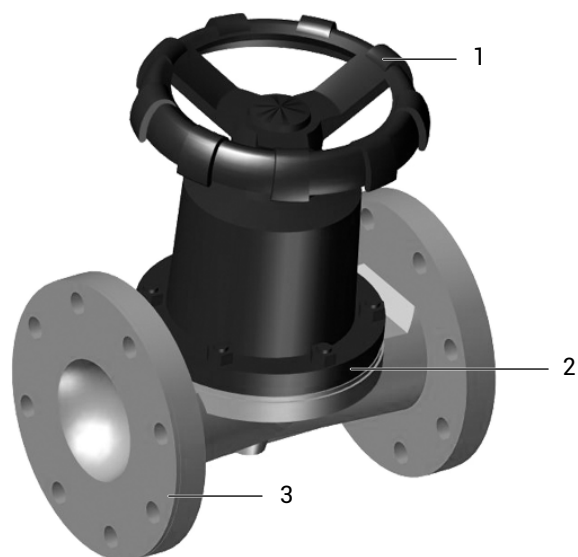

Item	Name	Materials
1	Operator	Cast iron
2	Diaphragm	CR EPDM IIR NBR NR
3	Valve body	EN-GJL-250 (GG 25) EN-GJL-250 (GG 25), hard rubber lined EN-GJS-500-7 (GGG 50), hard rubber lined EN-GJL-250 (GG 25), soft rubber lined EN-GJL-250 (GG 25), butyl lined EN-GJS-400-18-LT (GGG 40.3), soft rubber lined EN-GJS-400-18-LT (GGG 40.3), hard rubber lined EN-GJS-400-18-LT (GGG 40.3), butyl lined EN-GJS-500-7 (GGG 50), soft rubber lined EN-GJS-500-7 (GGG 50), butyl lined

Availability

Flange

D N	Connection types code ¹⁾																							
	8			39			52				53						58							
	Material code ²⁾																							
	82	83	88	82	83	88	8	13	52	58	8	13	16	52	58	92	98	8	13	16	52	58	92	98
25	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
40	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
50	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
65	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
80	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
100	X	X	X	X	X	X	-	-	-	-	X	-	X	X	X	X	X	X	-	X	-	-	X	X
125	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
150	X	X	X	X	X	X	-	-	-	-	X	X	-	X	X	-	-	X	-	X	-	-	X	X
200	-	-	-	-	-	-	X	X	X	X	-	-	-	-	-	-	-	X	X	-	X	X	-	-
250	-	-	-	-	-	-	X	X	X	X	-	-	-	-	-	-	-	X	X	-	X	X	-	-
300	-	-	-	-	-	-	X	X	X	X	-	-	-	-	-	-	-	X	X	-	X	X	-	-

1) Connection type

Code 8: Flange EN 1092, PN 16, form B, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1
 Code 39: Flange ANSI Class 125/150 RF, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1
 Code 52: Flange EN 1092, PN 10, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7
 Code 53: Flange EN 1092, PN 16, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7
 Code 58: Flange ANSI Class 125/150 FF, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7

2) Valve body material

Code 8: EN-GJL-250 (GG 25)
 Code 13: EN-GJL-250 (GG 25), hard rubber lined
 Code 16: EN-GJS-500-7 (GGG-50), hard rubber lined
 Code 52: EN-GJL-250 (GG 25), soft rubber lined
 Code 58: EN-GJL-250 (GG 25), Butyl lined
 Code 82: EN-GJS-400-18-LT (GGG 40.3), soft rubber lined
 Code 83: EN-GJS-400-18-LT (GGG 40.3), hard rubber lined
 Code 88: EN-GJS-400-18-LT (GGG 40.3), Butyl lined
 Code 92: EN-GJS-500-7 (GGG 50), soft rubber lined
 Code 98: EN-GJS-500-7 (GGG 50), Butyl lined

Order data

The order data provide an overview of standard configurations.

Please check the availability before ordering. Other configurations available on request.

Order codes

1 Type	Code
Full bore diaphragm valve, manually operated, metal handwheel, metal bonnet	655

2 DN	Code
DN 25	25
DN 40	40
DN 50	50
DN 65	65
DN 80	80
DN 100	100
DN 125	125
DN 150	150
DN 200	200
DN 250	250
DN 300	300

3 Body configuration	Code
2/2-way body	D

4 Connection type	Code
Flange EN 1092, PN 16, form B, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1	8
Flange ANSI Class 125/150 RF, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1	39
Flange EN 1092, PN 10, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7	52
Flange EN 1092, PN 16, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7	53
Flange ANSI Class 125/150 FF, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7	58

5 Valve body material	Code
EN-GJL-250 (GG 25)	8
EN-GJL-250 (GG 25), hard rubber lined	13
EN-GJS-500-7 (GGG-50), hard rubber lined	16
EN-GJL-250 (GG 25), soft rubber lined	52
EN-GJL-250 (GG 25), Butyl lined	58
EN-GJS-400-18-LT (GGG 40.3), soft rubber lined	82
EN-GJS-400-18-LT (GGG 40.3), hard rubber lined	83
EN-GJS-400-18-LT (GGG 40.3), Butyl lined	88

5 Continuation of Valve body material	Code
EN-GJS-500-7 (GGG 50), soft rubber lined	92
EN-GJS-500-7 (GGG 50), Butyl lined	98

6 Diaphragm material	Code
NBR	2
IIR	6
CR	8
EPDM	14
NR	15

7 Control function	Code
Manually operated	0

8 Operator version	Code
Operator size 2, for DN 25 and 40	2
Operator size 4, for DN 50 and 65	4
Operator size 6, for DN 80 and 100	6
Operator size 7, for DN 125 and 150	7
Operator size 8, for DN 200	8
Operator size 9, for DN 250	9
Operator size A, for DN 300 and 350	A

Order example

Order option	Code	Description
1 Type	655	Full bore diaphragm valve, manually operated, metal handwheel, metal bonnet
2 DN	50	DN 50
3 Body configuration	D	2/2-way body
4 Connection type	53	Flange EN 1092, PN 16, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7
5 Valve body material	8	EN-GJL-250 (GG 25)
6 Diaphragm material	14	EPDM
7 Control function	0	Manually operated
8 Operator version	4	Operator size 4, for DN 50 and 65

Technical data

Medium

Working medium: Corrosive, inert, gaseous and liquid media which have no negative impact on the physical and chemical properties of the body and diaphragm material.

Temperature

Media temperature: 0 to 100 °C

Ambient temperature: 0 to 60 °C

Storage temperature: 0 to 40 °C

Pressure

Operating pressure:

DN	NPS	Operating pressure
25	1"	0 - 7.0
40	1½"	0 - 7.0
50	2"	0 - 7.0
65	2½"	0 - 7.0
80	3"	0 - 7.0
100	4"	0 - 7.0
125	5"	0 - 5.5
150	6"	0 - 5.5
200	8"	0 - 3.5
250	10"	0 - 3.5
300	12"	0 - 3.0

All pressures are gauge pressures. Operating pressure values were determined with static operating pressure applied on one side of a closed valve. Sealing at the valve seat and atmospheric sealing is ensured for the given values.

Information on operating pressures applied on both sides and for high purity media on request.

Valve not suitable for vacuum applications

Kv values:

DN	NPS	Kv values
25	1"	35
40	1½"	38
50	2"	108
65	2½"	114
80	3"	284
100	4"	298
125	5"	650
150	6"	680
200	8"	1790
250	10"	2920
300	12"	5180

Kv values in m³/h

Kv values determined in accordance with EN 60534, inlet pressure 5 bar, Δp 1 bar, valve body material cast iron EN-GJL-250 with connection flange EN 1092 length EN 558 series 7 and soft elastomer diaphragm. The Kv values for other product configurations (e.g. other diaphragm or body materials) may differ. In general, all diaphragms are subject to the influences of pressure, temperature, the process and their tightening torques. Therefore the Kv values may exceed the tolerance limits of the standard.

The Kv value curve (Kv value dependent on valve stroke) can vary depending on the diaphragm material and duration of use.

Product compliance

Pressure Equipment Directive: 2014/68/EU

EAC: TR CU 010/2011

Mechanical data

Weight:

Operator

Operator version	Weight
2	2.0
4	7.0
6	13.0
7	34.0
8	55.0
9	97.0
A	222.0

Weights in kg


Body

DN	Operator version	Weight
25	2	2.9
32	2	4.9
40	2	5.7
50	4	7.5
65	4	10.2
80	6	14.2
100	6	21.0
125	7	30.0
150	7	35.0
200	8	80.0
250	9	137.0
300	A	180.0

Weights in kg

Dimensions

Operator dimensions

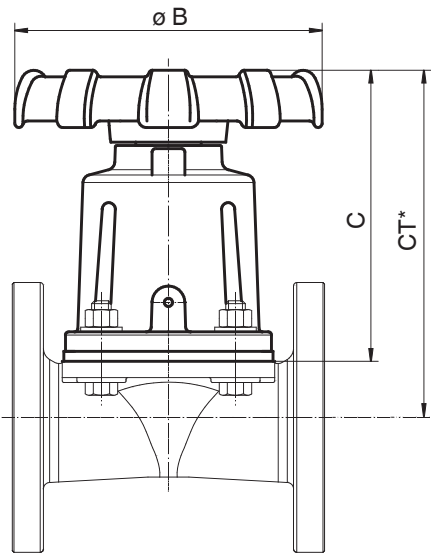


DN	NPS	Operator version	$\varnothing B$	C
25 - 40	1" - 1½"	2	118	130
50 - 60	2" - 2½"	4	188	178
80 - 100	3" - 4"	6	238	229
125 - 150	5" - 6"	7	316	307
200	8"	8	416	359
250	10"	9	416	484
300	12"	A	700	562

Dimensions in mm
 * CT = A + H1 (see body dimensions)

Body dimensions

Flange EN (code 8, 53)

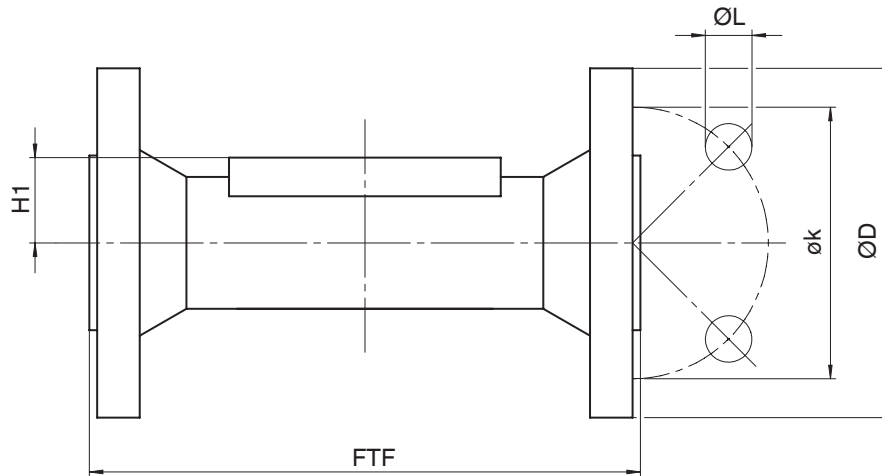

DN	Connection types code ¹⁾												
					8	53	53	53	8	53	53	53	53
	Material code ²⁾												
					82, 83, 88	8, 52, 58	13	16, 92, 98	82, 83, 88	8	13	16, 92, 98	52, 58
	øD	øk	øL	n	H1	H1	H1	H1	FTF	FTF	FTF	FTF	FTF
25	115.0	85.0	14.0	4	24.0	20.0	20.0	-	160.0	127.0	127.0	-	127.0
40	150.0	110.0	19.0	4	24.0	18.0	18.0	-	200.0	159.0	159.0	-	159.0
50	165.0	125.0	19.0	4	32.0	39.0	39.0	-	230.0	191.0	191.0	-	191.0
65	185.0	145.0	19.0	4	32.0	28.0	28.0	-	290.0	216.0	216.0	-	216.0
80	200.0	160.0	19.0	8	40.0	40.0	40.0	-	310.0	254.0	254.0	-	254.0
100	220.0	180.0	19.0	8	40.0	40.0	-	40.0	350.0	305.0	-	305.0	305.0
125	250.0	210.0	19.0	8	55.0	50.0	50.0	-	400.0	356.0	356.0	-	366.0
150	285.0	240.0	23.0	8	55.0	52.0	52.0	-	480.0	406.0	406.0	-	416.0

Dimensions in mm


1) Connection type

Code 8: Flange EN 1092, PN 16, form B, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1
 Code 53: Flange EN 1092, PN 16, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7

2) Valve body material

Code 8: EN-GJL-250 (GG 25)
 Code 13: EN-GJL-250 (GG 25), hard rubber lined
 Code 16: EN-GJS-500-7 (GGG-50), hard rubber lined
 Code 52: EN-GJL-250 (GG 25), soft rubber lined
 Code 58: EN-GJL-250 (GG 25), Butyl lined
 Code 82: EN-GJS-400-18-LT (GGG 40.3), soft rubber lined
 Code 83: EN-GJS-400-18-LT (GGG 40.3), hard rubber lined
 Code 88: EN-GJS-400-18-LT (GGG 40.3), Butyl lined
 Code 92: EN-GJS-500-7 (GGG 50), soft rubber lined
 Code 98: EN-GJS-500-7 (GGG 50), Butyl lined

Flange EN (code 52)

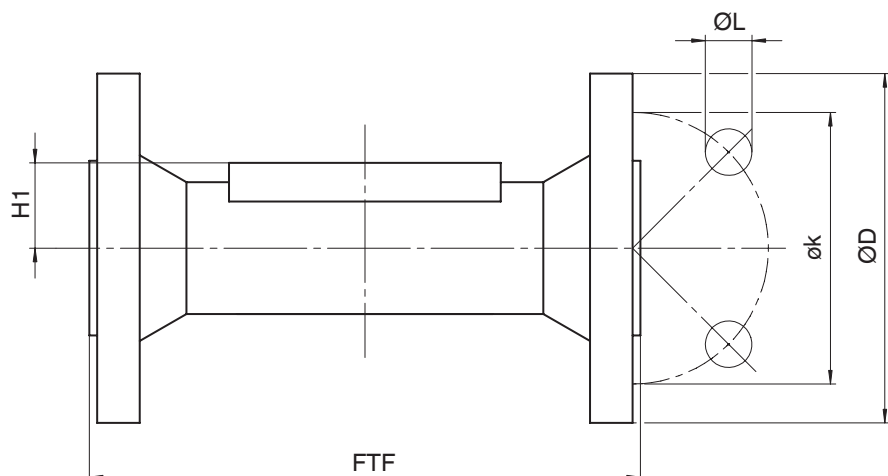

DN	Connection type code 52 ¹⁾						
	Material code ²⁾						
					8, 13, 52, 58	8	13, 52, 58
	øD	øk	øL	n	H1	FTF	FTF
200	340.0	295.0	23.0	8	59.0	531.0	531.0
250	400.0	350.0	23.0	12	78.0	635.0	647.0
300	455.0	400.0	23.0	12	119.0	749.0	761.0

Dimensions in mm

1) Connection type

Code 52: Flange EN 1092, PN 10, form A, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7


2) Valve body material

Code 8: EN-GJL-250 (GG 25)

Code 13: EN-GJL-250 (GG 25), hard rubber lined

Code 52: EN-GJL-250 (GG 25), soft rubber lined

Code 58: EN-GJL-250 (GG 25), Butyl lined

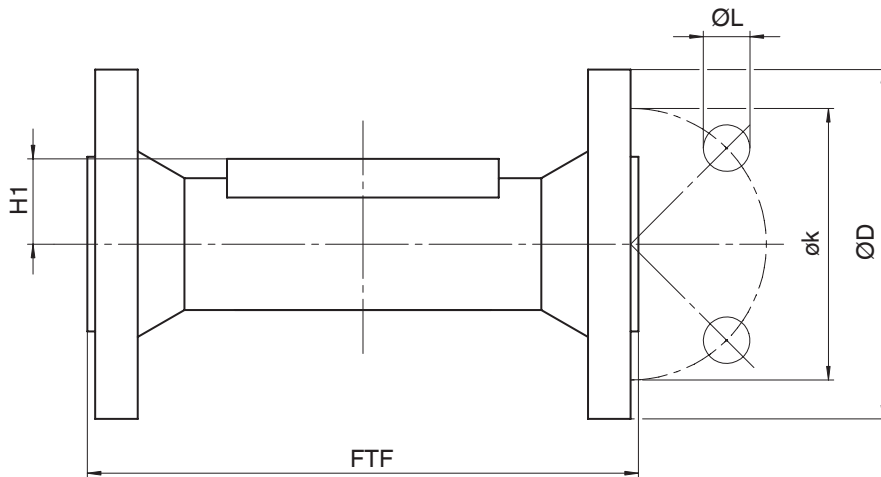Flange ANSI Class (code 39, 58)

DN	Connection types code ¹⁾											
					39	58	58	58	39	58	58	58
	Material code ²⁾											
					82, 83, 88	8	13, 52, 58	16, 92, 98	82, 83, 88	8	13, 52, 58	16, 92, 98
	øD	øk	øL	n	H1	H1	H1	H1	FTF	FTF	FTF	FTF
25	108.0	79.4	15.9	4	24.0	20.0	-	24.0	160.0	127.0	-	127.0
40	127.0	98.4	15.9	4	24.0	18.0	-	24.0	200.0	159.0	-	159.0
50	152.4	120.7	19.0	4	32.0	39.0	-	32.0	230.0	191.0	-	191.0
65	177.8	139.7	19.0	4	32.0	28.0	-	32.0	290.0	216.0	-	216.0
80	190.5	152.4	19.0	4	40.0	40.0	-	40.0	310.0	254.0	-	254.0
100	228.6	190.5	19.0	8	40.0	40.0	-	40.0	350.0	305.0	-	305.0
125	254.0	215.9	22.2	8	55.0	50.0	-	55.0	400.0	356.0	-	366.0
150	279.0	241.3	22.2	8	55.0	52.0	-	55.0	480.0	406.0	-	416.0
200	-	298.5	22.2	8	-	59.0	59.0	-	-	521.0	531.0	-
250	-	362.0	22.2	12	-	78.0	78.0	-	-	635.0	647.0	-
300	-	431.8	22.2	12	-	119.0	119.0	-	-	749.0	761.0	-

Dimensions in mm

1) Connection type

Code 39: Flange ANSI Class 125/150 RF, face-to-face dimension FTF EN 558 series 1, ISO 5752, basic series 1

Code 58: Flange ANSI Class 125/150 FF, face-to-face dimension FTF EN 558 series 7, ISO 5752, basic series 7

2) Valve body material

Code 8: EN-GJL-250 (GG 25)

Code 13: EN-GJL-250 (GG 25), hard rubber lined

Code 16: EN-GJS-500-7 (GGG-50), hard rubber lined

Code 52: EN-GJL-250 (GG 25), soft rubber lined

Code 58: EN-GJL-250 (GG 25), Butyl lined

Code 82: EN-GJS-400-18-LT (GGG 40.3), soft rubber lined


Code 83: EN-GJS-400-18-LT (GGG 40.3), hard rubber lined

Code 88: EN-GJS-400-18-LT (GGG 40.3), Butyl lined

Code 92: EN-GJS-500-7 (GGG 50), soft rubber lined

Code 98: EN-GJS-500-7 (GGG 50), Butyl lined

Diaphragm dimensions

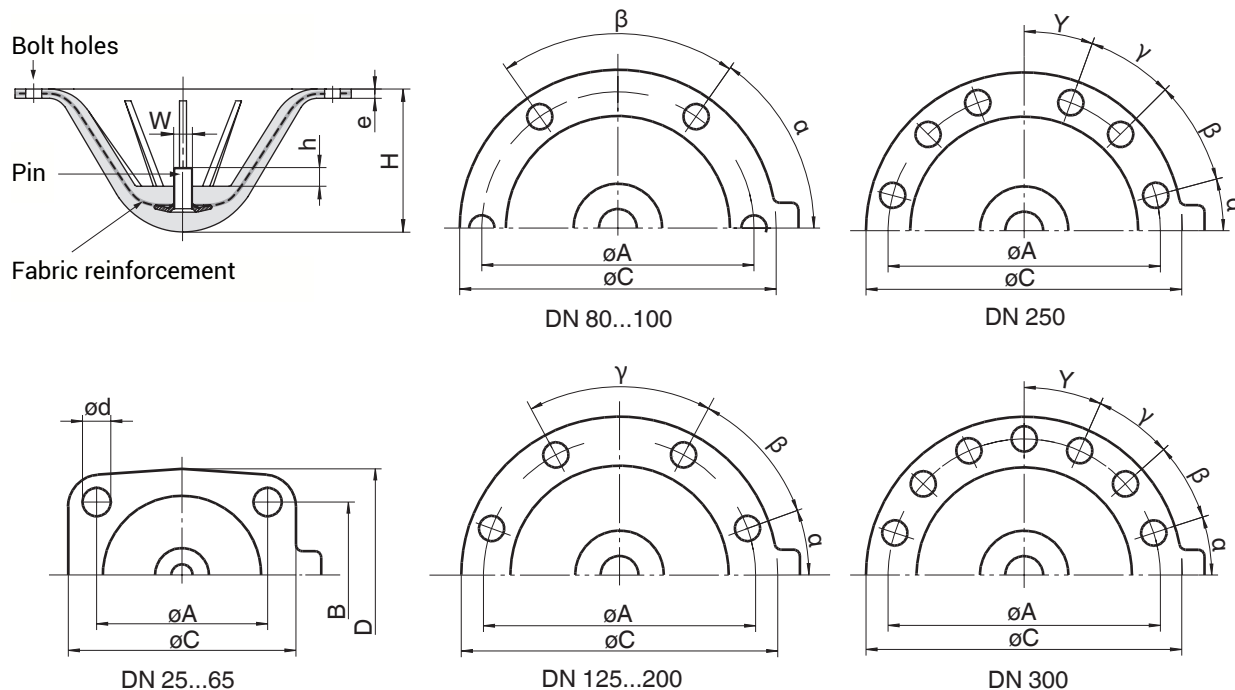

DN	NPS	A	B	C	D	φd	e	h	W	H	α	β	γ	Y	n
25	1"	64.0	51.0	90.0	70.0	9.0	5.0	8.0	1/4"	36.0	-	-	-	-	4
40	1 1/2"	64.0	51.0	90.0	70.0	9.0	5.0	8.0	1/4"	36.0	-	-	-	-	4
50	2"	101.0	82.0	159.0	128.0	13.5	6.0	10.0	5/16"	64.0	-	-	-	-	4
65	2 1/2"	101.0	82.0	159.0	128.0	13.5	6.0	10.0	5/16"	64.0	-	-	-	-	4
80	3"	175.0	-	223.0	-	13.5	6.0	12.0	5/16"	80.0	56°	34°	-	-	6
100	4"	175.0	-	223.0	-	13.5	6.0	12.0	5/16"	80.0	56°	34°	-	-	6
125	5"	255.0	-	287.0	-	13.5	8.0	16.0	5/8"	115.0	20°	40°	60°	-	8
150	6"	255.0	-	287.0	-	13.5	8.0	16.0	5/8"	115.0	20°	40°	60°	-	8
200	8"	305.0	-	341.0	-	18.5	8.0	20.0	5/8"	145.0	30°	40°	40°	-	8
250	10"	381.0	-	410.0	-	17.0	10.0	20.0	5/8"	178.0	15°	30°	25°	20°	12
300	12"	528.0	-	576.0	-	22.0	12.0	25.0	1"	280.0	18°	24°	24°	24°	14

Dimensions in mm

n = number of bolts

The thread of the diaphragm pin "W" corresponds to Whitworth standard.



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG
Fritz-Müller-Straße 6-8, 74653 Ingelfingen-Criesbach,
Germany
Phone +49 (0)7940 123-0 · info@gemue.de
www.gemu-group.com