


Modular Angle Head with Fixed Angle - GM Series

GM



Modularer Winkelkopf mit festem Winkel - GM-Serie

Modüler Sistem Sabit Açılı Kafa - GM Serisi

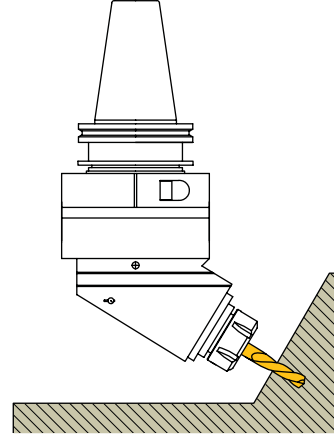

Features

For drilling, tapping and milling operations

Fixed angle body with interchangeable shank

Usable on both CNC and conventional machine tools

Heat-treated aluminium main body

Compact and rigid construction

Coolant feed through stop-bar pin

Orientation ring and stop-bar pin 360° rotatable

Merkmale

Für Bohrungen, Gewindebohren und Fräsbearbeitungen

Gehäuse mit festem Winkel und austauschbarem Kegelschaft

Verwendbar mit CNC- und herkömmlichen Werkzeugmaschinen

Hauptkörper aus wärmebehandelter Aluminiumlegierung

Kompakte und rigide Bauform

Kühlmittelzufuhr durch Anschlagstift

Skalenring und Anschlagstift können um 360° rotiert werden

Özellikler

Delik delme, kılavuz çekme ve frezeleme operasyonları için

Sabit ara açılı gövde ve değiştirilebilir modüler konik

Üniversal ve CNC tezgahlarda kullanılabilir

Isıl işlem görmüş alüminyum alaşımlı gövde

Kompakt ve rijit gövde


İndeks kolundan su vermeli

İndeks kolu ve skala 360° fener mili ekseninde ayarlanabilir



Modularer Winkelkopf mit festem Winkel - GM-Serie

Modüler Sistem Sabit Açılı Kafa - GM Serisi

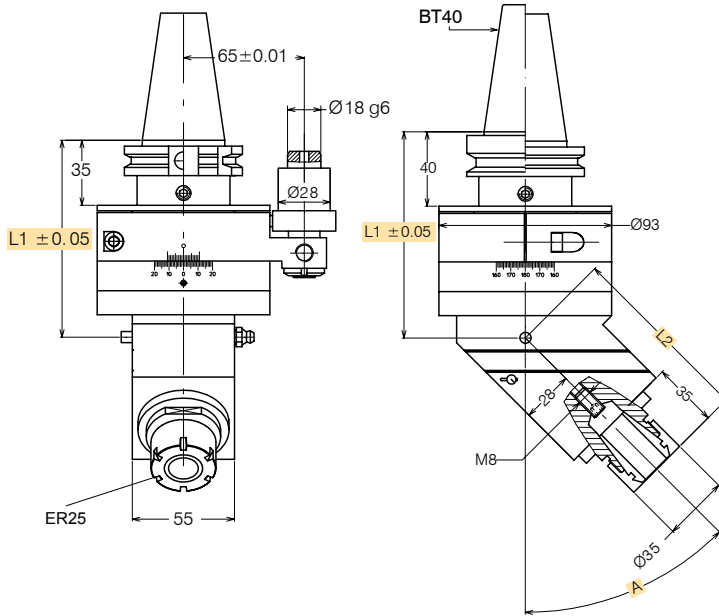

GM-25

SK40 / BT40 / CAT40 / HSK63

ER25

5.000 RPM

3 KW

Power / Kraft / Güç

450 N

Thrust / Schubkraft / Eksenel Kuvvet

1:1

Ratio / Übersetzung / Çevrim Oranı

5 kg

Weight / Gewicht / Ağırlık


Torque / Drehkraft / Tork

23 Nm @ 1.000 RPM

17 Nm @ 2.000 RPM

10 Nm @ 5.000 RPM

A	L1 SK / CAT	L1 BT	L2
2° - 30°	102	107	96
31° - 60°	106	111	100
61° - 90°	115	120	108

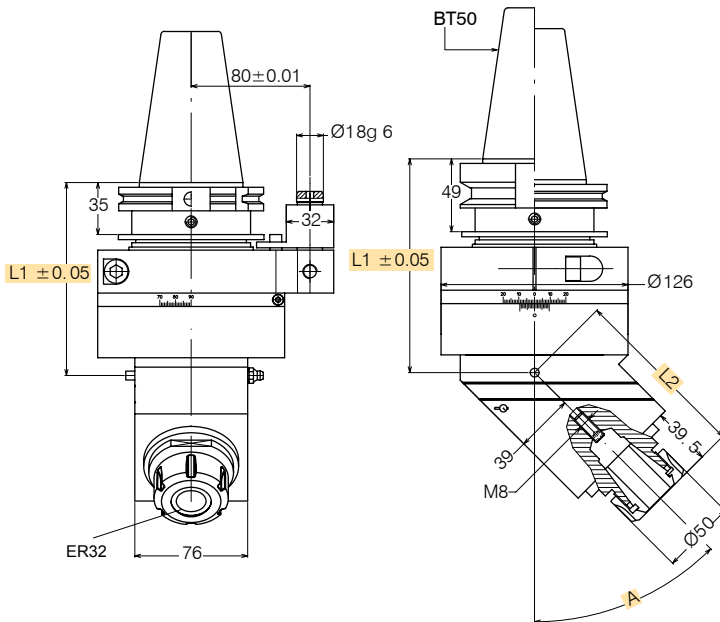

GM-32

SK50 / BT50 / CAT50 / HSK100

ER32

3.000 RPM

5 KW

Power / Kraft / Güç

1200 N

Thrust / Schubkraft / Eksenel Kuvvet

1:1

Ratio / Übersetzung / Çevrim Oranı

11 kg

Weight / Gewicht / Ağırlık

Torque / Drehkraft / Tork

45 Nm @ 1.000 RPM

31 Nm @ 2.000 RPM

23 Nm @ 3.000 RPM

A	L1 SK / CAT	L1 BT	L2
2° - 30°	125	139	113
31° - 60°	130	144	120
61° - 90°	142	156	130

