


90° Slim Angle Head - GS Series

GS



90°-Winkelkopf Schmale Bauform - GS-Serie

90° İnce Açılı Kafa - GS Serisi

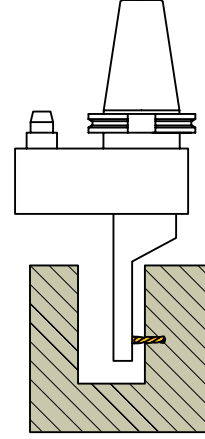

Features

For drilling, tapping and light milling operations

For cutting operations inside small bores

Usable on both CNC and conventional machine tools

Heat-treated aluminium or steel main body

Compact and rigid construction

Coolant feed through stop-bar pin

Merkmale

Für Bohrungen, Gewindebohren und leichte Fräsbearbeitungen

Für Bearbeitungen in kleineren Bohrungen

Verwendbar mit CNC- und herkömmlichen Werkzeugmaschinen

Hauptkörper aus wärmebehandelter Aluminium- oder Stahllegierung

Kompakte und rigide Bauform

Kühlmittelzufuhr durch Anschlagstift

Özellikler

Delik delme, kılavuz çekme ve frezeleme operasyonları için


Yanaşması zor yerlerdeki operasyonlar için

Üniversal ve CNC tezgahlarda kullanılabilir

Isıl işlem görmüş alüminyum veya çelik alaşımlı gövde

Kompakt ve rijit gövde

İndeks kolundan su vermeli

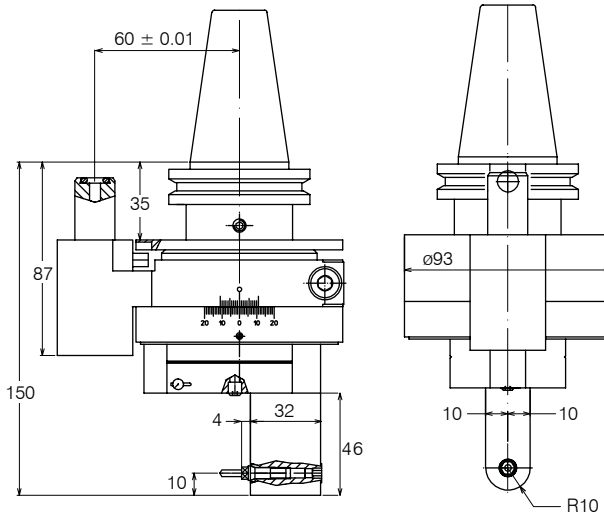

GS-2

SK40 / BT40 / CAT40 / HSK63

6.000 RPM

Ø 3 Max Tool Ø / Max Werkzeug Ø / Maks Kesici Ø
1:1 Ratio / Übersetzung / Çevrim Oranı
6,5 kg Weight / Gewicht / Ağırlık


Ø42 Min. Workpiece Ø without tool
Min. Werkstück Ø ohne Werkzeug
Min. İş Parçası Ø kesici takımsız



90° Slim Angle Head - GS Series

90°-Winkelkopf Schmale Bauform - GS-Serie

90° İnce Açılı Kafa - GS Serisi

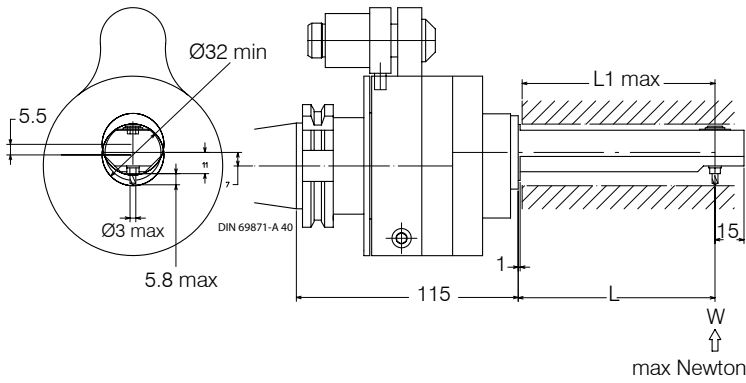

GS-3

SK40 / BT40 / CAT40 / HSK63

6.000 RPM


Ø 3

Max. Tool Ø
Max. Werkzeug Ø
Maks. Kesici Ø

Ø32

Min. Workpiece Ø
Min. Werkstück Ø
Min. İş Parçası Ø

L	L1	W
102	100	55
122	120	35
132	130	25

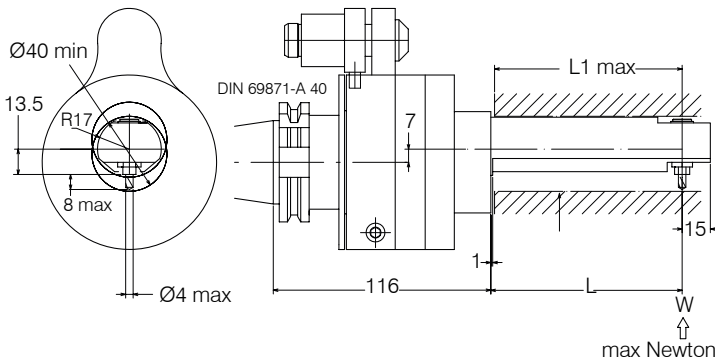

GS-4

SK40 / BT40 / CAT40 / HSK63

6.000 RPM


Ø 4

Max. Tool Ø
Max. Werkzeug Ø
Maks. Kesici Ø

Ø40

Min. Workpiece Ø
Min. Werkstück Ø
Min. İş Parçası Ø

L	L1	W
102	100	100
122	120	70
132	130	55

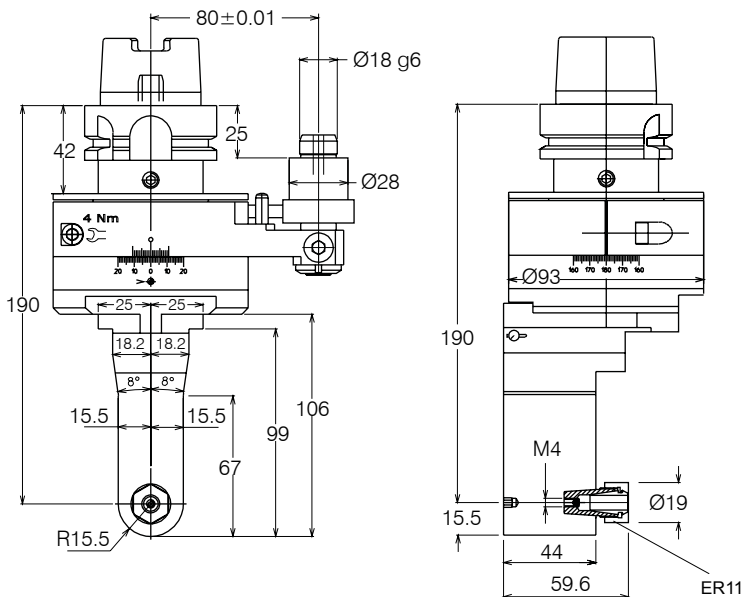

GS-11

SK40 / BT40 / CAT40 / HSK63

ER11

6.000 RPM

1:1 Ratio / Übersetzung / Çevrim Oranı

Ø65

Min. Workpiece Ø without tool
Min. Werkstück Ø ohne Werkzeug
Min. İş Parçası Ø kesici takımsız

TECHNOLOGY IN MOTION