


Description	Value
General information:	
Product name:	UPS 25-125 180
Product No:	On request
EAN number:	On request
Technical:	
Speed no:	3
Rated flow:	1.93 m³/h
Rated head:	9.58 m
Maximum head:	125 dm
TF class:	60
Approvals:	EAC
Materials:	
Pump housing:	Cast iron
	EN 1561 EN-GJL-150
	ASTM 30B
Impeller:	Composite
	PP-GF30
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	1 1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Terminal box position:	9H
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	2 .. 60 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Power input in speed 1:	140 W
Power input in speed 2:	215 W
Max. power input:	275 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.66 A
Current in speed 2:	0.97 A
Current in speed 3:	1.19 A
Capacitor size - run:	5 µF
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Ex-protection standard:	CONTACT
Thermal protec:	internal
Controls:	
Terminal box position:	9H
Others:	
Net weight:	4.4 kg
Gross weight:	4.6 kg
Shipping volume:	0.006 m³



Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

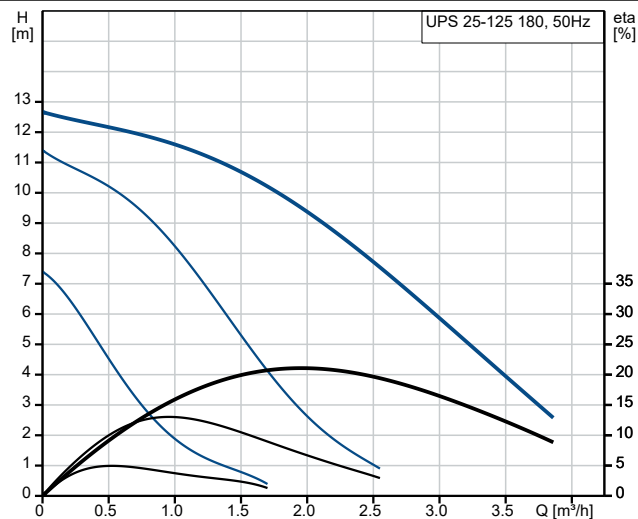