


Description	Value
<b>General information:</b>	
Product name:	CM 10-2 A-R-A-E-AVBE F-A-A-N
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	10 m³/h
Rated head:	27.09 m
Impellers:	2
Primary shaft seal:	AVBE
Code for shaft seal:	AVBE
Approvals:	CE,EAC,UKCA
Approvals for drinking water:	ACS,NSF61
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
<b>Materials:</b>	
Type key, code for materials:	A
Type key, code for rubber components. E = EPDM, V=FKM:	E
Pump housing:	Cast iron EN-GJL-200 ASTM A48-25A
Impeller:	Stainless steel EN 1.4301 AISI 304
Material code:	A
Code for rubber:	E
<b>Installation:</b>	
Range of ambient temperature:	-20 ... 55 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 40 °C 6 bar / 90 °C
Type key, code for pipework connection:	R
Type of connection:	Rp
Size of inlet connection:	1 1/2 inch
Size of outlet connection:	1 1/2 inch
Terminal box position:	12
Outlet position:	12
Connect code:	R
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-20 ... 90 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
<b>Electrical data:</b>	
Motor standard:	IEC
Frame size:	90SD
IE efficiency class:	IE3
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Suitable for 50/60 Hz (Yes/No):	N
Rated voltage:	3 x 220-240D/380-415Y V
Service factor:	1.00
Rated current:	5.70/3.30 A



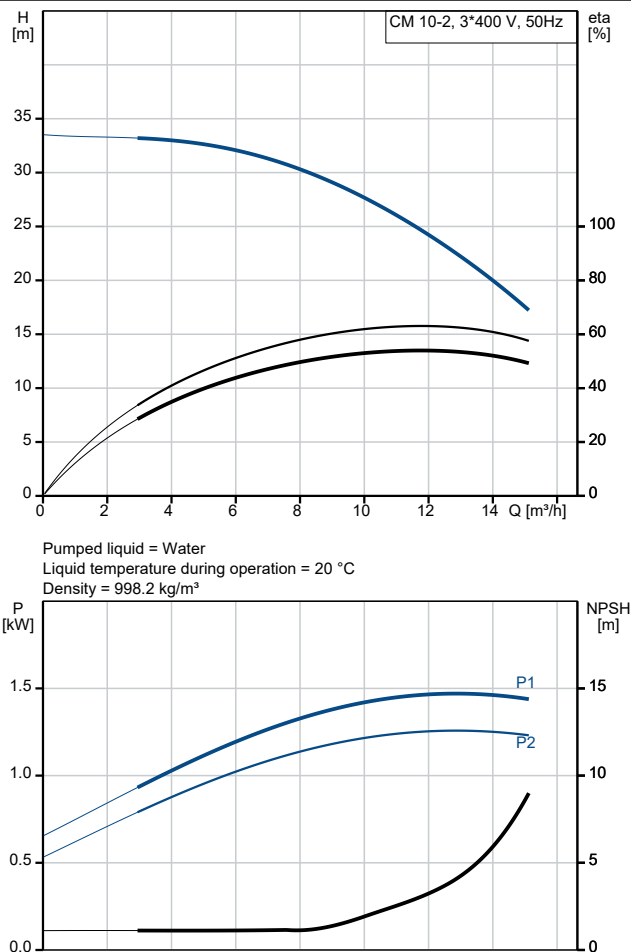

Company name:

Created by:

Phone:

Date:

17/01/2026

Description	Value
Starting current:	710-790 %
Rated speed:	2890-2910 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Ex-protection standard:	NONE
Cable included (Yes/No):	N
<b>Controls:</b>	
Terminal box position:	12
Frequency converter:	None
<b>Others:</b>	
Minimum efficiency index, MEI ≥:	0.7
Net weight:	30.5 kg
Gross weight:	33 kg
Country of origin:	HU
Custom tariff no.:	84137075

