




Company name:

Created by:

Phone:

Date: 11/01/2026

Description	Value
<b>General information:</b>	
Product name:	VFI/-12-240m/1/ C/M5.00-X/EG6/SG/42F/AC-1
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Approvals:	CCSAUS
Approvals for drinking water:	AS4020, WRAS, UBA, ACS
Pressure differential functionality (Yes/No):	N
Pressure relative functionality (Yes/No):	N
Flow functionality (Yes/No):	Y
Temperature functionality (Yes/No):	N
<b>Installation:</b>	
Range of ambient temperature:	-25 .. 60 °C
<b>Liquid:</b>	
Liquid temperature range:	-30 .. 110 °C
<b>Electrical data:</b>	
Enclosure class (IEC 34-5):	IP67
Length of cable:	5 m
Minimum rated voltage DC:	12.50 V
Maximum rated voltage DC:	30.00 V
<b>Others:</b>	
Net weight:	15 kg
Gross weight:	16.4 kg
Danish VVS No.:	488177240
Finnish LVI No.:	4467317
Country of origin:	DK
Custom tariff no.:	90261021

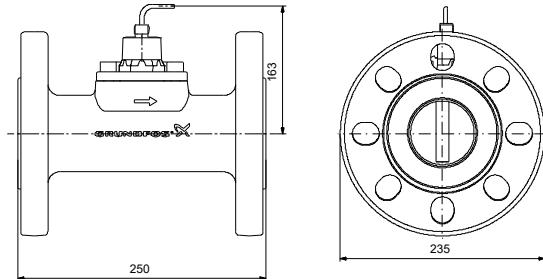



Company name:

Created by:

Phone:

Date:

11/01/2026

**Order Data:**

Position	Your pos.	Product name	Amount	Product No	Total
		VFI-12-240m/1/ C/M5.00-X/EG6/SG/42F/AC-1	1	On request	