




Company name:

Created by:

Phone:

Date: 13/01/2026

Description	Value
General information:	
Product name:	PM 2
Product No:	On request
EAN number:	On request
Technical:	
Approvals:	CE
Return valve:	YES
Adjustable start pressure (Yes/No):	Y
Start pressure:	1.5 - 5.0 bar
Materials:	
Pump housing:	Composite Polypropylene
Installation:	
Maximum ambient temperature:	50 °C
Maximum operating pressure:	10 bar
Inlet connect:	NPT1"
Outlet connect:	NPT1"
Inlet thread:	EXTERNAL
Outlet thread:	EXTERNAL
Liquid:	
Liquid temperature range:	0 .. 40 °C
Electrical data:	
Max. P1:	2000 W
Mains frequency:	50 Hz
Suitable for 50/60 Hz (Yes/No):	Yes
Rated voltage:	1 x 220-240 V
Maximum current consumption:	10 A
Enclosure class (IEC 34-5):	IP65
Power plug:	No plug
Controls:	
Type of connector:	No plug
Dry running protection:	YES
Tank:	
Tank volume:	0.1 l
Others:	
Net weight:	1 kg
Gross weight:	1.85 kg
Shipping volume:	0.008 m ³
Environmental approvals:	WEEE

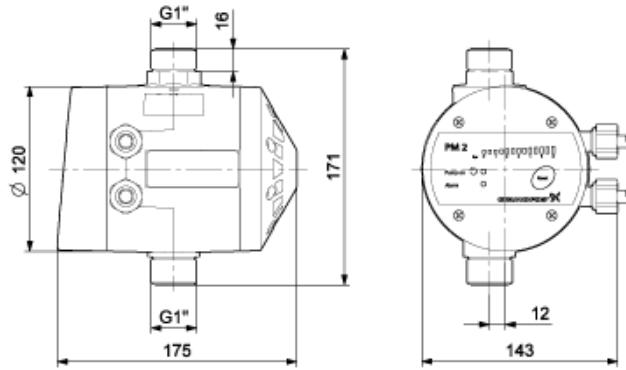



Company name:

Created by:

Phone:

Date:

13/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		PM 2	1	On request	