



Company name:



Created by:

Phone:

Date:

17/01/2026

Description	Value
General information:	
Product name:	CRT 2-7
	A-P-A-V-AUUV
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	2.5 m ³ /h
Rated head:	40 m
Maximum head:	65.1 m
Stages:	7
Impellers:	7
Primary shaft seal:	AUUV
Code for shaft seal:	AUUV
Approvals:	CE,EAC,UKCA,SEPRO
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Type key, code for materials:	A
Type key, code for rubber components. E = EPDM, V=FKM:	V
Pump housing:	Titanium
Impeller:	Titanium
	ASTM B 265
	ASTM B265
Material code:	A
Code for rubber:	V
Bearing:	SIC
Installation:	
Maximum operating pressure:	25 bar
Max pressure at stated temp:	25 bar / 90 °C
	25 bar / -20 °C
Type key, code for pipework connection:	P
Type of connection:	PJE
Pipe connection:	42,4 mm
Flange size for motor:	FT100
Connect code:	P
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 90 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Power (P2) required by pump:	0.75 kW
Controls:	
Frequency converter:	None
Others:	
Minimum efficiency index, MEI ≥:	0.7
Net weight:	10.2 kg
Gross weight:	15.2 kg
Shipping volume:	0 m ³

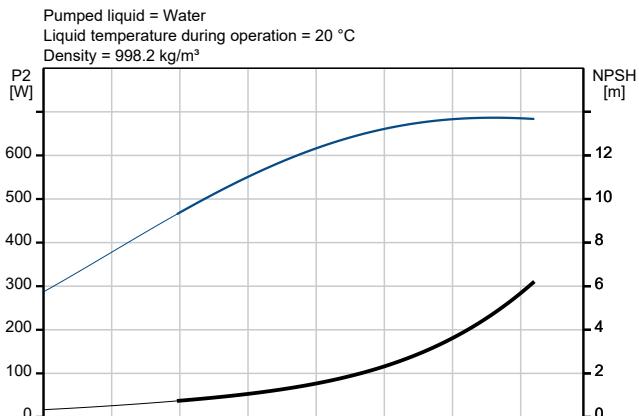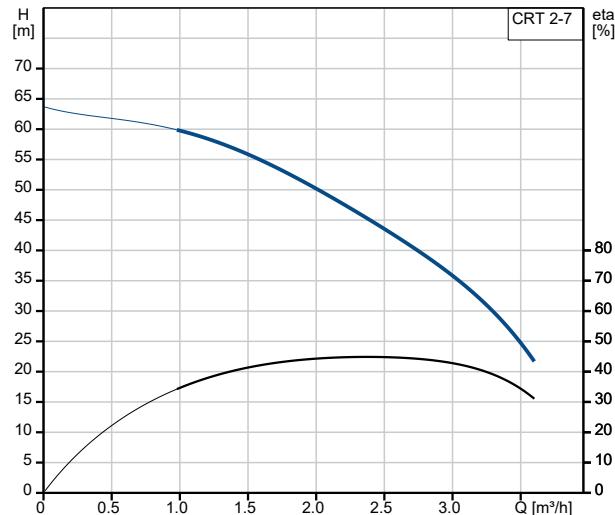



Company name:

Created by:

Phone:

Date:

17/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		CRT 2-7 A-P-A-V-AUUV	1	On request	