

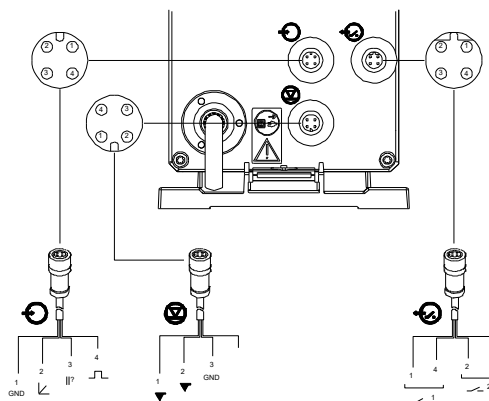


Description	Value
General information:	
Product name:	DDC 15-4 A-PVC/V/C-F-31I002FG
Product No:	On request
EAN number:	On request
Technical:	
Type key:	DDC 15-4 A-PVC/V/C-F-31I002FG
Max. Flow:	15 l/h
Max. flow in slow mode 50%:	7.5 l/h
Max. flow in slow mode 25%:	3.75 l/h
Min flow:	15.0 ml/h
Turn-down ratio:	1:1000
Approvals:	CE,CSA-US,NSF61,EAC,RCM
Valve type:	Standard
Maximum viscosity at 100 %:	300 mPas
Maximum viscosity in slow mode 50 %:	1300 mPas
Maximum viscosity in slow mode 25 %:	2000 mPas
Accuracy of repeatability:	1 %
Materials:	
Dosing head:	PVC (Polyvinyl chloride)
Valve ball:	Ceramic
Gasket:	FKM
Installation:	
Range of ambient temperature:	0 .. 45 °C
Maximum operating pressure:	4 bar
Installation set (Yes/No):	YES
Installation type:	9/12 mm up to 60 l/h, 13 bar
Pump inlet:	Hose 9/12 mm 6
Pump outlet:	Hose 9/12 mm 6
Max. Suction lift during operation:	6 m
Max. Suction lift during priming:	3 m
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Maximum power input - P1:	22 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 100-240 V
Enclosure class (IEC 34-5):	IP65 / TYPE 4X
Length of cable:	1.5 m
Type of cable plug:	EU
Inrush current:	25A at 230V for 2ms
Controls:	
Control variant:	A
Control panel:	Front-Mounted
Level control:	YES
Pulse control:	YES
Ext. Stop input:	Yes
Output relays:	0
Others:	
Net weight:	2 kg
Gross weight:	3 kg

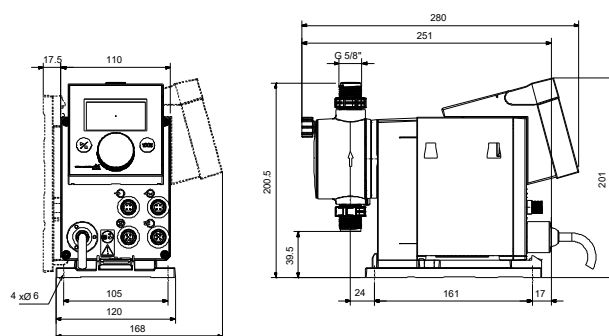

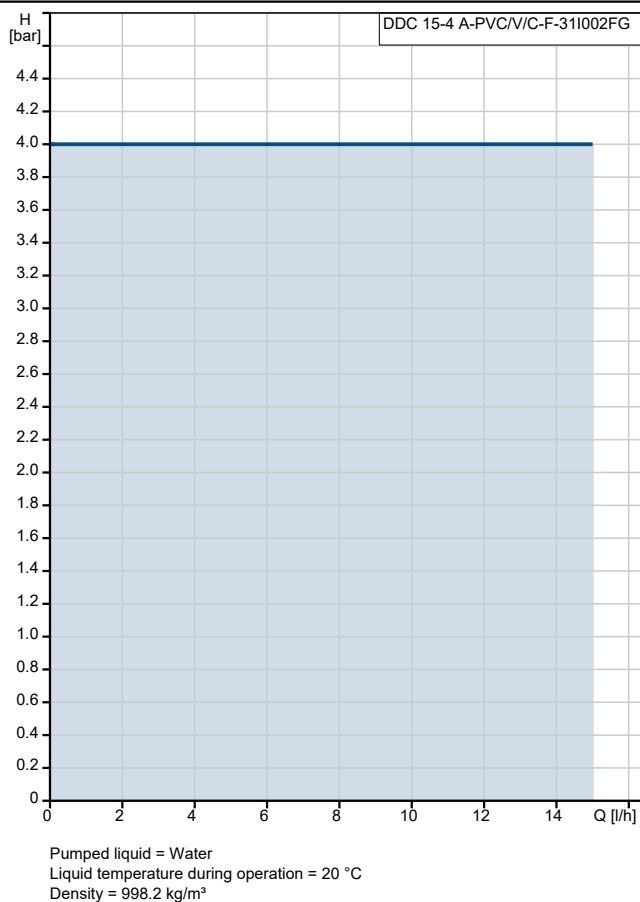

Company name:

Created by:

Phone:

Date:

12/01/2026

Description	Value
Colour:	RED

