

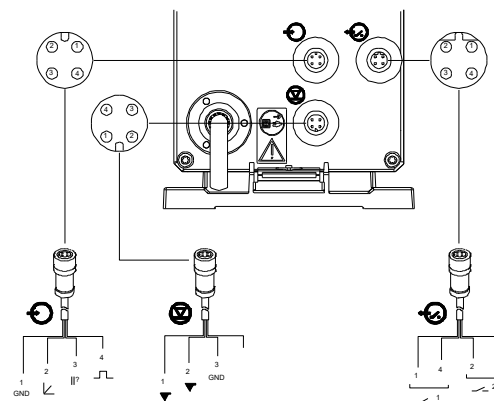


| Description                          | Value                           |
|--------------------------------------|---------------------------------|
| <b>General information:</b>          |                                 |
| Product name:                        | DDC 6-10<br>A-PP/E/C-F-31U2U2FG |
| Product No:                          | On request                      |
| EAN number:                          | On request                      |
| <b>Technical:</b>                    |                                 |
| Type key:                            | DDC 6-10<br>A-PP/E/C-F-31U2U2FG |
| Max. Flow:                           | 6 l/h                           |
| Max. flow in slow mode 50%:          | 3 l/h                           |
| Max. flow in slow mode 25%:          | 1.5 l/h                         |
| Min flow:                            | 6.0 ml/h                        |
| Turn-down ratio:                     | 1:1000                          |
| Approvals:                           | CE, CSA-US, EAC, RCM            |
| Valve type:                          | Standard                        |
| Maximum viscosity at 100 %:          | 50 mPas                         |
| Maximum viscosity in slow mode 50 %: | 1800 mPas                       |
| Maximum viscosity in slow mode 25 %: | 2500 mPas                       |
| Accuracy of repeatability:           | 1 %                             |
| <b>Materials:</b>                    |                                 |
| Dosing head:                         | PP (Polypropylene)              |
| Valve ball:                          | Ceramic                         |
| Gasket:                              | EPDM                            |
| <b>Installation:</b>                 |                                 |
| Range of ambient temperature:        | 0 .. 45 °C                      |
| Maximum operating pressure:          | 10 bar                          |
| Installation set (Yes/No):           | NO                              |
| Installation type:                   | No installation set             |
| Pump inlet:                          | 4/6, 6/9, 6/12, 9/12 mm         |
| Pump outlet:                         | 4/6, 6/9, 6/12, 9/12 mm         |
| Max. Suction lift during operation:  | 6 m                             |
| Max. Suction lift during priming:    | 2 m                             |
| <b>Liquid:</b>                       |                                 |
| Pumped liquid:                       | Water                           |
| Liquid temperature range:            | 0 .. 45 °C                      |
| Selected liquid temperature:         | 20 °C                           |
| Density:                             | 998.2 kg/m³                     |
| <b>Electrical data:</b>              |                                 |
| Maximum power input - P1:            | 22 W                            |
| Mains frequency:                     | 50 / 60 Hz                      |
| Rated voltage:                       | 1 x 100-240 V                   |
| Enclosure class (IEC 34-5):          | IP65 / TYPE 4X                  |
| Length of cable:                     | 1.5 m                           |
| Type of cable plug:                  | EU                              |
| Inrush current:                      | 25A at 230V for 2ms             |
| <b>Controls:</b>                     |                                 |
| Control variant:                     | A                               |
| Control panel:                       | Front-Mounted                   |
| Level control:                       | YES                             |
| Pulse control:                       | YES                             |
| Ext. Stop input:                     | Yes                             |
| Output relays:                       | 0                               |
| <b>Others:</b>                       |                                 |
| Net weight:                          | 2 kg                            |
| Gross weight:                        | 3 kg                            |
| Colour:                              | RED                             |

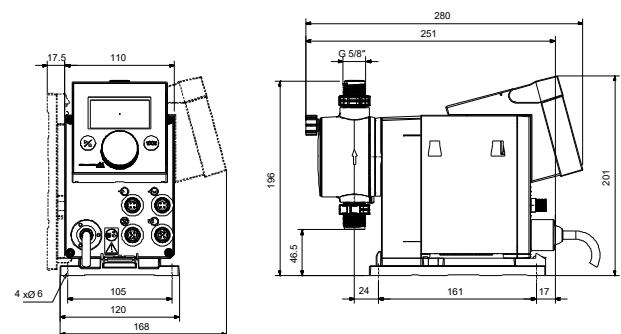

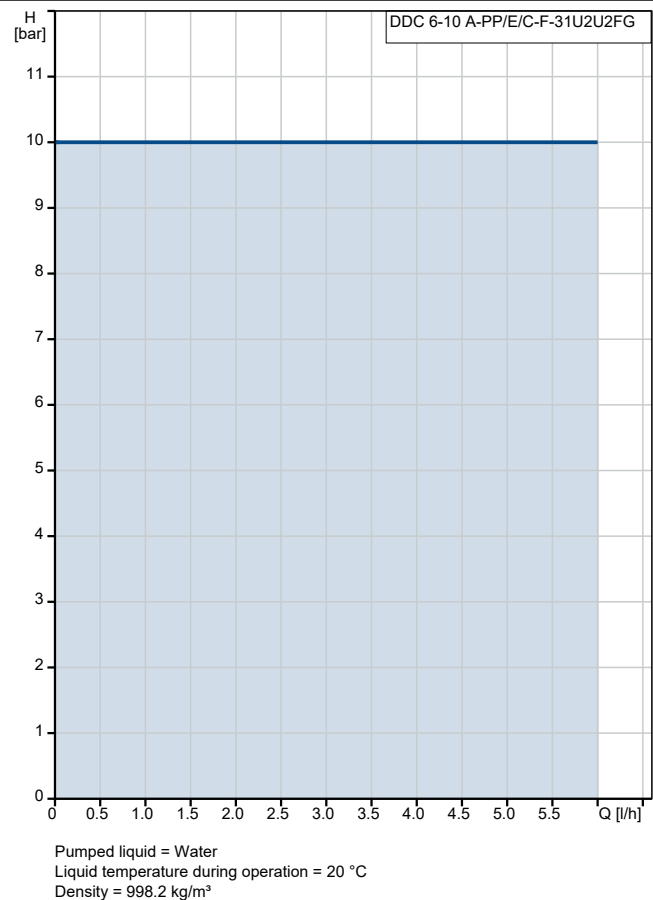

Company name:

Created by:

Phone:

Date:

12/01/2026

| Description      | Value   |
|------------------|---------|
| Finnish LVI No.: | 4981112 |

