



Company name:


Created by:

Phone:

Date:

17/01/2026

Description	Value
<b>General information:</b>	
Product name:	DDE 6-10 B-PVC/V/C-X-31I001FG
Product No:	On request
EAN number:	On request
<b>Technical:</b>	
Max. Flow:	6 l/h
Min flow:	6.0 ml/h
Turn-down ratio:	1:1000
Approvals:	CE,CSA-US,NSF61,EAC,RCM
Valve type:	Standard
Model:	A
Maximum viscosity at 100 %:	50 mPas
Maximum viscosity in slow mode 50 %:	N/A mPas
Maximum viscosity in slow mode 25 %:	N/A mPas
Accuracy of repeatability:	5 %
<b>Materials:</b>	
Dosing head:	PVC (Polyvinyl chloride)
<b>Installation:</b>	
Range of ambient temperature:	0 .. 45 °C
Maximum operating pressure:	10 bar
Type of inlet connection:	Hose
Type of outlet connection:	Hose
Installation set (Yes/No):	YES
Installation type:	4/6 mm up to 7,5 l/h,16 bar
Size of inlet connection:	4/6
Size of outlet connection:	4/6
Max. Suction lift during operation:	6 m
Max. Suction lift during priming:	2 m
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input P1:	19 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 100-240 V
Enclosure class (IEC 34-5):	IP65 / NEMA 4X
Length of cable:	1.5 m
Inrush current:	25A at 230V for 2ms
<b>Controls:</b>	
Control variant:	B
Ext. Stop input:	No
Output relays:	No
<b>Others:</b>	
Net weight:	2.06 kg
Gross weight:	2.66 kg
Country of origin:	FR
Custom tariff no.:	84135040

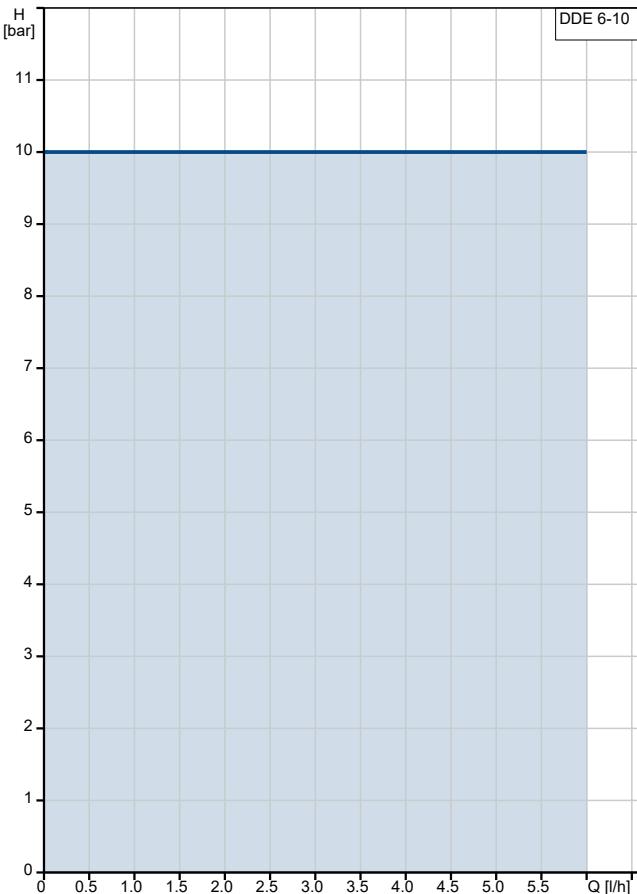

Pumped liquid = Water

Liquid temperature during operation = 20 °C

Density = 998.2 kg/m<sup>3</sup>



Company name:

Created by:

Phone:

Date:

17/01/2026

**Order Data:**

Position	Your pos.	Product name	Amount	Product No	Total
		DDE 6-10 B-PVC/V/C-X-31I001FG	1	On request	