




Company name:

Created by:

Phone:

Date: 17/01/2026

Description	Value
General information:	
Product name:	DDE 6-10
	PR-PP/E/C-X-31U2U2FG
Product No:	On request
EAN number:	On request
Technical:	
Max. Flow:	6 l/h
Min flow:	6.0 ml/h
Turn-down ratio:	1:1000
Approvals:	CE,CSA-US,EAC,RCM
Valve type:	Standard
Model:	A
Maximum viscosity at 100 %:	50 mPas
Maximum viscosity in slow mode 50 %:	N/A mPas
Maximum viscosity in slow mode 25 %:	N/A mPas
Accuracy of repeatability:	5 %
Materials:	
Dosing head:	PP (Polypropylene)
Valve ball:	Ceramic
	Al ₂ O ₃
Gasket:	EPDM
Installation:	
Range of ambient temperature:	0 .. 45 °C
Maximum operating pressure:	10 bar
Type of inlet connection:	Hose
Type of outlet connection:	Hose
Installation set (Yes/No):	NO
Installation type:	No installation set
Size of inlet connection:	4/6, 6/9, 6/12, 9/12
Size of outlet connection:	4/6, 6/9, 6/12, 9/12
Max. Suction lift during operation:	6 m
Max. Suction lift during priming:	2 m
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 45 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input P1:	19 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 100-240 V
Enclosure class (IEC 34-5):	IP65 / TYPE 4X
Length of cable:	1.5 m
Power plug:	Schuko plug
Inrush current:	25A at 230V for 2ms
Controls:	
Control variant:	PR
Level control:	YES
Pulse control:	YES
Ext. Stop input:	Yes
Output relays:	Yes
Others:	
Net weight:	2.03 kg
Gross weight:	2.63 kg

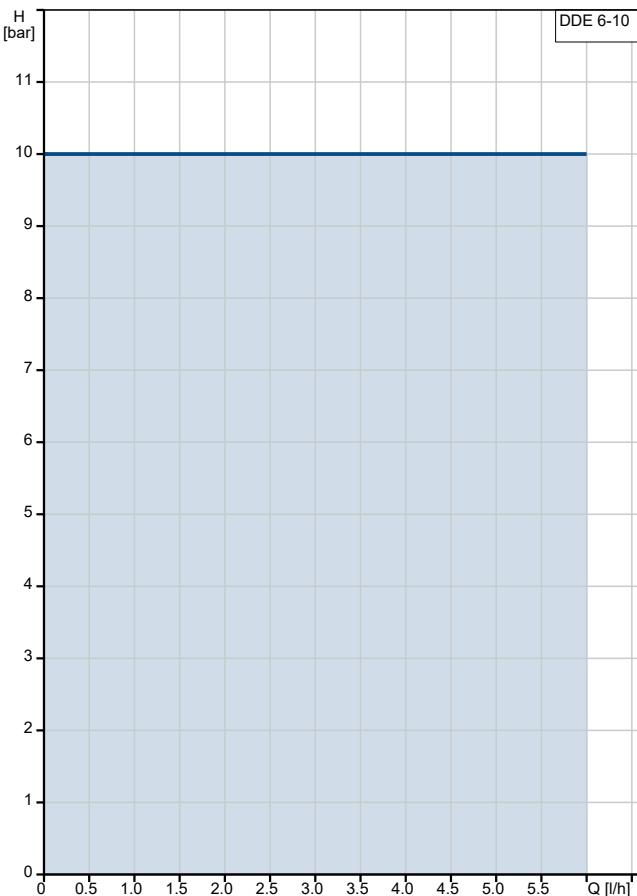

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³



Company name:

Created by:

Phone:

Date:

17/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		DDE 6-10 PR-PP/E/C-X-31U2U2FG	1	On request	