



Company name:


Created by:

Phone:

Date:

19/01/2026

Description	Value
General information:	
Product name:	DMH 2,4-10 B-SS/T/SS-X-41AAXE5AG
Product No:	On request
EAN number:	On request
Technical:	
Nominal flow rate at 50 Hz:	2.4 l/h
Number of dosing heads:	1
Approvals:	CE,ATEX,EAC,CNROHSEX
Non return valve type, inlet pump 1:	Standard
Non return valve type, outlet pump 1:	Standard
Max viscosity:	300 mPas
Materials:	
Pump housing:	Aluminium
Dosing head, pump 1:	Stainless steel EN 1.4571
Valve ball:	Stainless steel
Valve ball:	EN 1.4401
Valve seat:	Composite
Valve seat:	PTFE
Valve gasket:	PTFE
Valve gasket:	Composite
Installation:	
Max operating pressure at 50 Hz:	10 bar
Maximum permissible inlet pressure:	8 bar
Type of inlet connection:	Rp
Type of outlet connection:	Rp
Size of inlet connection:	1/4 inch
Size of outlet connection:	1/4 inch
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 90 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	0.2 kW
Mains frequency:	50 Hz
Max. frequency:	100 Hz
Rated voltage:	3 x 230/400 V
Enclosure class (IEC 34-5):	IP65
Cable included (Yes/No):	N
Power plug:	No plug
Controls:	
Type of connector:	No plug
Type of control variant:	Standard
Frequency converter:	Prepared for VFD
Others:	
Net weight:	14 kg
Gross weight:	25.3 kg
Shipping volume:	0.156 m³
Diaphragm Leakage Detection:	N

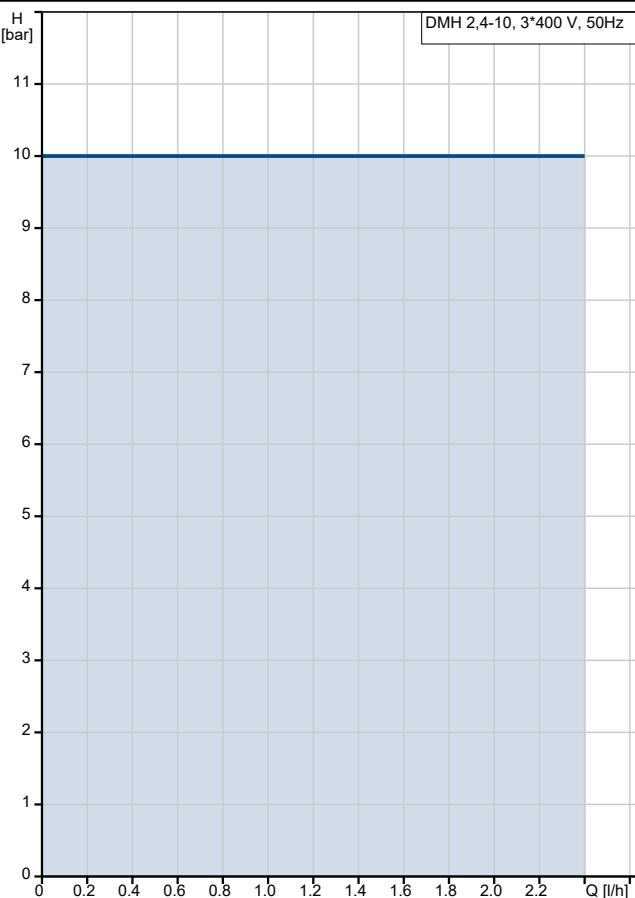

Pumped liquid = Water

Liquid temperature during operation = 20 °C

Density = 998.2 kg/m³



Company name:

Created by:

Phone:

Date:

19/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		DMH 2,4-10 B-SS/T/SS-X-41AAXE5AG	1	On request	