

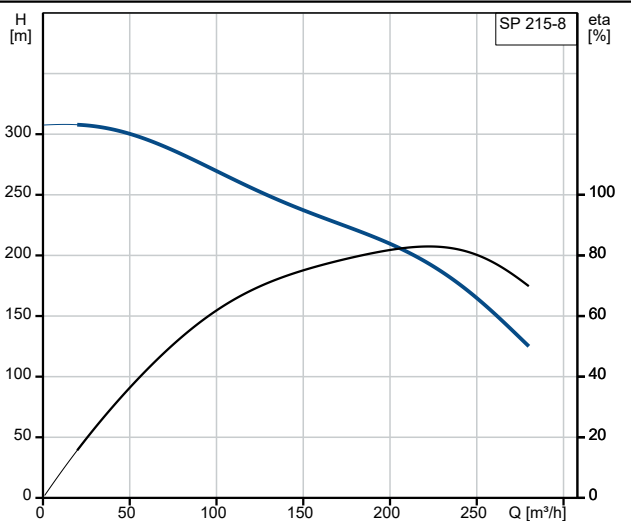


Description	Value
General information:	
Product name:	SP 215-8
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	215 m³/h
Rated head:	199 m
Stages:	8
Number of reduced-diameter impellers:	NONE
Approvals:	CE, EAC, UKCA, SEPRO, MOR OCCO
Approvals for drinking water:	ACS, DM174
Curve tolerance:	ISO9906:2012 3B
Model:	C
Return valve:	YES
Materials:	
Pump:	Stainless steel
	EN 1.4301
	AISI 304
Impeller:	Stainless steel
	EN 1.4301
	AISI 304
Installation:	
Maximum operating pressure:	60 bar
Maximum outlet pressure:	32.3 bar
Type of connection:	Rp
Size of connection:	6 inch
Motor diameter:	8 inch
Minimum borehole diameter:	257 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-15 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor flange design:	Grundfos
Power (P2) required by pump:	147 kW
Others:	
Net weight:	124 kg
Gross weight:	168 kg
Shipping volume:	0.393 m³

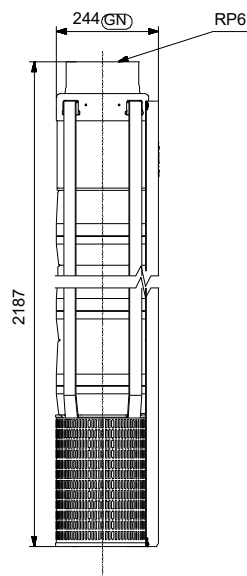

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

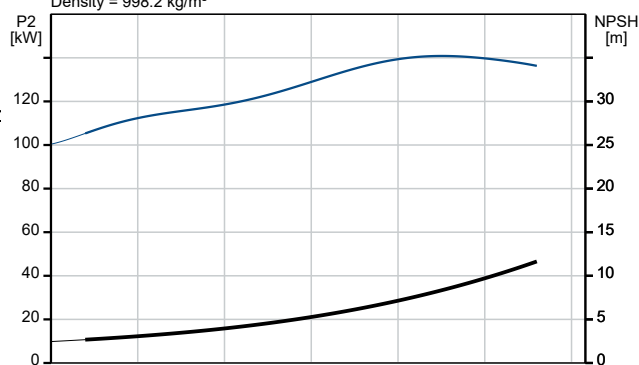

13/01/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		SP 215-8	1	On request	