



Description	Value
General information:	
Product name:	Unilift CC9 - A1
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	1.88 l/s
Maximum flow:	3.89 l/s
Rated head:	6.56 m
Maximum head:	9 m
Max. Particle:	10 mm
Approvals:	CE,LGA,VDE,UKCA,SEPRO
Materials:	
Pump housing:	Polypropylene
	PP - GF15
Impeller:	Composite
	PP 20 GF
Motor:	Stainless steel
	EN 1.4301
	AISI 304
Shaft:	Stainless steel
	EN 1.4301
	AISI 304
Strainer:	Stainless steel
	EN 1.4301
	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	R
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	780 W
Rated power - P2:	0.465 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.5 A
Rated speed:	2850 rpm
Capacitor size - run:	8 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Ex-protection standard:	YES
Length of power cable:	10 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	A
Others:	
Net weight:	6.79 kg
Gross weight:	7.55 kg
Shipping volume:	0.017 m³
Danish VVS No.:	391280391
Swedish RSK No.:	5885926
Norwegian NRF no.:	9045642
Country of origin:	HU

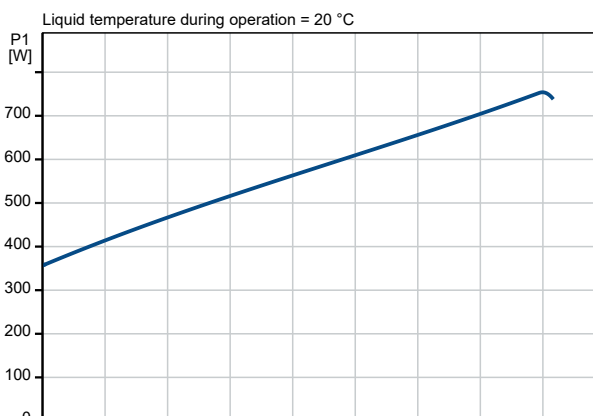

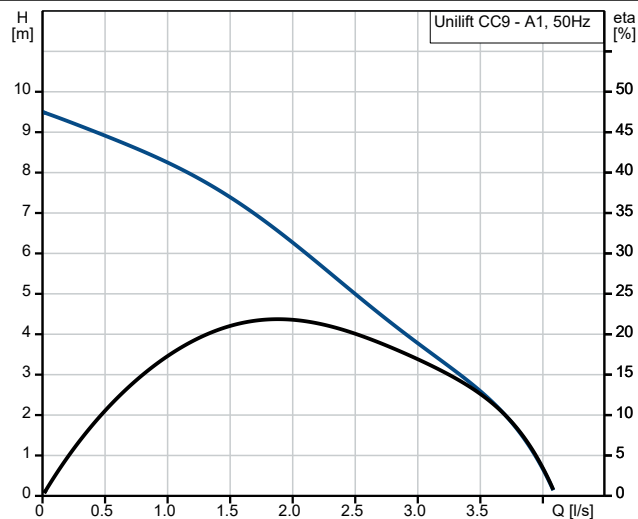

Company name:

Created by:

Phone:

Date:

17/01/2026

Description	Value
Custom tariff no.:	84137021
Environmental approvals:	WEEE

