

Technical data sheet

225-230T-05

Rotary drive without spring return

Description

Actuator for adjusting air dampers of 90° angle of rotation to be used in HVAC installations.

- **Torque Motor** 5 Nm
- **Nominal Voltage** 230 VAC/DC
- **Control** 2/3 Point
- **Damper size** up to approx. 1 m²
- **Damper coupling** Clamp
Ø 8-12 mm / Ø 8-16 mm



Technical data

Electrical data	
Nominal voltage	230 VAC/DC
Nominal voltage range	85...265 VAC
Power consuption motor (motion)	1,5 W
Power consuption standby (end position)	1,0 W
Wire sizing	3,5 VA
Control	2/3 point
Position feedback	-
Auxiliary switch	-
Contact load	-
Switching point	-
Connection Motor	screw terminals, on cable 0,5...1,5mm ²
Connection Auxiliary switch	-
Connection Position feedback	-
Connection GUAC	-
Functional data	
Torque Motor	> 5 Nm
Synchronised speed	-
Direction of rotation	selected by switch
Manual override	Gearing latch disengaged with pushbutton, self-resetting
Angle of rotation	0°... max. 95° Can be limited with adjustable mechanical end stop min 20°
Running time Motor	60...120 s / 90°
Sound power level Motor	< 35 dB(A)
Damper coupling	clamp Ø 8-12 mm/ Ø 8-16 mm
Position indication	mechanical with pointer

Technical data

Functional data	Service life	> 60'000 cycles (0° - 95° - 0°)
Safety	Protection class	II (double insulation)
	Degree of protection	IP 52 (Cable port downwards)
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1 (EN 60730-1)
	Rated impulse voltage	4 kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature normal operation	-30°...+50°
	Storage temperature	-30°...+80°
	Ambient humidity	5...95% r.F., non-condensating (EN 60730-1)
	Maintenance	maintenance free
Dimensions/ Weight	Dimensions	145 x 65 x 61 mm
	Weight	ca. 530 g

Operating mode / Properties

Operating mode

2- point.

Through connecting the power supply to 1+2 and the direction of rotation switch on position "R" moves the actuator to position 1. If also 1+2+3 connected to the power supply the actuator is moving to position 0.

3- point.

Through connecting the power supply to 1+2 and the direction of rotation switch on position "R" moves the actuator to position 1. If the power supply is interrupted the actuator maintains its current position. If also 1+3 connected to the power supply the actuator is moving in direction 0.

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override

Manual override is possible with the self-resetting pushbutton (the gearing latch remains disengaged as long as the pushbutton is pressed)

Rotary direction switch

R/ CW = clockwise

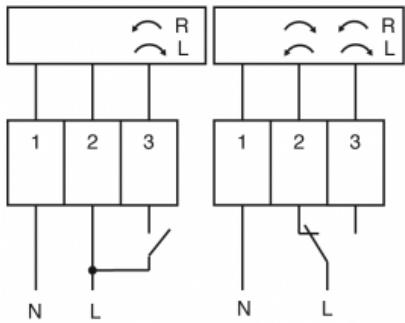
L/ CCW = counter clockwise



L / CCW

R / CW

Connection / Safety remarks

**Safety remarks**

- Attention mains voltage
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

