

## Technical data sheet

## 363-230-20G-S2-P5

## Rotary actuator

## Description

Rotary actuator for adjusting dampers in HVAC installations

- Running time 60 s / 90°
- Torque 20 Nm
- Nominal voltage 230 VAC/DC
- Control 2-/3-point
- Feedback potentiometer P5 = 5 kΩ
- Auxiliary switch 2x freely adjustable up to approx. 4 m<sup>2</sup>
- Damper size clamp
- Shaft coupling Ø 9-18 mm / Ø 9-26 mm



## Technical data

Electrical data	Nominal voltage	230 VAC/DC, 50/60 Hz
Nominal voltage range	85...265 VAC/DC	
Power consumption motor (motion)	4,0 W	
Power consumption standby (end position)	1,5 W	
Wire sizing	7,0 VA	
Control	2-/3-point	
Feedback signal	potentiometer 5 kΩ	
Auxiliary switch	2 x SPDT (Ag)	
Contact load	5 (2,5) A, 250 VAC	
Switching point	0...95°	
Connection motor	cable 1000 mm, 3 x 0,75 mm <sup>2</sup> (halogen free)	
Connection feedback potentiometer	cable 1000 mm, 3 x 0,75 mm <sup>2</sup> (halogen free)	
Connection auxiliary switch	cable 1000 mm, 6 x 0,75 mm <sup>2</sup> (halogen free)	
Connection GUAC	-	

Functional data	Torque	20 Nm

## Technical data

Functional data		
Damper size	up to approx. 4 m <sup>2</sup>	
Synchronised speed	±5%	
Direction of rotation	selected by switch	
Manual override	gearing latch disengaged with pushbutton, self-resetting	
Angle of rotation	0°...max. 95° can be limited with adjustable mechanical end stops	
Running time	60 s / 90°	
Sound power level	< 45 dB(A)	
Shaft coupling	clamp $\diamond$ 9-18 mm / Ø 9-26 mm	
Position indication	mechanical with pointer	
Service life	> 60 000 cycles (0°...95°...0°)	
Safety		
Protection class	II (double insulation)	
Degree of protection	IP 54	
EMC	CE (2014/30/EU)	
LVD	CE (2014/35/EU)	
RoHS	CE (2011/65/EU - 2015/863/EU - 2017/2102/EU)	
Mode of operation	Typ 1 (EN 60730-1)	
Rated impulse voltage	4 kV (EN 60730-1)	
Control pollution degree	3 (EN 60730-1)	
Ambient temperature normal operation	-30°C...+50°C	
Storage temperature	-30°C...+80°C	
Ambient humidity	5...95% r.H., non condensing (EN 60730-1)	
Maintenance	maintenance free	
Dimensions / Weight		
Dimensions	193 x 96 x 60 mm	
Weight	1800 g	

## Functionality / Properties

### Operating mode

2 point:  
Connect power supply to wire 1+2, actuator drives to position 1. Is also wire 3 connected to the power supply, actuator drives to position 0.

3 point:  
Connect power supply to wire 1+2, actuator drives to position 1. Is wire 1+3 connected to the power supply, actuator drives to position 0.

The actuator is overload-proof, requires no limit switches and automatically stops, when the end stop is reached.

### Direct mounting

Simple direct mounting on the damper shaft with a clamp, protection against rotating with enclosed anti-rotation lock or rather at intended attachment points.

### Manual override

Manual override with self-resetting pushbutton possible (the gear is disengaged as long as the button is pressed).

### Signaling


The two integrated auxiliary switches are freely adjustable in the angle of 0 - 95°. There are activated corresponding to the adjusted angle. The damper position can be checked by the mechanical pointer.

### Mode switch



DIP switch under the case cover

R / CW: rotary direction right / clockwise

L / CWW: rotary direction left / counter clockwise

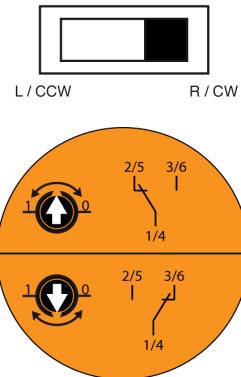

## Connector / Security Note

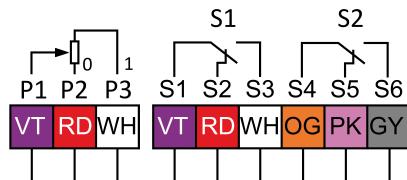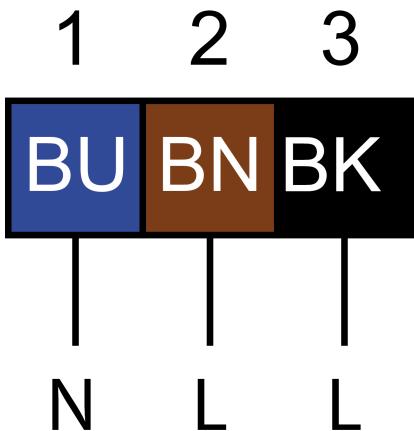

## Safety remarks

- Caution: power supply voltage!
- The device is not allowed to be used outside the specified field of application, especially in airplanes.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- The device is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- When calculating the required torque, the specifications supplied by the damper manufacturer's (cross-section, design, installation site), and the air flow conditions must be observed.

## Technical Drawing

