


Connecting cable with socket

AD0AH040MSN0005A04

Article no longer available - archive entry

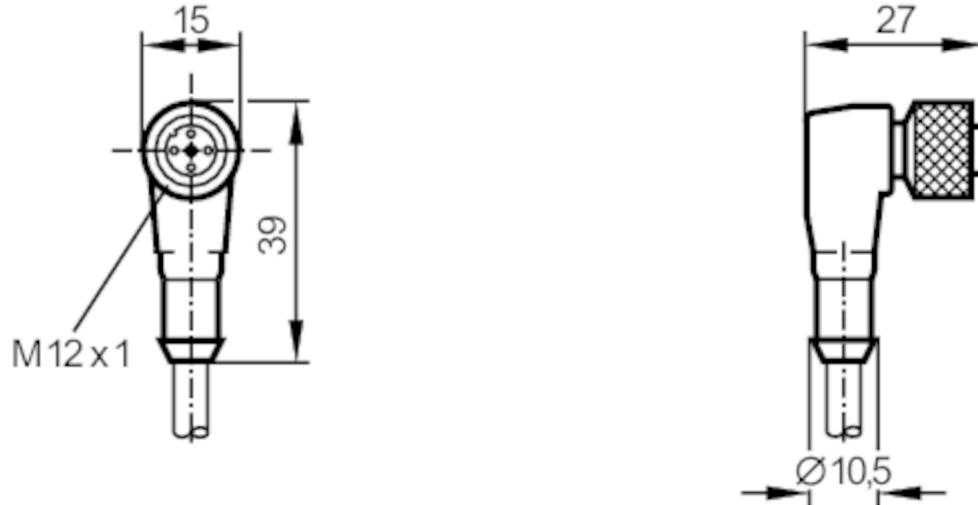

Application

Application	Ex zone 1
-------------	-----------

Electrical data

Operating voltage	[V]	< 15 DC
-------------------	-----	---------

Operating conditions

Ambient temperature	[°C]	-25...90
---------------------	------	----------

Protection	IP 67
------------	-------

Safety classification

Max. internal capacitance	[nF]	0.49
---------------------------	------	------

Max. internal inductance	[µH]	10
--------------------------	------	----

Mechanical data

Dimensions	[mm]	27 x 15 x 39
------------	------	--------------

Materials	TPU
-----------	-----

Material nut	brass, nickel-plated
--------------	----------------------

Remarks

Remarks	When using sockets in hazardous areas (ATEX) there are special requirements regarding wiring.
---------	---

	The requirements of the applicable installation regulations must be absolutely adhered to by the user on his own responsibility.
--	--

Pack quantity	1 pcs.
---------------	--------

Electrical connection


Cable: 5 m, PUR / PVC, blue, Ø 5 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm²)

Electrical connection - socket


Connector: 1 x M12, angled; Moulded body: TPU; Locking: brass, nickel-plated; Tightening torque: 0.5 Nm

Connecting cable with socket

AD0AH040MSN0005A04



Connection

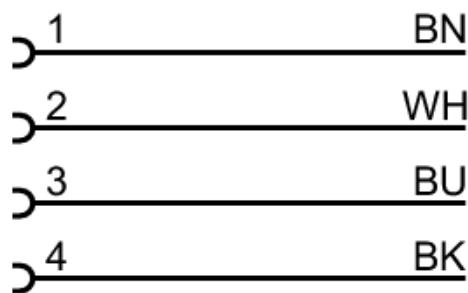

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white

Article no longer available - archive entry