


Wirable socket

SDOAL070PLSFKPG

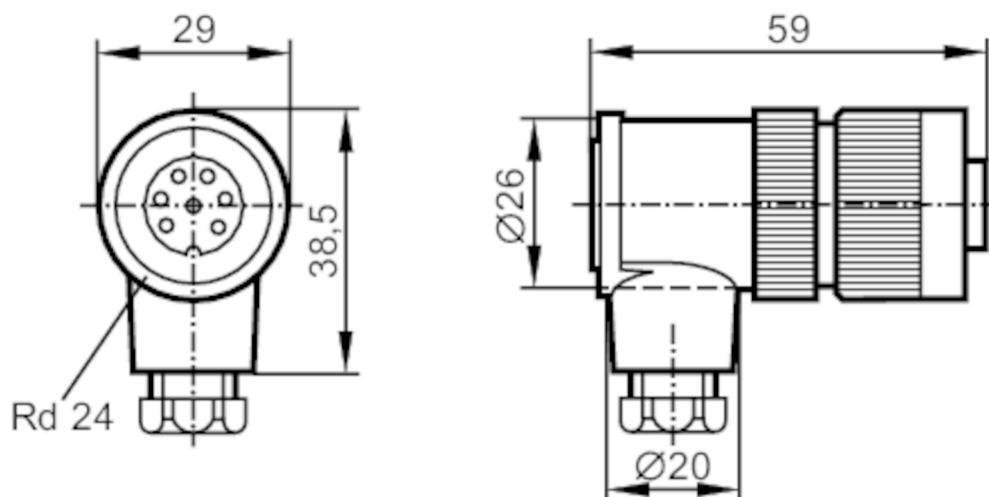

Application

Special feature

Gold-plated contacts

Electrical data

Operating voltage

[V]

< 250 AC / < 300 DC

Operating conditions

Ambient temperature

[°C]

-40...100

Protection

IP 67

Mechanical data

Weight

[g]

43.8

Dimensions

[mm]

59 x 29 x 38.5

Materials

PBT

Material nut

PA

Remarks

Pack quantity


1 pcs.

Electrical connection

terminals: ...2.5 mm²; Cable sheath: Ø 6...8 mm

Electrical connection - socket

Connector: 1 x Rd24, angled; Moulded body: PBT; Locking: PA; Contacts: gold-plated



E11043

Wirable socket

SDOAL070PLSFKPG



Connection

