

E11486





Connecting cable with socket

ADOGF030MSS0002H03

Article no longer available - archive entry

replaced by: EVC141



Application		
Special feature		Free from silicone; Halogen-free; Gold-plated contacts
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 60 AC / < 75 DC
Protection class		III
Max. current load total	[A]	3
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 68
Mechanical data		
Dimensions	[mm]	10 x 10 x 31
Materials		PUR
Material nut		brass, nickel-plated / brass, nickel-plated
Remarks		
Pack quantity		1 pcs.


**Connecting cable with socket**

ADOGF030MSS0002H03

Electrical connectionCable: 2 m, PUR, Halogen-free, black, Ø 4.1 mm; 3 x 0.25 mm² (32 x Ø 0.1 mm)**Electrical connection - socket**

Connector: 1 x M8, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...0.7 Nm

Connector: 1 x M8, straight; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.6...0.7 Nm

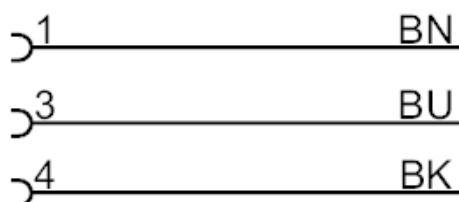**Connection**

Core colours :

BK = black
BN = brown
BU = blue

Article no longer available - archive entry

replaced by: EVC141