

TT0061


Temperature probe sensor

TT-050KCED10- /US/ /V



Article no longer available - archive entry

Alternative article: TT0291 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!

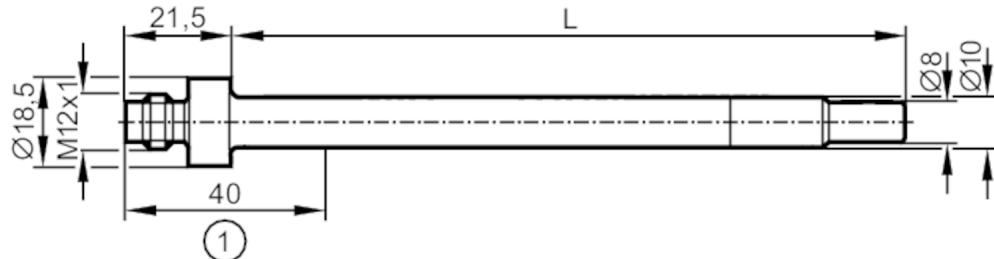

1 plug area

L = Probe length corresponds to installation length EL



Product characteristics

Measuring range		-40...150 °C	-40...302 °F
Installation length EL	[mm]		110

Application

System	gold-plated contacts
Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)
Application	hygienic systems
Media	liquids and gases
Pressure rating	[bar]
Minimum installation depth	[mm]

Electrical data

Protection class		III
------------------	--	-----

Measuring/setting range

Probe length L	[mm]	110
Measuring range		-40...150 °C

Accuracy / deviations

Accuracy	[K]	± (0,15 K + 0,002 x t)
----------	-----	--------------------------

Reaction times

Dynamic response T05 / T09	[s]	1 / 3; (according to DIN EN 60751)
----------------------------	-----	------------------------------------

Operating conditions

Ambient temperature	[°C]	-25...80
Note on ambient temperature		plug area
Storage temperature	[°C]	-40...100
Protection		IP 68; IP 69K

Tests / approvals

Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF	[years]		22831

Temperature probe sensor

TT-050KCED10- /US/ /V

Mechanical data


Weight	[g]	42.4
Dimensions	[mm]	Ø 10
Material		stainless steel (1.4404 / 316L)
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Surface characteristics Ra/Rz of the wetted parts		Ra: < 0.6
Probe diameter	[mm]	10
Installation length EL	[mm]	110

Remarks


Remarks	The values for accuracy apply to flowing water. The 3-A qualification is only valid if adapters with 3-A qualification are used for installation.
Notes	Discontinued article
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

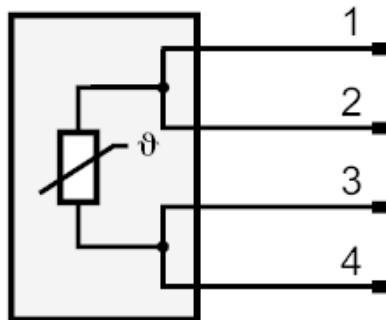

Article no longer available - archive entry

Alternative article: TT0291 When selecting an alternative article and accessories please note that technical data may differ! – When selecting an alternative article and accessories please note that technical data may differ!