


INOXIHP
ABOUT USING WATER



PM 400


Reciprocating Horizontal
Quintuplex Plunger Pumps



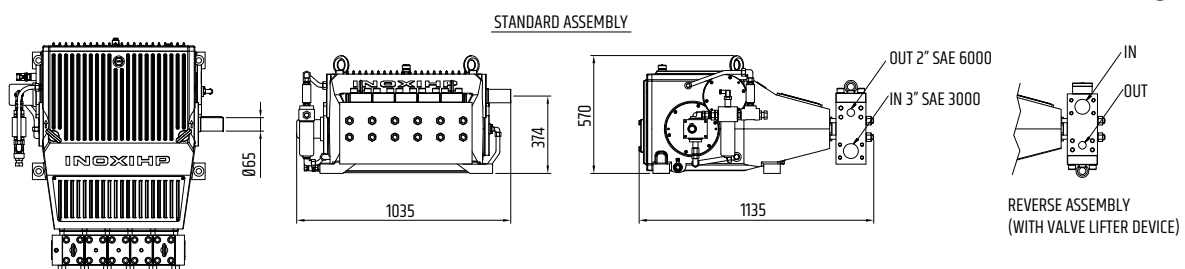


Selection Diagram

PM 400 - 50 Hz 4 POLES ELECTRIC MOTOR (1500 RPM) - MAX ABSORBED POWER 285 kW

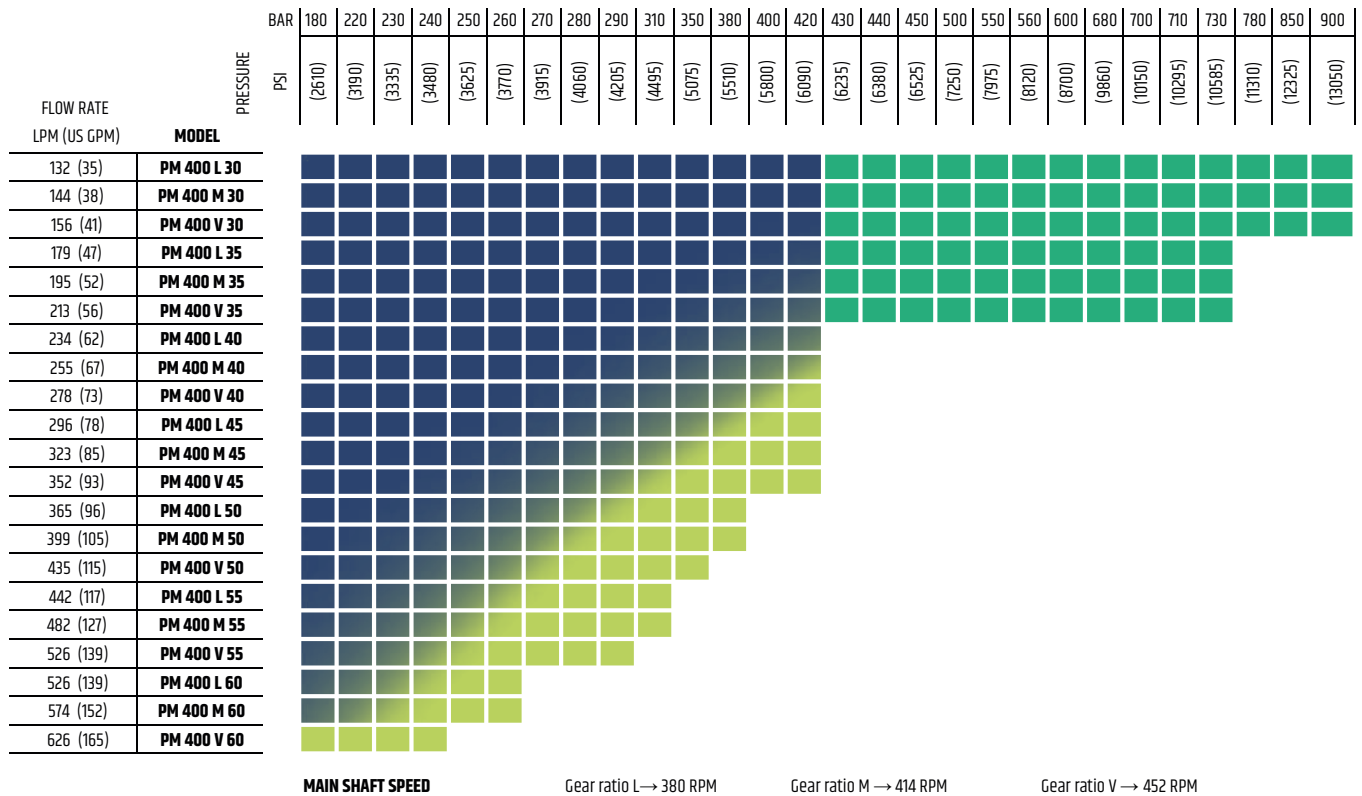

PM 400 - 60 Hz 4 POLES ELECTRIC MOTOR (1800 RPM) - MAX ABSORBED POWER 285 kW

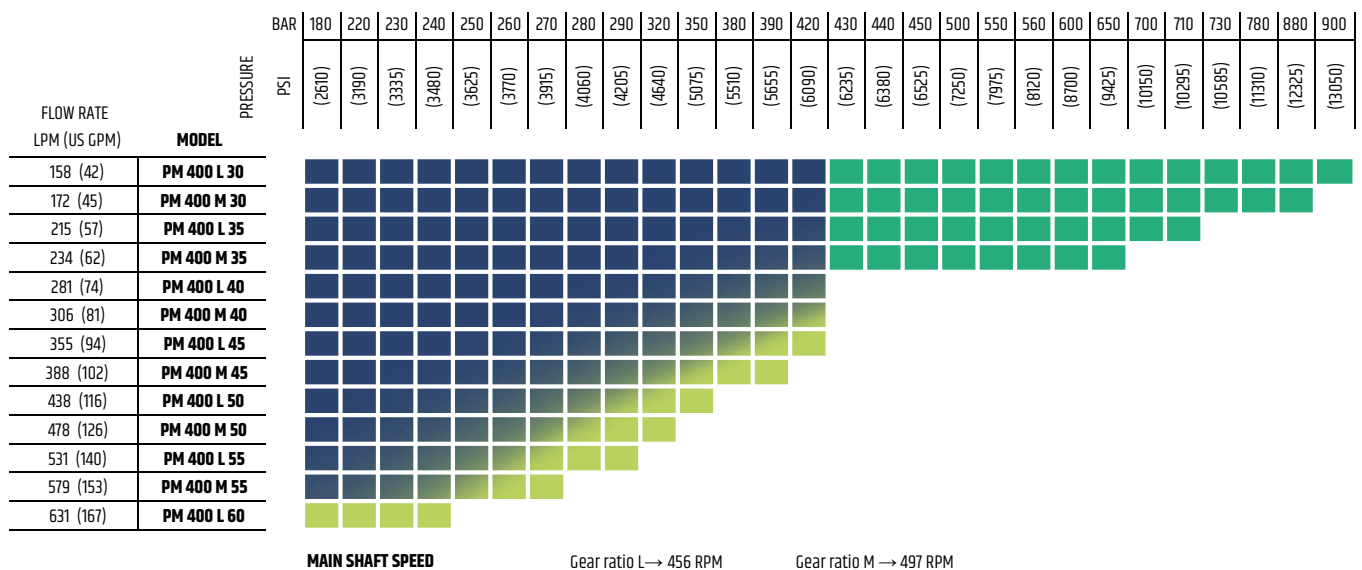

Also covered by smaller pump models Q42/43 Hydraulic head Q10/11 Hydraulic head

1 MPa = 10 bar. The pump performances are referred to a volumetric efficiency of 100% and a mechanical efficiency of 89%, with water at 20°C. Input speed range 900-1800 r.p.m. For performances and uses other than the ones listed in this catalogue, please contact INOXIHP technical office for assistance.

Mining Skid

Inoxihp supplies complete skids for underground coal mining (Longwall) for applications such as tunnel roof support, rotating blade cooling (shearer) and dust suppression.

Highly reliable products, also available in ATEX version.



INOXHIP S.r.l.

IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89 - Tel: +39 0362 190111
Fax: +39 0362 1901008 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHIP
ABOUT USING WATER