




PM 550

Reciprocating Horizontal
Quintuplex Plunger Pumps

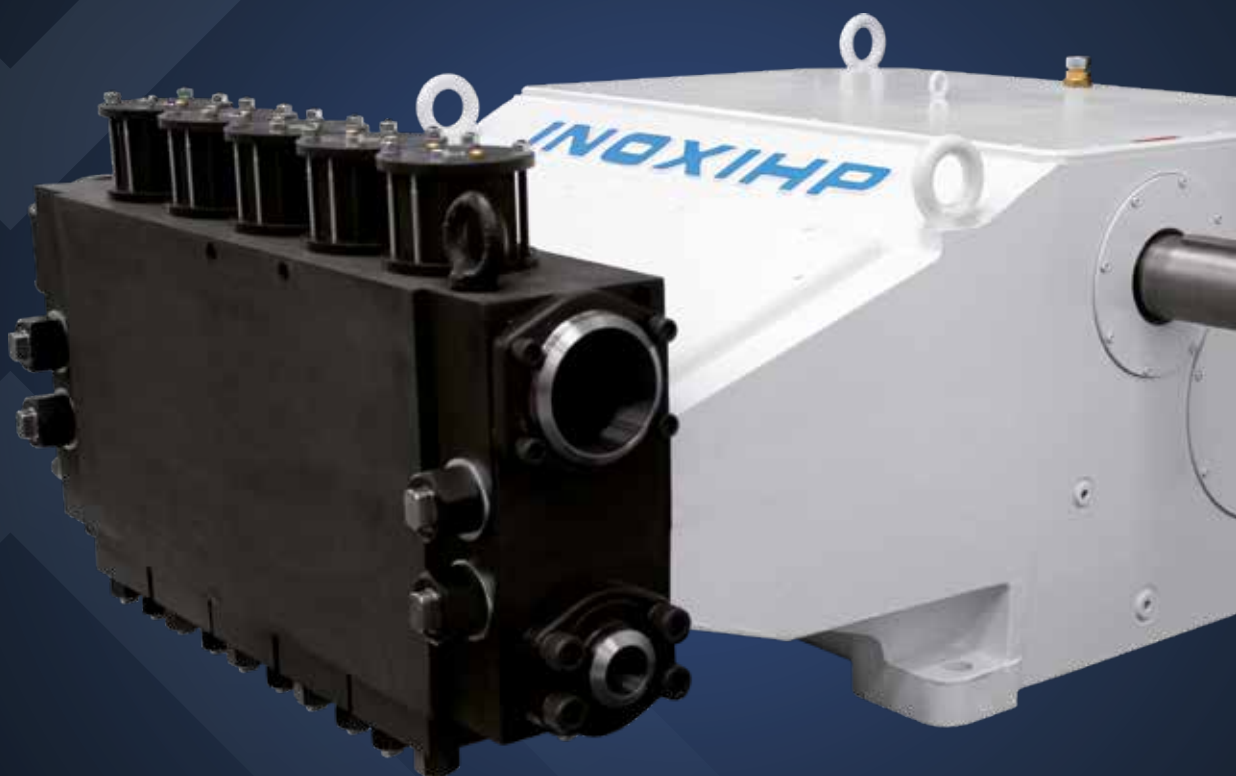

PM 550



General features

- Compact dimension
- Low noise
- Forced lubrication system
- Easy maintenance
- Low maintenance costs
- Internal double reduction gear with helical gears
- Input shaft can be placed on either side of the pump
- Self-adjusting seal packing
- Pumping package cooling system
- Available with carbon steel or stainless steel hydraulic head
- Low vibrations
- Constant hydraulic flow with minimal pulsation: no pulsation dampener required
- 100% aluminium free


Accessories

- Valve lifter controlled by means of pneumatic solenoid
- Unloading valve
- Over-pressure valve
- HP check valve
- Suction and/or delivery gauge
- Low and high pressure switches
- Manifold groups for suction/delivery
- ATEX Group I Category M2 Certification

Applications


- Emulsion Hydraulic power to drive
- Longwall systems
- Dust suppression systems on Roof
- Supports & Coal Shearers

Pulsation diagram

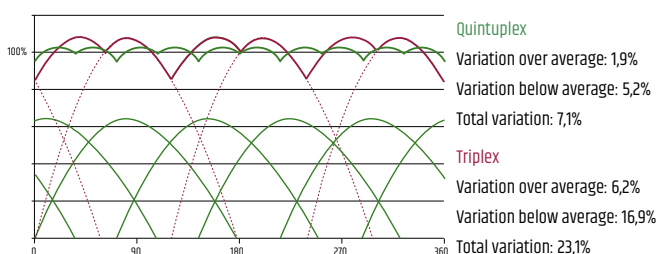


Identification code

see tables on the next page >>>

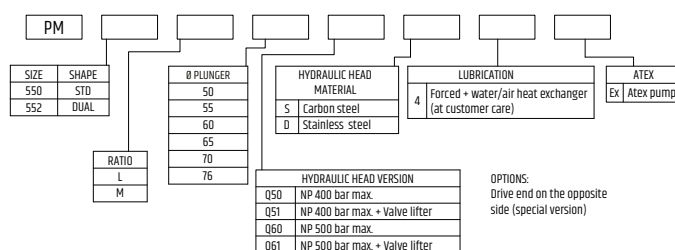


Dimensions

Dimensions are referred to hydraulic head Q50
 Weight: kg 3045

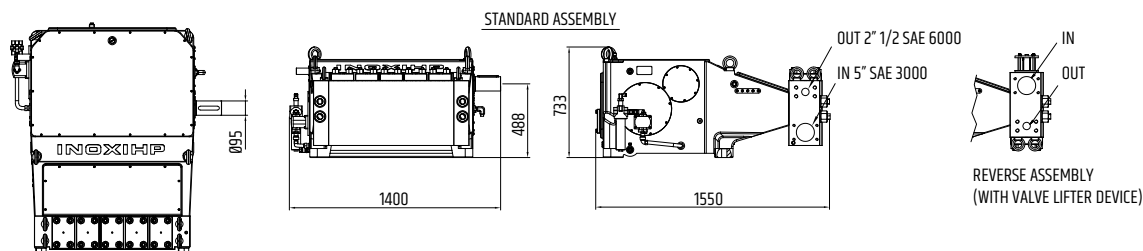


Selection Diagram

PM 550 - 50 Hz 4 POLES ELECTRIC MOTOR (1500 RPM) - MAX ABSORBED POWER 550 kW

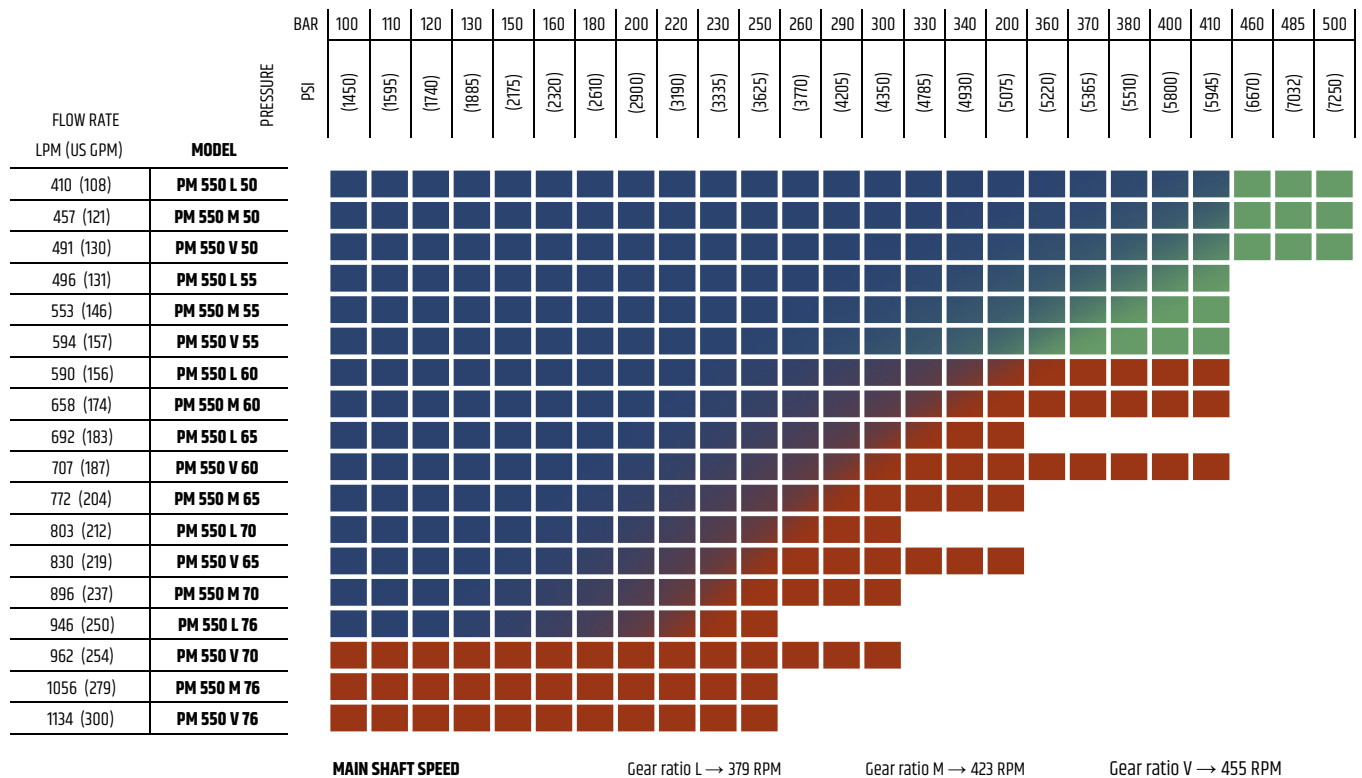

PM 550 - 60 Hz 4 POLES ELECTRIC MOTOR (1800 RPM) - MAX ABSORBED POWER 550 kW

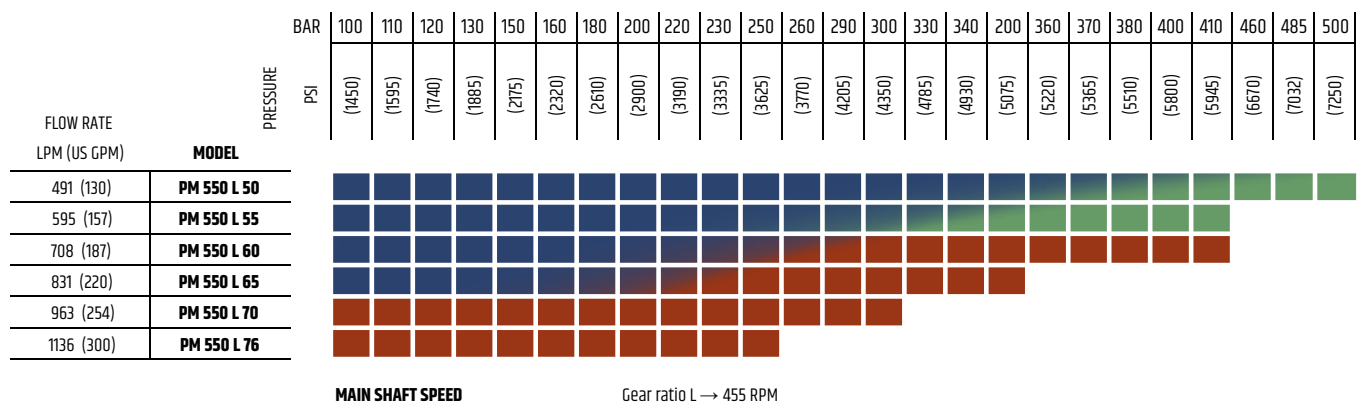

Also covered by smaller pump models Q50/Q51 Hydraulic head Q60/Q61 Hydraulic head

1 MPa = 10 bar. The pump performances are referred to a volumetric efficiency of 100% and a mechanical efficiency of 89%, with water at 20°C.
Input speed range 900-1800 r.p.m. For performances and uses other than the ones listed in this catalogue, please contact INOXIHP technical office for assistance.

Mining Skid

Inoxihp supplies complete skids for underground coal mining (Longwall) for applications such as tunnel roof support, rotating blade cooling (shearer) and dust suppression.

Highly reliable products, also available in ATEX version.



INOXHIP S.r.l.

IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89 - Tel: +39 0362 190111
Fax: +39 0362 1901008 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHIP
ABOUT USING WATER