

VDT

Decompression Valve Oil Actuated



General features

- High reliability for heavy and continuous duties
- Metal-to-metal seal
- Easy maintenance
- Equipped with two proximity switches

Options

- Special flange drilling

Applications


- Designed to be used in hydraulic testing

Technical data

Fluid:	Water and HFA
Function:	NO
Working pressure:	Up to 200 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Hydraulic oil 8 ÷ 22 MPa (temperature +10°C ÷ +30°C)
Electrical input:	24 V dc - 110/220 V
Connections:	SAE6000 drilling (up to 42 MPa) Panel (up to 200 MPa)
Materials:	Body in carbon steel, internal parts in stainless steel

Valves sizes

INOXIHP	ND	inches
02	10	3/8"
03	15	1/2"
04	20	3/4"
05	25	1"
06	32	1 1/4"
07	40	1 1/2"
08	50	2"
09	65	2 1/2"
10	80	3"

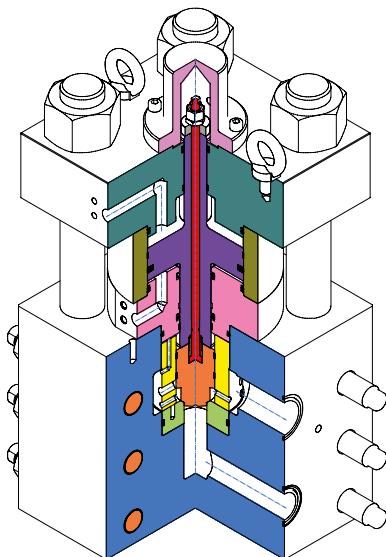

INOXIHP S.r.l.

IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89 - Tel: +39 0362 190111
Fax: +39 0362 1901008 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHP
ABOUT USING WATER