


INOXIHP
ABOUT USING WATER



VFT

Shuttle Valve Air and Oil Actuated

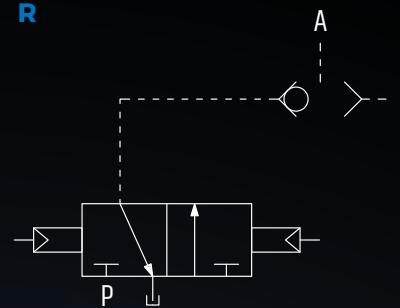

General features

- High reliability for heavy and continuous duties
- Metal-to-metal seal

Options

- Interface for existing cylinders
- Hydraulic cylinders
- Special flange

Applications


- Designed to be used in hydraulic testing

Technical data

Fluid:	Water and HFA
Working pressure:	Up to 200 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Hydraulic oil 8 ÷ 22 MPa (temperature +10°C ÷ +30°C)
Electrical input:	24 V dc - 110/220 V
Connections:	SAE6000 drilling (up to 42 MPa) Panel (up to 200 MPa)
Materials:	Body in carbon steel, internal parts in stainless steel

Valves sizes

INOXHIP	ND	inches
02	10	3/8"
03	15	1/2"
04	20	3/4"

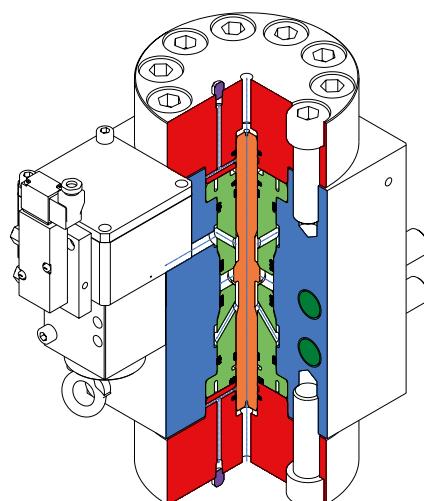

INOXHIP S.r.l.

IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89 - Tel: +39 0362 190111
Fax: +39 0362 1901008 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXHIP
ABOUT USING WATER