


INOXIHP
ABOUT USING WATER



VSP

Anti-fall Valve
Air and water actuated



General features

- Full bore valve
- Spool NC position guaranteed by the spring
- Metal-to-metal seal
- Equipped with two proximity switches

Options

- Interface for existing cylinders
- Flow regulator
- Special flange

Applications


- Designed to be used to prevent undesired cylinder movement

Technical data

Fluid:	Water and HFA
Function:	NC
Working pressure:	35 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Lubricated compressed air 5 ÷ 7 bar (0,5 ÷ 0,7 MPa)
Connections:	CETOP400 drilling
Materials:	Body in carbon steel, internal parts in stainless steel

Valves sizes

INOXIHP	ND	inches
07	40	1 1/2"
08	50	2"
09	65	2 1/2"
10	80	3"

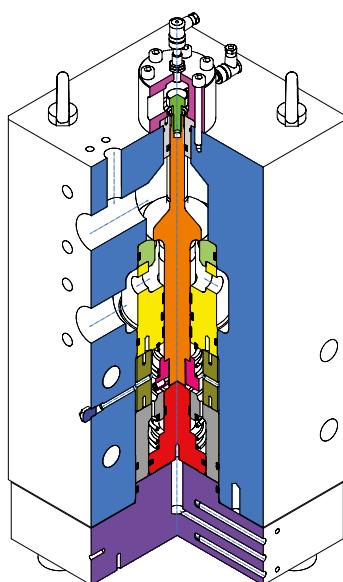

 This valve model is EAC certified



INOXIHP S.r.l.

IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89 - Tel: +39 0362 190111
Fax: +39 0362 190108 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHP
ABOUT USING WATER