

VST

Air Venting Valve
Oil actuated



General features

- Equipped with two proximity switches
- Metal-to-metal seal
- Compact design

Options


- Interface for existing cylinders
- Special flange special flange drilling

Applications

- Designed to be used in hydraulic testing

Technical data

Fluid:	Water and HFA
Function:	NC
Working pressure:	Up to 200 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Hydraulic oil 8 ÷ 22 MPa (temperature +10°C ÷ +30°C)
Electrical input:	24 V dc - 110/220 V
Connections:	INOXIHP drilling (HP) UNI drilling (LP)
Materials:	Body in carbon steel, internal parts in stainless steel

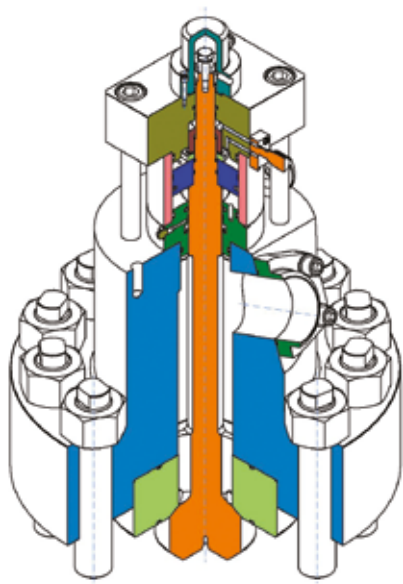

Valves sizes

INOXIHP	ND	inches
03	15	1/2"
04	20	3/4"
05	25	1"
06	32	1 1/4"
07	40	1 1/2"
08	50	2"
09	65	2 1/2"
10	80	3"
11	100	4"
12	125	5"
13	150	6"