



INDUSTRIAL


WE MAGNETISE THE WORLD

## CUSTOM SOLENOIDS &amp; ACTUATORS

Kendrion Mishawaka

## 2-Way Compact Solenoid Valves

The 2-Way Compact Solenoid Valve (CSV) was designed with size and battery life in mind. The CSV uses stamped metal internal components to keep the cost down and improve reliability. The valve was tested beyond 20,000,000 cycles. It can be mounted directly to a Printed Circuit Board (PCB) or have an integral connector for lead wires. The design can be modified extensively to include a number of alternate mounting and interface options (face mount, barb ports, manifold mount).

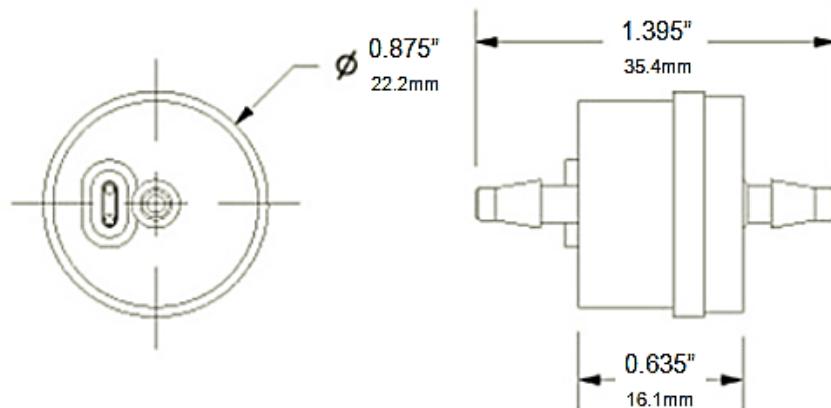

## Technical Specification

Voltage	3 – 24V DC
Response Time	Less than 1ms
Operating Pressure	0-100psi (6.9 bar)
Flow	0.07 cfm (2.0 l/min) max.
Power Consumption	Per Customer Specs
Applications / Comments	In-line Mounting HVAC Control Medical Testing Equipment Automated Equipment Motion Control

07-30-2015

Kendrion (Mishawaka) LLC, 56733 Magnetic Drive  
Mishawaka, IN 46545, USA, [www.kendrion.com](http://www.kendrion.com)